



## Terrazzo-Ware™ Shower Base - "ADA" Series



SBADA-36-3F

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### "ADA" Series Shower Base

**Shower Base** is an attractive, easy to maintain, spacious shower receptacle. It is designed for durability, for ease of installation and for use in **ADA**, Americans With Disabilities Act, compliant installations (check with local code authorities). Shower walls by others must be built out to cover shower base shoulders and match 36" square (SBADA-36) or 60" x 30" (SBADA-6030) ADA compliant inside dimensions. **ACORN Terrazzo-Ware™** precast shower bases provide flexibility in configuration and size as required by the design of the building and the specific installation. Custom sizes and colors are also available.

**Wheelchair Access** to both the 36" square seat type shower stall and the 30" x 60" roll in type shower stall is provided by an open end. We recommend a floor drain be provided by others near the shower entrance. The sides and rear of the fixture come with galvanized tiling flanges extending 1½" above the 1½" wide shoulder to allow others to construct tiled walls.

**Construction** is one piece, precast terrazzo composed of marble chips cast in Portland cement to provide a compressive strength of at least 3,000 PSI seven days after casting. The shower base surface is ground smooth and sealed for years of service.

**Integral Drain** is supplied with a removable, stainless steel grid strainer and provides for an inside caulked connection to a 2" pipe. The shower base has coved corners and is pitched to the drain outlet to provide positive drainage. A vandal resistant strainer is optionally available.

#### GUIDE SPECIFICATION

Provide and install an **ACORN "ADA" Series Shower Base** (specify model number and options) designed for use in **ADA**, Americans With Disabilities Act, compliant installations. Shower walls must be built out to inside dimensions. Shower Base shall be made of precast terrazzo to produce a compressive strength of at least 3,000 PSI seven days after casting. Base shall be ground smooth and sealed. No air holes or pits shall be allowed on the finished surface. Base shall have coved corners and be pitched to the drain outlet for positive drainage. Integral drain shall have a stainless steel strainer and provide for an inside caulked connection to a 2" pipe. The manufacturer will provide to the installer the necessary installation instructions.



# Terrazzo-Ware™: Shower Base - "ADA" Series

## BASE MODEL & TYPE

### SIZE (must specify)

- SBADA-36-3F** 36" Terrazzo Shower Base, Square Three Sides Flanged
- SBADA-6030-3F** 60" x 30" Rectangular Roll-In Type Shower Stall Three Sides Flanged
- SBADA-6036-3F** 60" x 36" Rectangular Roll-In Type Shower Stall Three Sides Flanged
- SBADA-6432-3F** 64" x 32" Rectangular Roll-In Type Shower Stall Three Sides Flanged
- SBADA-6438-3F** 64" x 38" Rectangular Roll-In Type Shower Stall Three Sides Flanged

## SUFFIX OPTIONS


- OC Optional Colors (contact factory)
- VRS Vandal Resistant Strainer

## ACCESSORIES

- KDG2 Rubber Drain Gasket for 2" Waste Pipe

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

MODEL NUMBER	TYPE	INTERIOR DIMENSIONS		EXTERIOR DIMENSIONS	
		A – LENGTH	B	C	D
SBADA-36-3F	SQUARE	36" (915)	–	–	–
SBADA-6030-3F	RECTANGULAR	60" (1525)	30" (760)	63" (1600)	31-1/2" (800)
SBADA-6036-3F	RECTANGULAR	60" (1525)	36" (915)	63" (1600)	37-1/2" (950)
SBADA-6432-3F	RECTANGULAR	64" (1625)	32" (810)	67" (1700)	33-1/2" (850)
SBADA-6438-3F	RECTANGULAR	64" (1625)	38" (965)	67" (1700)	39-1/2" (1005)

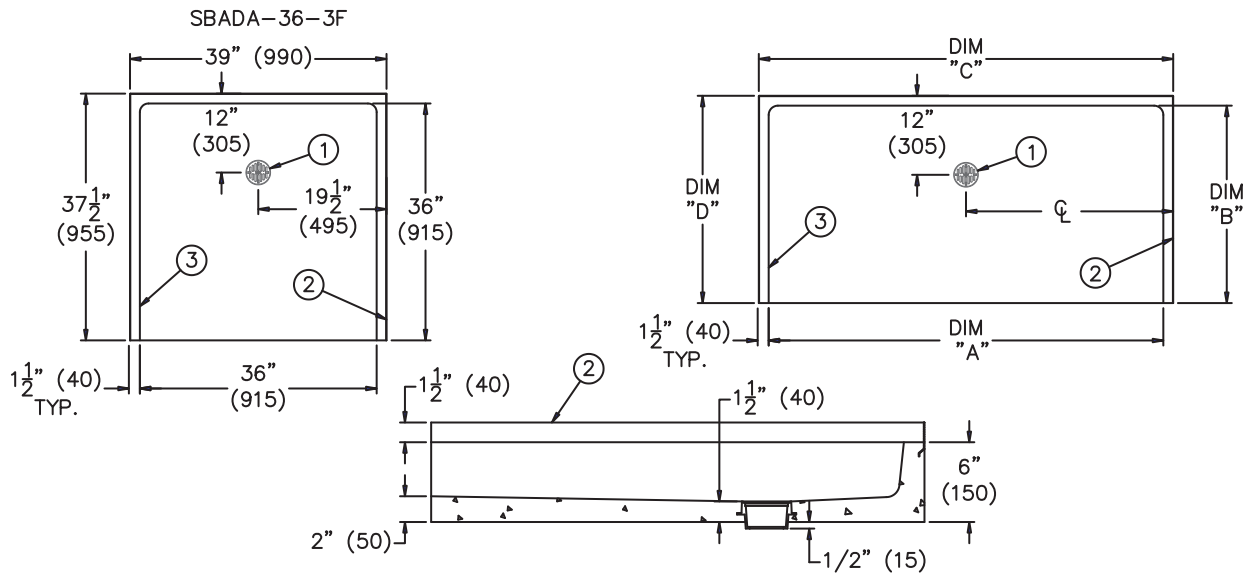

TERRAZZO-WARE ADA SERIES SHOWER BASE

### NOTES:

1. Integral drain with removable grid strainer. Drain provides inside caulk connection to 2" pipe.
2. Tiling flange.
3. Shower base shoulder.

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2003 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>