



Dura-Ware® 1950LC Series

20" Rectangular Lavatory



1950LC-1-CSG-GT-TPT

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

20" Rectangular Lavatory

Fixture is arranged to be installed on a finished wall from the front side utilizing a concealed arm carrier by others. Fixture is fabricated of 16 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish.

Lavatory Rectangular Bowl is 14-1/2" x 9-1/2" x 6" deep. Lavatory deck has an integral self-draining soap dish. Lavatory has a 1-5/8" diameter drain hole to receive optional suffix -GE or -GT grid strainer.

Available Lavatory Valves:

1. Air-Control pneumatically operated, pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is direct acting, non-metering type and is optionally available as metering with non-hold open feature. Metering valve timing is adjustable from 5 to 60 seconds. Valve includes a 2.5 GPM flow control and can be remotely located up to 10 feet from the operating pushbutton. Includes a deck mounted spout.
2. Centerset with gooseneck spout and wristblade handles, Suffix -CSG.
3. Centerset with spout, Suffix -CSS.

GUIDE SPECIFICATION

Provide and install Acorn Dura-Ware 20" wide Rectangular Lavatory (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded. Exterior shall have a satin finish. Lavatory deck shall have an integral air-circulating, self-draining soap dish. Installation shall be made in accordance with manufacturers recommendations and details. Installer shall provide all wall mounting hardware to include concealed arm carrier.



Dura-Ware® 1950LC : 20" Rectangular Lavatory

WALL THICKNESS AND TYPE (Must Specify)

Thickness _____ Type _____

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

1950LC 20" x 15" Rectangular Lavatory

FIXTURE MOUNTING AND WASTE (Must Specify)

- 1 Off-Floor, Wall Outlet

SPOUT SELECTION (Must Specify)

- CSG Centerset with Gooseneck Spout and Wrist Blade Handles
- CSS Centerset with Spout
- DMS Deck Mounted Spout

VALVE SELECTION (Must Specify)

- 3 Air-Control, Single Temperature
- 4 Air-Control, H & C
- 9 Without Valves with -H34 Punching
- EVS1 Electronic Valve System - Single Temp
- EVS2 Electronic Valve System - Hot & Cold
- MVC1 Time-Trol - Single Temp
- MVC2 Time-Trol - Hot & Cold


DECK PUNCHING (Punching Diameter is 1-5/16")

- H1 Single Hole Centered
- H24 Two Holes for 4" Centerset
- H28 Two Holes for 8" Centerset
- H34 Three Holes for 4" Centerset
- H38 Three Holes for 8" Centerset

Product Options

- EE Elbow Enclosure
- EG Enviro-Glaze Color, Specify: _____
- FG 14 Gage Housing
- GE Grid Strainer w/Close Elbow 1-1/4"
- GT Grid Strainer w/Tailpiece 1-1/4"
- IS Integral Shelf
- M Metering
- MA Manifolded Valve __2
- MH Metering Hot Side Only
- OF Lavatory Overflow
- TE Trap Enclosure
- TPT Tubular P-Trap 1-1/4" x 1-1/2"

Please visit www.acorneng.com for most current specifications.

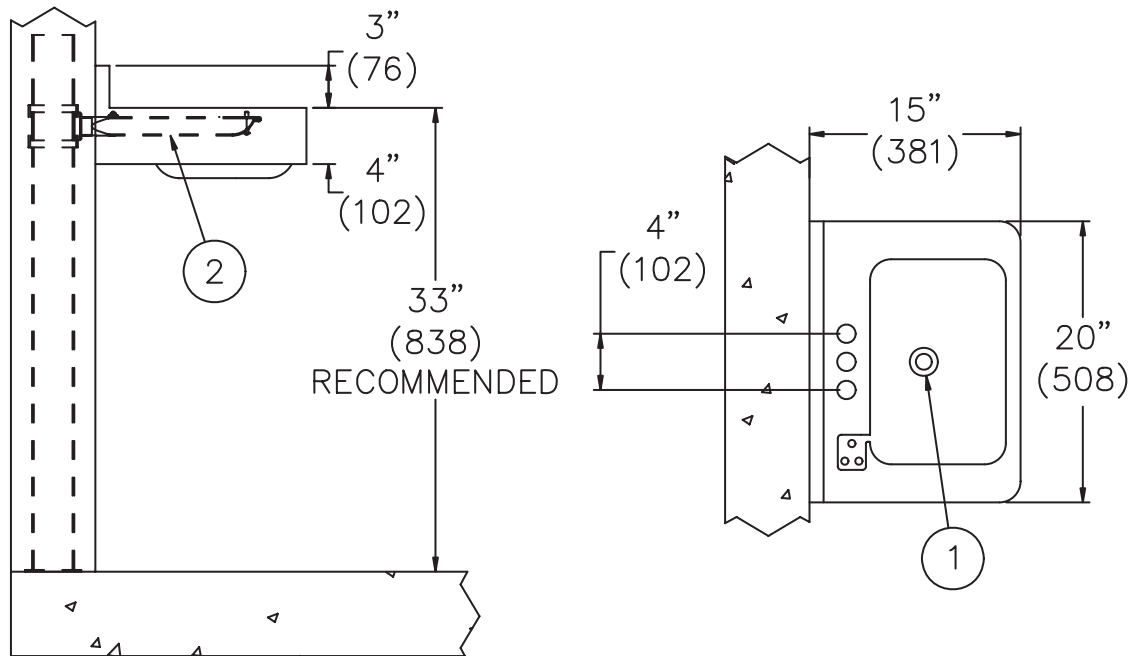

1950-LC-1-9

NOTES:

1. Lavatory Drain Hole.
2. Concealed Carrier (By Others).

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>