



## Dura-Ware® 2110 Series

Blowout Jet Toilet - On Floor



2110-W-2

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Blowout Jet Toilet - On Floor

**Fixture** is arranged to be installed on finished wall from the front side. Unit is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction. Exterior has a satin finish with an integral contoured seat. The inside of the toilet bowl also has a satin finish. Wall flange is reinforced for maximum strength.

**Toilet** is Blowout Jet type with elongated bowl manufactured to ANSI 112.19.2M requirements. Toilet has a 1-1/2" NPT flush valve connection and requires a minimum of 35 PSI flow pressure. Toilet uses a minimum water consumption of 1.6 gallons per flush. Trap has a minimum 3-1/2" seal, will pass a 2-1/8" ball and is fully enclosed. Toilet waste outlet is Gasketed Waste.

#### GUIDE SPECIFICATION

Provide and install Acorn Dura-Ware Blowout Jet Toilet (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish with an integral contoured toilet seat. Toilet shall be concealed blowout jet type with an elongated bowl and a self-draining flushing rim. Toilet shall meet ANSI 112.19.2M requirements, using a minimum water consumption of 1.6 gallons per flush. Toilet trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball and be fully enclosed. Toilet waste outlet shall be Gasketed Waste.



# Dura-Ware®: 2110 Blowout Jet Toilet - On Floor

### WALL THICKNESS AND TYPE (Must Specify)

Thickness \_\_\_\_\_ Type \_\_\_\_\_

### MODEL NUMBER AND OPTIONS SELECTION

#### BASE MODEL NUMBER

2110 Blowout Jet Toilet

#### SUPPLY (Must Specify)

- T Top (Exposed)  
 - W Wall (Concealed)

#### FIXTURE MOUNTING AND WASTE (Must Specify)

- 2 On-Floor, Wall Outlet

#### FLUSH VALVE GPF'S (Must Specify)

- 1.6 GPF  
 - 3.5 GPF


#### FLUSH VALVE OPTIONS (Must Specify)

- Flush Valve by Others  
 - EVSFV Master-Trol Flush Valve (N/A for Top Supply)  
 - FV Flush Valve (N/A for ADA)  
 - FVC Cover, Flush Valve (N/A for ADA)  
 - FVCH Cover, Hydraulic Flush Valve  
 - FVH Flush Valve, Hydraulic  
 - FVL Flush Valve, Lever Handle  
 - MVCFV Time-Trol Flush Valve (N/A for Top Supply)

#### Product Options

- ADA 18" Integral Seat Height  
 - BCN Blind Cap Nuts (2)  
 - BL Bedpan Lugs  
 - CN Cap Nuts (2)  
 - EG Enviro-Glaze: Specify Color: \_\_\_\_\_  
 Exterior Only (Not Inside Bowl)  
 Exterior & Inside Bowl  
 - FG 14 Gage Housing  
 - FT Flood-Trol (N/A for Top Supply)  
 - FTA Flood-Trol Auto-Reset (N/A for Top Supply)  
 - FVT Flush Valve Thru Wall Connection  
 - HPS High Polish Integral Seat  
 - HS Hinged Seat, Open Front Less Cover  
 - HSC Hinged Seat w/ Cover  
 - PE Plain End Waste Extended 3" Beyond Rear of Fixture  
 - PFS Punched for Seat by Others  
 - PH Paper Holder (Available Only with -FVC)  
 - TF Transformer, 120VAC to 24VAC  
 - TSC Toilet Shipping Cover  
 - VAC AcornVAC System  
 - WO3 3" O.D. Toilet Waste Outlet (3.5 GPF Only)

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

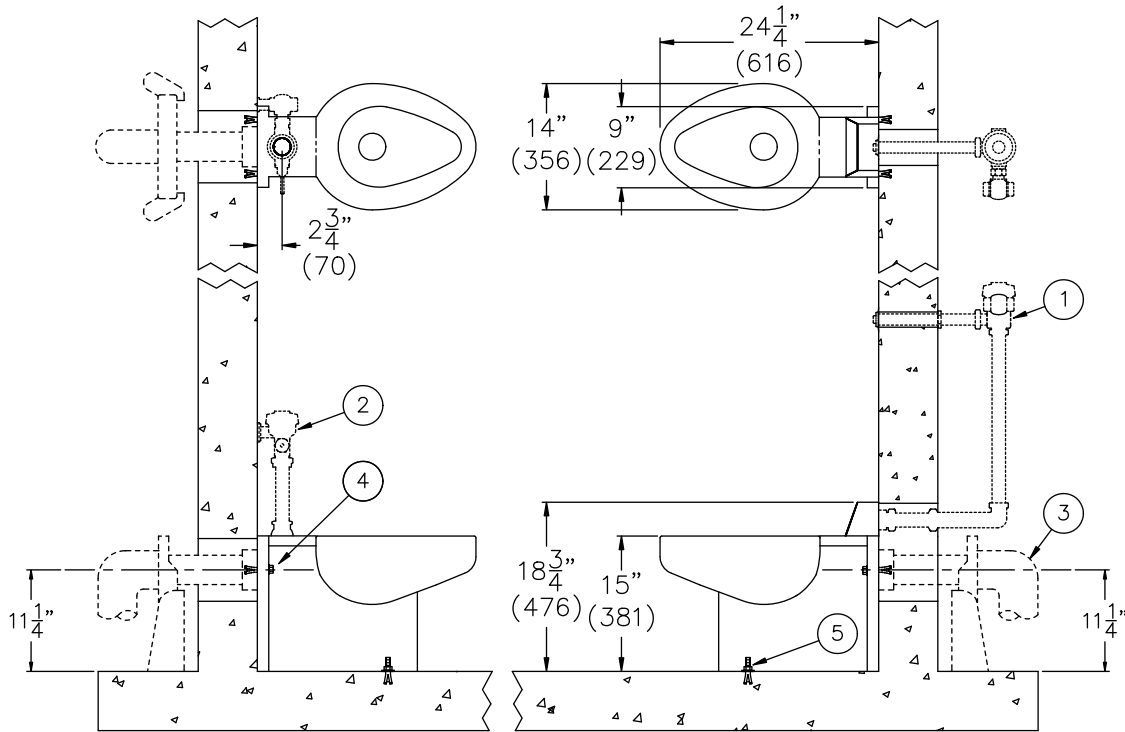

#### NOTES:

1. Optional -FV Flush Valve - Wall Supply.
2. Optional -FV Flush Valve - Top Supply.
3. Waste Fitting (By Others).
4. Wall Mounting Fasteners.
5. Floor Fasteners.

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company	
<b>Selection Summary</b> Model No. & Option _____ Quantity _____	<b>Approved for Manufacturing</b> Company _____ Title _____ Signature _____ Date _____