



Penal-Ware® 1400LVM Series Light/Ventilation Module



-LVM-ASV

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Lighting/ Ventilation Module

Lighting/Ventilation Module housing is fabricated from 14 gage, type 304 stainless steel and exposed surfaces shall have a satin finish. Module provides tamper-resistant task lighting (over mirror) and night lighting (front). Lights are remotely controlled from a central control. Outer lens is 1/4" tempered glass and inner lens is 1/4" clear acrylic. Both are secured by a stainless steel grid and are removable from the chase only. Both lights are mounted in one Unitized Electrical Module (UEM). All replaceable components are removable only from the chase. When required, an individual galvanized steel wall sleeve is available to mount fixture to the wall from the chase side. A tamper-resistant AC Duplex Outlet can be optionally furnished prewired inside the distribution box.

Ventilation Grille is 1/4" square punched holes in housing providing 20 sq. inches of free area. Factory installed plenum is ducted to the chase wall to the left, right, or both sides.

GUIDE SPECIFICATION

Lighting/Ventilation Module shall be fabricated from 14 gage, type 304 seamless welded stainless steel and exposed surfaces shall have a satin finish. Air Supply Vent shall be a perforated grille with factory installed ducting. Lights shall be constructed as Unitized Electrical Module (UEM), removable as a unit from the pipe chase. Outer lens shall be 1/4" thick tempered glass and inner lens shall be 1/4" thick clear acrylic protected with a perforated stainless steel grid. Lenses shall be replaceable from the chase. Parallel lamps shall be mounted in UL approved lamp holders. Lamps shall be remotely controlled from a central control.




Penal-Ware®: 1400LVM Lighting/ Ventilation Module

WALL THICKNESS AND TYPE (Must Specify)
 Thickness _____ Type: ___ Concrete ___ Block ___ Steel

- Product Options
- ACO AC Duplex Outlet
 - ALS Actuating Light
 Switch ___ Task Light ___ Light Switch
 - ASV Air Supply Vent ___ L ___ R
 - EG Enviro-Glaze, Specify Color: _____
 - SW Wall Sleeve

MODEL AND OPTIONS SELECTION
 -LVM Lighting/Ventilation Module

Please visit www.acorneng.com for most current specifications.

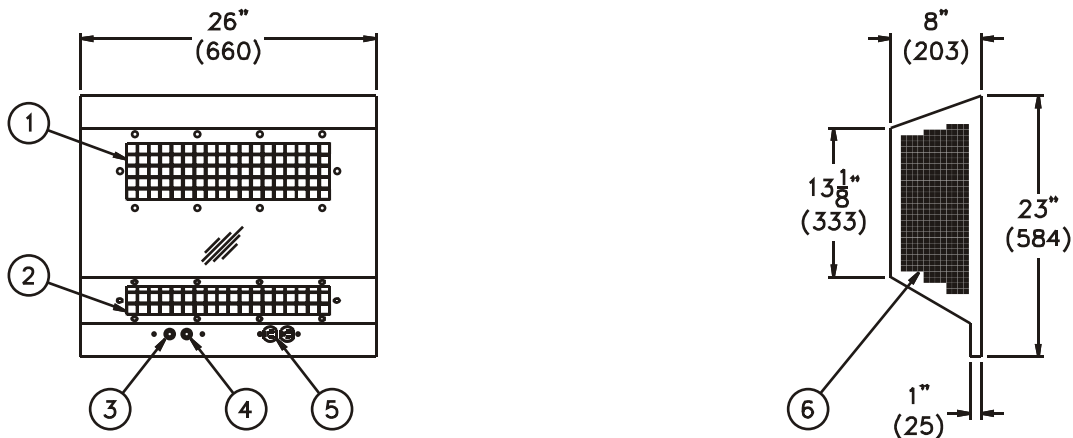

MODEL# -LVM-ACO-ALS-ASV

NOTES:

1. Night Light.
2. Task Light.
3. Optional -1 Task Light Pushbutton Switch.
4. Optional -2 Night Light Pushbutton Switch.
5. Optional -ACO AC Duplex Outlet.
6. Optional -ASV Air Supply Vent.

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2004 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>