



Penal-Ware® 1652FALRB Series

18" Lavatory with Rectangular Bowl - ADA Compliant - Front Access



1652FALRB-ADA-1-DMS-4

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

18" Lavatory with Rectangular Bowl - ADA Compliant - Front Access

Fixture is designed to be installed on a finished wall through a removable bottom secured with tamper-resistant screws. Features include an integral self-draining soap dish and mounting hardware. Wall anchors are by others. Optional Wall Sleeve is recommended to provide wall openings. Lavatory complies with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

Cabinet is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction with exposed surfaces polished to a satin finish. Cabinet interior is sound deadened with fire-resistant material.

Lavatory Rectangular Bowl is 14" x 12" x 5" deep and includes an integral fast drain. Standard P-trap waste outlet is 1-1/2" O.D. plain end and extends 3" beyond the rear of the fixture.

Optional Lavatory Valve is an optional Air-Control, pneumatically operated pushbutton valve using atmospheric air and includes 0.5 GPM flow control. Valve is metering non-hold open type and complies with the lead free requirements of NSF 61, Section 9-1997. Valve is intended to be housed within the cabinet or may be remotely located up to 10 feet from operating pushbutton. Pushbutton is vandal resistant and requires less than 5 lbs. pressure to actuate valve. Timing is adjustable from 5 to 60 seconds.

Suffix Option -DMB, Deck Mounted Bubbler optionally available, provides a drinking bubbler that meets ADA requirements for drinking fountains as described in Section 4.15. This option also includes a separate pushbutton and non-metering Air-Control valve.

GUIDE SPECIFICATION

Provide and install an Acorn Penal-Ware, 18" wide ADA Compliant Lavatory with Rectangular Bowl, Front Access (specify model number and options). Unit shall conform with ANSI, UFAS and ADA requirements for accessibility. Fixture shall be fabricated from 14 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Provide ADA compliant Air-Control pneumatically operated, metering, non-hold open pushbutton valve. Valve to comply with NSF61, Section 9-1997 lead free requirements. Cabinet bottom shall be removable and secured with tamper-resistant screws. Cabinet interior shall be sound deadened with fire-resistant



Penal-Ware® 1652FALRB: 18" Lavatory with Lavy Rectangular Bowl - ADA Compliant - Front Access

WALL THICKNESS AND TYPE (Must Specify)

Thickness _____ Type _____

MODEL AND OPTIONS SELECTION

BASE MODEL NUMBER

- 1652FALRB-ADA
18" Lavatory with Lavy Rectangular Bowl -
ADA Compliant - Front Access

FIXTURE MOUNTING AND WASTE (Must Specify)

- 1 Off-Floor, Wall Outlet

SPOUT SELECTION (Must Specify)

- DMS Deck Mounted Spout
- BPH Hemispherical Penal Bubbler

VALVE SELECTION (Must Specify)

- 3 Air-Control, Single Temperature
- 4 Air-Control, H & C
- 9 Punched for Valve by Others
(Specify Punching)
- EVS1 Electronic Valve System - Single Temp
- EVS2 Electronic Valve System - Hot & Cold
- MVC1 Time-Trol -Single Temp
- MVC1-BAT Time-Trol -Single Temp
Battery Operation
- MVC2 Time-Trol -Hot & Cold
- MVC2-BAT Time-Trol -Hot & Cold
Battery Operation



DECK PUNCHING (1-5/16" Diameter)

- H1 Single Hole Centered
- H24 Two Holes 4" Centerset
- H28 Two Holes 8" Centerset
(will eliminate soap depression)
- H34 Three Holes 4" Centerset
- H38 Three Holes 8" Centerset
(will eliminate soap depression)

Product Options

- CI Cycle Interrupt
- DMB Deck Mounted Bubbler
__ BP Penal Bubbler __ BC Code Bubbler
- DMS Deck Mounted Spout
- EG Enviro-Glaze, Specify Color: _____
- FMT Fixture Mounted Trim
- LWE Lavy Waste Extension
- MT Metal Template (Only One Required per Project)
- OF Lavatory Overflow
- PBH Hemispherical Pushbutton
- SW Wall Sleeve
- TB Toothbrush Holder __ Left __ Right
- TF Transformer
- TG 12 Gage Cabinet
- TH Towel Hook __Single__Double__Left__Right
- VAC Acorn-Vac System

Please visit www.acorneng.com
for most current specifications.

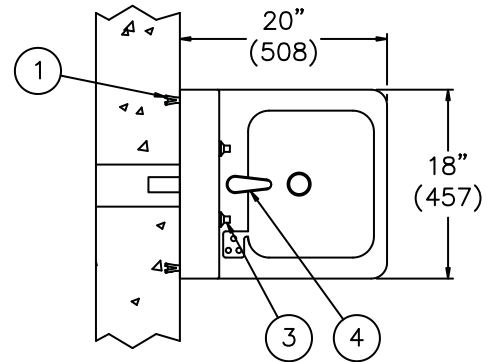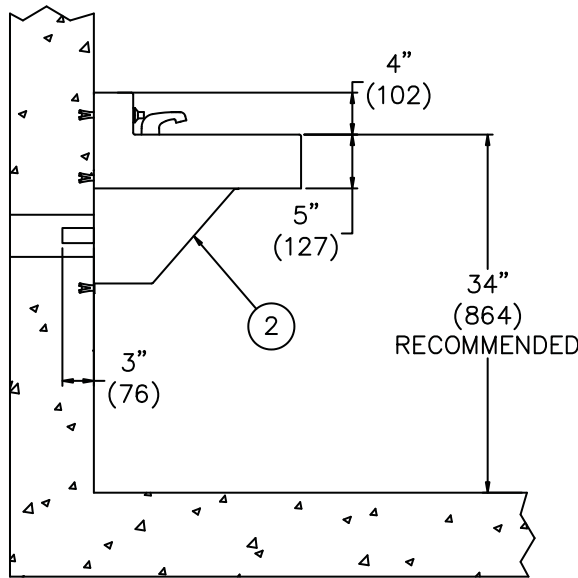

1652FALRB

NOTES:

- 1. Wall Mounting Anchors (By Others).
- 2. Removable Access Panel.
- 3. Lavy Valve Pushbuttons.
- 4. Deck Mounted Spout.

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>