



Penal-Ware® 1665 Series 15" Econo Lavatory



1665-1-BPH-4

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

15" Econo Lavatory

Fixture is arranged to be installed on finished wall and serviced from an accessible pipe chase. Optional Wall Sleeve or Metal Template is recommended for all installations for required wall openings. Fixture is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction. Cabinet interior is sound-deadened with fire-resistant material. There are no accessible voids or crevices where contraband can be concealed.

Lavatory Multi-Sided Bowl is 12-3/4" x 8-1/4" x 5" deep. Elbow waste outlet is 1-1/2" O.D. plain end and extends 3" minimum beyond the back of the wall.

Lavatory Valve is an optionally available Air-Control, pneumatically operated, pushbutton valve using atmospheric air and includes 0.5 GPM flow control. Valve is direct acting, non-metering type, optionally available as metering with non-hold open feature and complies with the lead free requirements of NSF 61, Section 9-1997. Valve can be remotely located up to 10 feet from operating pushbutton. Pushbutton is vandal resistant and requires less than 5 lbs. pressure to actuate valve. Timing is adjustable from 5 to 60 seconds on metering valves.

Regularly Furnished items include a fast drain, integral raised soap ribs, and mounting hardware for walls up to 8" thick to anchor thru fixture slots.

GUIDE SPECIFICATIONS

Provide and install Acorn Penal-Ware® 15" wide Econo Lavatory (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded. Counter top shall have raised soap ribs. Provide Air-Control pneumatically operated pushbutton valve. Valve to conform with NSF61, Section 9, 1997 lead free requirements. Cabinet bottom shall be enclosed and have no accessible voids or crevices where contraband can be concealed. Cabinet interior is sound-deadened with fire-resistant material. Fixture shall withstand loadings of 1,500 pounds without permanent damage. Fixture shall be furnished with necessary fasteners for proper installation.



Penal-Ware®: 1665 15" Econo Lavatory

WALL THICKNESS AND TYPE (Must Specify)

Thickness _____ Type: ___ Concrete ___ Block ___ Steel

MODEL AND OPTIONS SELECTION:

BASE MODEL NUMBER

1665 15" Econo Lavatory

FIXTURE MOUNTING AND WASTE (Must Specify)

-1 Off-Floor, Wall Outlet

BUBBLER SELECTION (Must Specify)

-BPH Hemispherical Penal Bubblers

VALVE SELECTION (Must Specify)

-3 Air-Control, Single Temperature


-4 Air-Control, H & C

-9 Punched for Valve by Others

Product Options

- EG Enviro-Glaze, Specify Color: _____
- LW1 Lavy Thru-Wall Extension with P-Trap
- M Metering
- MA Manifold Valve ___2 ___3 ___4
- MH Metering, Hot Side Only
- MT Metal Template (Only 1 Required Per Project)
- PBH Hemispherical Pushbutton
- SW Wall Sleeve
- TB Toothbrush Holder ___Left ___Right
- TH Towel Hook ___Single ___Double ___Left ___Right
- VAC Acorn-Vac System

Please visit www.acorneng.com for most current specifications.

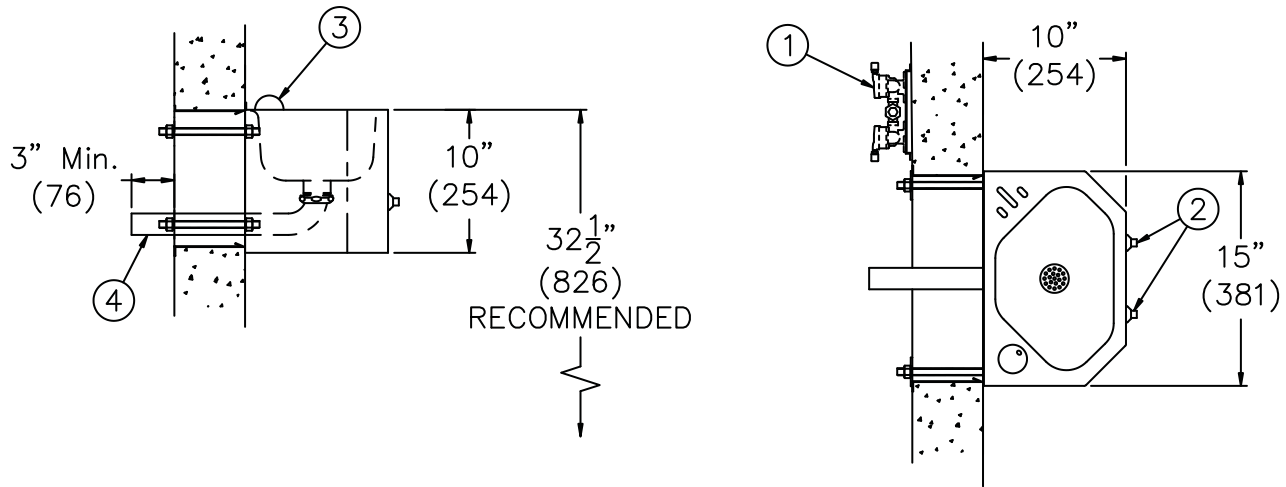

1665-1-BPH-4

NOTES:

1. -4 Air-Control Valve.
2. Lavy Valve Pushbuttons.
3. -BPH Hemispherical Penal Bubblers.
4. 1-1/2" O.D. Plain End Waste Outlet. Length Beyond Rear of Unit is Wall Thickness Plus 3" Minimum.

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>