



1741 Series

Penal-Pak - Wall Shower



1741-4-RD

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Penal-Pak - Wall Shower

Shower is arranged to be installed on finished wall and serviced from an accessible pipe chase. Back of Shower is provided with anchor tappings. Optional Wall Sleeve or Metal Template is recommended for all installations for required wall openings. Fixture is fabricated from 14 gage, type 304 stainless steel with a satin finish.

Shower Head. The Acorn Shower Head is vandal-resistant. The nozzle is threaded into the body and then locked into place by a set screw. The spray pattern can only be changed by use of an allen wrench inserted through the nozzle. Shower head is chrome-plated brass.

Valve is an Air-Control pneumatically operated, pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is metering type with non-hold open feature. Timing is adjustable from 5 to 60 seconds. Valve includes a 2.5 GPM flow control and can be remotely located up to 10 feet from the operating pushbutton.

Regularly furnished items include an Air-Control metering valve, a Shower Head and hardware for walls up to 8" thick.

GUIDE SPECIFICATION

Provide and install Acorn Penal-Pak - Wall Shower (specify model number and options). Shower panel shall be fabricated from 14 gage, type 304 stainless steel and shall have a satin finish. Trim shall be stainless steel or chrome-plated brass. Shower valve shall be Air-Control, metering, non-hold open type. Fixture shall be furnished with necessary fasteners for proper installation.



Penal-Ware®: 1741 Penal-Pak - Wall Shower

WALL THICKNESS AND TYPE (Must Specify)

Thickness _____ Type: ___ Concrete ___ Block ___ Steel

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

-1741 Penal-Pak Wall Shower

VALVE SELECTION (Must Specify)


- 3 Air-Control, Single Temperature
- 4 Air-Control, H & C
- 9 Punched for Valve by Others (Specify Punching)
- EVS1 Electronic Valve System - Single Temp
- EVS2 Electronic Valve System - Hot & Cold
- MVC1 Time-Trol - Single Temp
- MVC2 Time-Trol - Hot & Cold

Product Options

- CSH Conical Shower Head
- D Soap Dish
- EG Enviro-Glaze, Specify Color: _____
- F Flow Control 2.0 GPM
- MA Manifolded Valve ___ 2
- MT Metal Template (Only 1 Required Per Project)
- PBH Hemispherical Pushbutton
- RD Recessed Soap Dish
- SSV Space Saver Showerhead 20 Degree Discharge
- SW Wall Sleeve

Please visit www.acorneng.com for most current specifications.


MODEL NO.	"A"
Single Temp Valve	8" (203)
Hot and Cold Valve	10" (254)

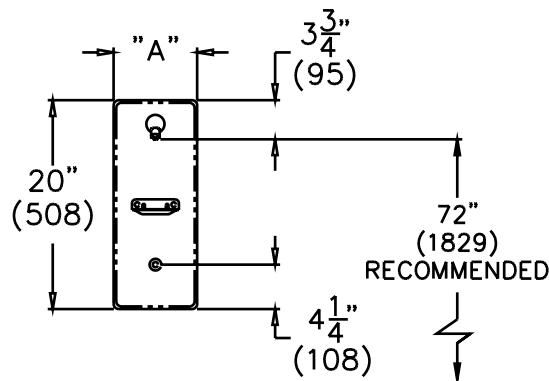

1741-3-D

NOTES:

1. Optional -3 Air-Control Valve.
2. Penal Shower Head.
3. Optional -D Surface Mounted Soap Dish.

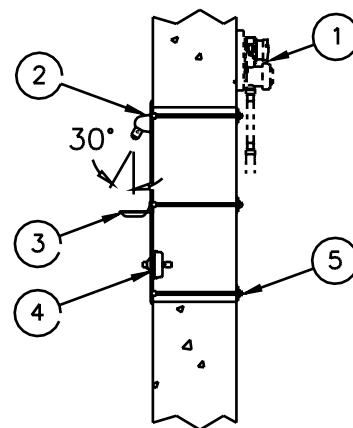

4. Penal Pushbutton.
5. Wall Mounting Hardware.

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2003 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>