



## 1743 Series

Penal - Wall-Mounted Shower



1743-3-RD

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Penal - Wall-Mounted Shower

**Shower** components are arranged to be installed on finished wall and serviced from an accessible pipe chase. Backs are provided with anchor tappings, anchor plates and supply connections. Optional Wall Sleeve or Metal Template is recommended for all installations to provide required wall openings. Pushbutton panel is 14 gage, type 304 stainless steel with exterior polished to a satin finish.

**Shower Head.** The Acorn Shower Head is vandal-resistant. It projects only 2" from the wall and is tapered to prevent its use as a suicide device. The nozzle portion is threaded into the body and locked into place. The spray pattern can only be changed by the use of a special wrench inserted through the nozzle orifice. Shower head and pushbutton escutcheon are chrome-plated brass.

**Valve** is an Air-Control pneumatically operated, pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is metering type with non-hold open feature. Timing is adjustable from 5 to 60 seconds. Valve includes a 2.5 GPM flow control and can be remotely located up to 10 feet from the operating pushbutton.

**Regularly Furnished** items include an Air-Control metering valve, a shower head, and rust-resistant mounting hardware for walls up to 8" thick.

#### GUIDE SPECIFICATION

Provide and install Acorn Penal - Wall-Mounted Shower (specify model number and options). Shower components shall be provided with anchor tappings, anchor plates, and supply connections. Pushbutton panel shall be 14 gage, type 304 stainless steel polished to a satin finish. All other trim shall be chrome plated. Shower valve shall be Air-Control, metering, non-hold open type. Components shall be furnished with all necessary fasteners and plate for proper installation.



# Penal-Ware®: 1743 Penal - Wall-Mounted Shower

### WALL THICKNESS AND TYPE (Must Specify)

Thickness \_\_\_\_\_ Type: \_\_\_ Concrete \_\_\_ Block \_\_\_ Steel

### MODEL NUMBER AND OPTIONS SELECTION

#### BASE MODEL NUMBER

-1743 Penal Wall-Mounted Shower



#### VALVE SELECTION (Must Specify)

- 3 Air-Control, Single Temperature
- 4 Air-Control, H & C
- EVS1 Electronic Valve System - Single Temp
- EVS2 Electronic Valve System - Hot & Cold
- MVC1 Time-Trol - Single Temp
- MVC2 Time-Trol - Hot & Cold

#### Product Options

- CSH Conical Shower Head
- D Soap Dish
- EG Enviro-Glaze, Specify Color: \_\_\_\_\_
- F Flow Control 2.0 GPM
- MA Manifolded Valve \_\_\_ 2
- MT Metal Template (Only 1 Required Per Project)
- PBH Hemispherical Pushbutton
- RD Recessed Soap Dish
- SW Wall Sleeve

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

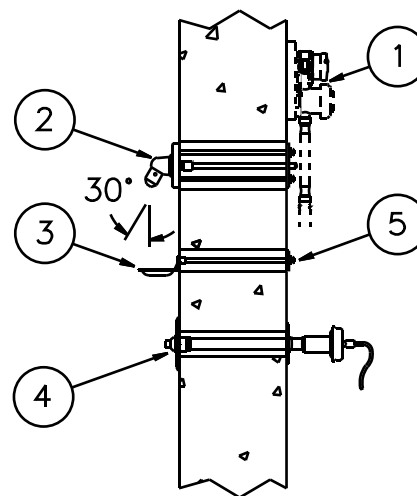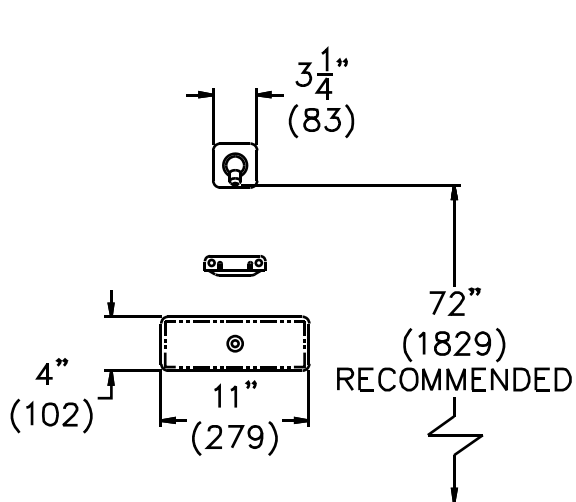

1743-3-D

#### NOTES:

1. Optional -3 Air-Control Valve.
2. Flanged Penal Shower Head.
3. Optional -D Surface Mounted Soap Dish.
4. Penal Pushbutton.
5. Wall Mounting Hardware.

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2004 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>