



Shower-Ware® 500 Series Zenith Built-In Showers



515-GX-A

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Zenith Built-In Showers

Shower consists of a control valve and a shower head. They are particularly suited for individual applications such as coach showers. Zenith valve and shower head combinations feature the utmost in service desirability.

Piping between valve and shower head is furnished by others for -1 Flo-Cloz H & C, -3 Safti-Therm Temperature Balancing, -5 Flo-Cloz Single Temperature, -7 Meter-Matic Single Temperature Metering, and -9 Without Valves

Control Valve body is heavy cast bronze and all wearing parts are contained in a replaceable cartridge. Exposed surfaces are either polished stainless steel or triple chrome-plated. All exposed fasteners are tamper-resistant.

Shower Head is an Acorn Logan Wizard Shower Head with square mounting flange and is regularly furnished front drilled with stainless steel tamper-resistant screws. Connection to the water supply is made via an exclusive O-ring adapter, for back inlet shower heads.

GUIDE SPECIFICATION

Provide and install Acorn Zenith Built-In Showers (specify model number and options). Valve body and shower head shall be solid brass with all exposed parts triple chrome-plated or polished stainless steel. Shower shall be provided with the following optional equipment: (example -F Flow Control, -G Individual Stops).



Shower-Ware®: 500 Zenith Built-In Showers

MODEL NUMBER AND OPTIONS SELECTION

SERIES (Must Specify)

-5 - Zenith

SUPPLY (Must Specify)

- 1 - Back Supply
 -3 - Top or Bottom Supply

VALVE (Must Specify)

- 0 - Electronic Valves, Single Temp Metering
 -1 - Flo-Cloz, H & C
 -2 - Safti-Trol, H & C Pressure Balancing
 -3 - Safti-Therm, H & C Temperature Balancing
 -4 - Single-Trol, H & C Mixing
 -5 - Flo-Cloz, Single Temperature
 -6 - Air-Control, Single Temperature Metering
 -7 - Meter-Matic, Single Temperature Metering
 -9 - Without Valves (Remote Control)

ELECTRONIC VALVE SELECTION


(Refer to Valves Section for Submittal Data)

- EVS1 Electronic Valve System - Single Temp
 -MVC1 Time-Trol - Single Temp

Product Options

- A Anchor Plate
 -B Back Plate
 -BA Bent Arm Head
 -BAT Battery Operated (-MVC1)
 -CSH Conical Shower Head
 -D Soap Dish
 -DIV Diverter Valve with Hand Shower & 60" Stainless Steel Hose
 -DIV-FH Diverter Valve with Fixed Head in Lieu of Hand Shower (Shower options specified apply to both shower heads.)
 -F Flow Control 2.0 GPM
 -FX Hand Shower With 60" Stainless Steel Hose
 -G Individual Stops
 -GX Individual Check stops
 -H Hand Volume Control
 -K Allen Key Volume Control
 -LVR Lever Handle (-2, -4 and -5 Valves Only)
 -LRD Less Recessed Soap Dish
 -MS Modular Privacy Compartments (See Diana Privacy Tab)
 -MSH Multi-Stream Shower Head
 -MV Metering Valve in Riser (Air-Control)
 -P Penal Shower Head
 -PBH Hemispherical Pushbutton
 -PO Piston-Operated Safti-Trol Valve
 -RD Recessed Soap Dish
 -SB 24" Slide Bar (For -FX Hand Shower)
 -WS Without Shower Head
 -Y Universal Ball Joint
 -YY Lockable Universal Ball Joint
 -Z Up-Down Ball Joint
 -ZZ Lockable Up-Down Ball Joint

Please visit www.acorneng.com for most current specifications.

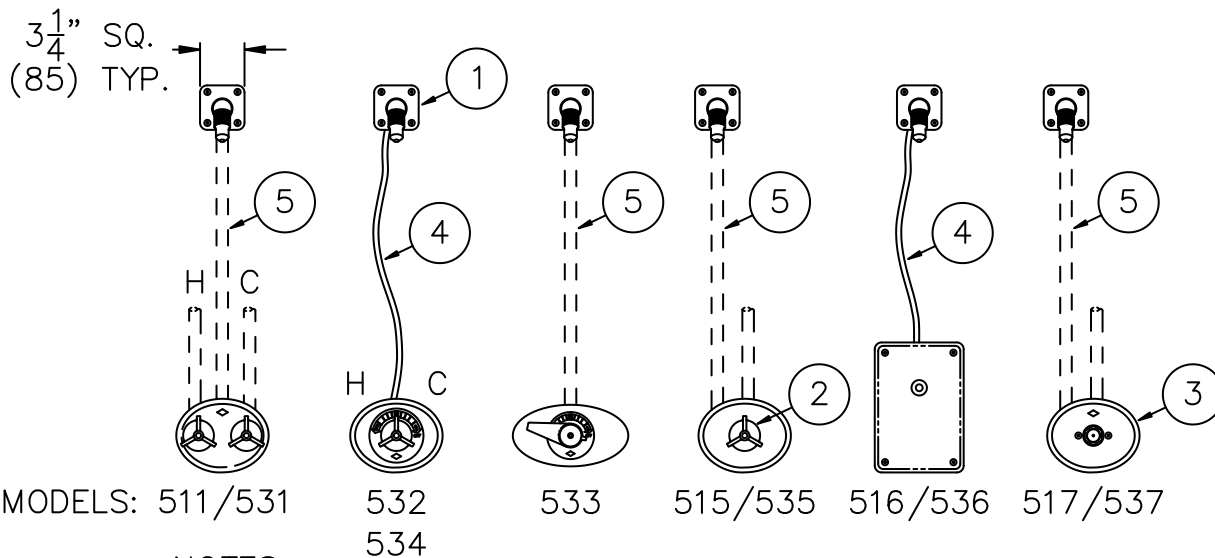

NOTES:

1. Flanged Shower Head.
2. Valve Control Handle.
3. Valve Escutcheon.
4. 3/8" Low Density Tubing.
5. 1/2" NCT Riser By Others.

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>