



## Shower-Ware® 600 Series

Classic Column Showers Two to Six Station Models



645-B11-RD

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Classic Column Showers Two to Six Station Models

**Column Shower** is heavy gage, type 304 stainless steel with satin finish. Column showers are completely pre-piped to the valve, shower head, and optional soap system. All Column Showers are hydrostatically tested to 150 PSI.

**Shower Heads** are solid brass, triple chrome-plated. The Acorn Logan Wizard Shower Head design provides self-cleaning with every use, and has an adjustable spray pattern from a coarse stream to a fine mist.

**Bronze Manifolds** and valve bodies are used for long life and maximum corrosion protection in all column showers. Fittings for connecting to 1" NCT inlets are furnished by others.

**Control Valve** type is indicated by selected Classic model number. All valves have replaceable cartridges which contain all wearing parts and are serviced from the face of the shower for easy maintenance. Valve is tamper-resistant with an easy to close mechanism and low leverage handle to protect the operating parts from excessive torque.

**Soap Systems** are optional.

**Drain Base** is cast iron with a rust preventative coating, and provides a secure mounting for the column.

**Fasteners.** Acorn furnishes all exposed tamper-resistant fasteners necessary to complete the on-site shower assembly installation; however, supply cover ceiling fasteners are not furnished.

#### GUIDE SPECIFICATION

Provide and install Acorn Classic Column Showers (specify model number and options). Column shall be 14 gage, type 304 stainless steel with satin finish. Column shall be factory pre-piped and hydrostatically tested to 150 PSI. Drain base shall be heavy cast iron with a rust preventative coating, and shall have a Dome Grate with polished chrome-plated finish. Shower head discharge height shall be (specify). Shower shall be provided with the following optional equipment: (example -G Individual Stops). Installation shall be made in accordance with manufacturer's recommendations and details.

# Shower-Ware®: 600 Classic Column Showers Two to Six Station Models



## Shower Head Discharge Height (Not Part of Model Number)

\_\_ 6'-0" \_\_ 5'-6" \_\_ 5'-0" \_\_ Other (Specify) \_\_\_\_\_

## MODEL NUMBER AND OPTIONS SELECTION

### SERIES (Must Specify)

6 - Classic

### NUMBER OF STATIONS (Must Specify)

\_\_ 2 \_\_ 3 \_\_ 4 \_\_ 5 \_\_ 6

### VALVE (Must Specify)

- 0 - Electronic Valves, Single-Temp Metering
- 1 - Flo-Cloz, H & C
- 2 - Safti-Trol, H & C Pressure Balancing
- 3 - Safti-Therm, H & C Temperature Balancing
- 4 - Single-Trol, H & C Mixing
- 5 - Flo-Cloz, Single Temperature
- 6 - Air-Control, Single Temperature Metering
- 7 - Meter-Matic, Single Temperature Metering
- 9 - Without Valves (Remote Control)

### ELECTRONIC VALVE SELECTION

#### (Refer to Valves Section for Submittal Data)

- EVS1 Electronic Valve System - Single Temp
- MVC1 Time-Trol - Single Temp

### SUPPLY AND DRAIN TYPE

(See Model Numbers and Options)

#### Top Supply:

- LDT Less Drain Build Top Supply
- T11  T15


#### Bottom Supply:

- LDB Less Drain Build Bottom Supply
- B11  B15

### Product Options

- BAT Battery Operated (-MVC1)
- BDA Bradley Drain Adapter
- BS Built-in Liquid Soap System
- CA Ceiling Anchor Plate for Supply Cover
- CF Adjustable Column Flange
- CI Cycle Interrupt
- CSH Conical Showerhead
- D Soap Dish
- DS Diana Circular Privacy (See Diana Privacy Tab)
- EG Enviro-Glaze Color, Specify \_\_\_\_\_
- F Flow Control 2.0 GPM
- FO 4" No-Hub Waste Outlet (B11, T11 drains)
- FS Foot Shower at One Station
- FX Hand Shower With 60" Stainless Steel Hose
- G Individual Stops
- GG Unit Shutoff Valve
- GX Individual Check stops
- H Hand Volume Control
- IC 3" Inside Caulk Waste
- K Allen Key Volume Control
- LVR Lever Handle (-2, -4 and -5 Valves Only)
- MS Modular Privacy Compartments (See Diana Privacy Tab)
- MSH Multi-Stream Shower Head
- MV Metering Valve in Riser (Air-Control)
- P Penal Shower Head
- PBH Hemispherical Pushbutton
- PO Piston-Operated Safti-Trol Valve
- RD Recessed Soap Dish
- SC Supply Cover, Ceiling Height \_\_\_\_\_
- TC Thermostatic Controller  
(Not available with B15 drain)
- Y Universal Ball Joint
- YY Lockable Universal Ball Joint
- Z Up-Down Ball Joint
- ZZ Lockable Up-Down Ball Joint

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

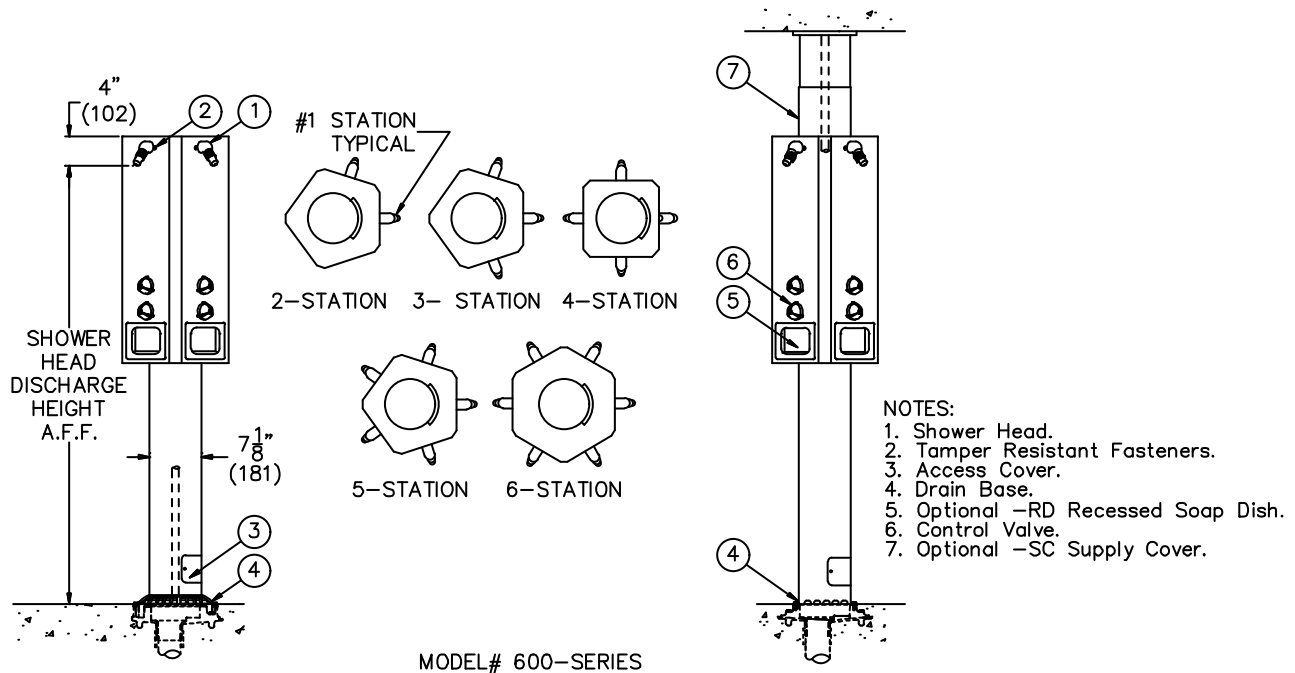

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>