



Wash-Ware® 3350 Series Retro-Pak - Replacement



Fixture May Show Some Available Options

Retro-Pak - Replacement

The Acorn Retro-Pak has been designed to completely replace the operating mechanism on Bradley FC model Washfountains.

BRADLEY MODELS: AFC, BFC, HFC, OFC, CFC, CFC-B, CFC-H, CFC-O, KFC, KFC-B, KFC-H, KFC-O.*

The Acorn Retro-Pak replaces the sprayhead, soap dispensing system and valve assembly. The Retro-Pak sprayhead and stanchion assembly is fabricated entirely of type 304 stainless steel with a satin finish. Acorn's sprayhead is designed to contain the pushbuttons, individual spray nozzles and optional soap system. The sprayhead assembly is mounted to the existing bowl, using tie rods and supporting castings. Gasket for applicable bowl material is included.

The Valve Assembly, including the single handle pressure balancing mixing valve and the individual, non-hold open metering valves are arranged to be located within the existing pedestal. A mounting bracket is included to accommodate wall or floor mounting.

Valves are Air-Control pneumatically operated, pushbutton type using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is metering type with non-hold open feature. Timing is adjustable from 5 to 60 seconds.

Regularly furnished items include sprayhead, sprayhead stanchion, upper and lower support castings, tie rods, gasket, pressure balancing mixing valve, strainer checkstops and Air-Control metering valves (one per washing station).

GUIDE SPECIFICATION

Provide and install Acorn Retro-Pak (specify model number and options) with individual Air-Control non-hold open metering valves and spray nozzles. Sprayhead and stanchion to be type 304 stainless steel with a satin finish.

* *These models are registered trademarks of Bradley Corporation.*



Wash-Ware®: 3350 Retro-Pak - Replacement

REPLACEMENT WASHFOUNTAIN DESCRIPTION (Must Specify)

Bowl Material _ Terrazzo _ Stainless Steel __ Bradstone
 Configurations __ Round __ Semi-Circ. __ Corner
 Number of Users __ 8 __ 5* __ 4 __ 3 __ 2
 Supplies __ From Above __ From Below
 Vent __ Centrally Rising __ Off Drain

*Acorn supplies 6 individual washing stations for Bradley's 5 user model.

Product Options

- BAT Battery Operated (-SO)
- CS Compact Sprayhead (9" diameter x 4" high)
- DP Metering Powder Soap Dispenser
- DV Liquid / Lotion Soap Dispenser
- MXT Thermostatic Mixing Valve
- PDM Metering Liquid Soap Dispenser
- SC Supply Vent Cover Ceiling Height: _____
- ST Single Temperature Supply
- WW Non-Sectional Control


MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

-3350 Retro-Pak (For Replacing Bradley FC Models)

OPERATION (Must Specify)

- H Hand Operation
- SO Sensor Operation

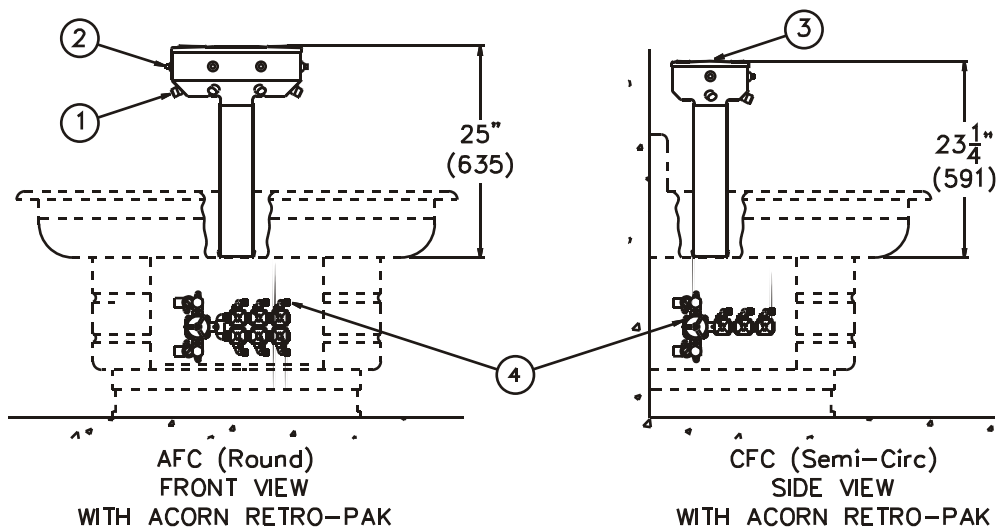

NOTES:

1. Spray Nozzles.
2. Valve Pushbuttons.
3. Optional -CS Compact Sprayhead (required on semi-circular terrazzo models).

MODEL # 3350-H
Series

4. Valve Assembly.

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2004 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>