




Option -H

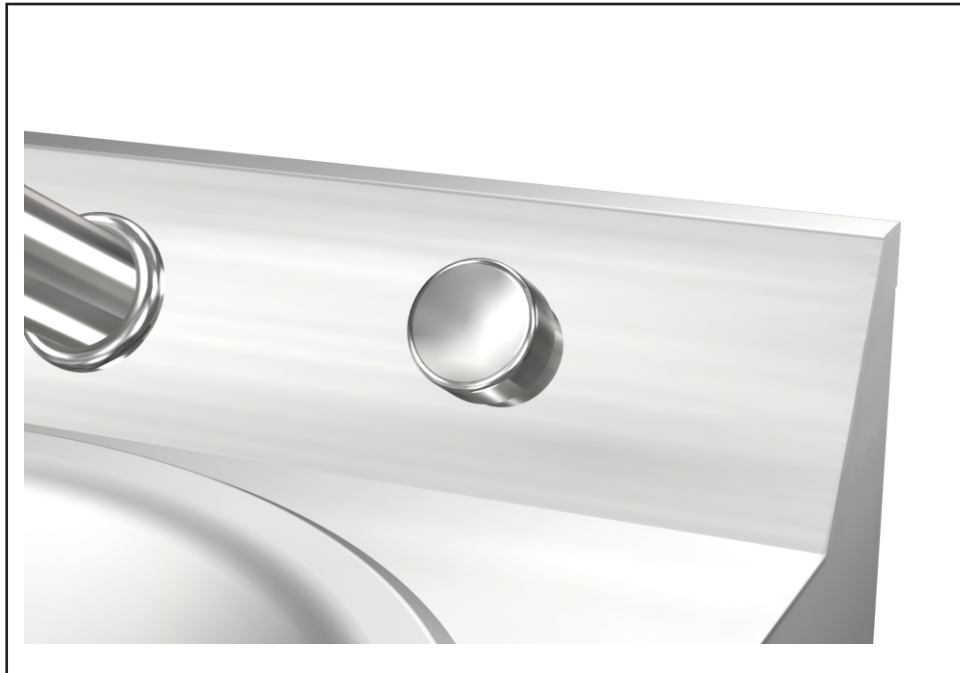

Hand Operation -

This option includes an individual pushbutton control for the Air-Control Metering valve and is provided standard with a Temperature/Pressure balancing mixing valve. Water flow metering can be field set for range from 5 to 60 seconds. Pushbutton requires less than 5 pounds of pressure to activate the valve.

See model submittals for pushbutton location.

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

