




Option -MVC1

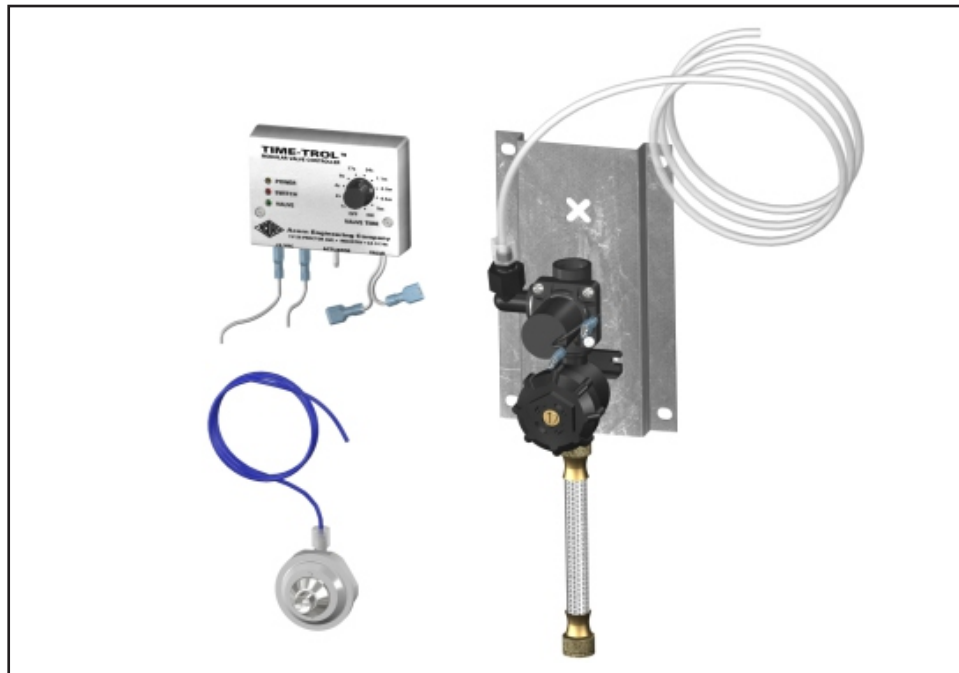

Time-Trol Single Temperature-

This single temperature valve includes the Time-Trol Valve Controller. The 24V solenoid, soft closing valve features pushbutton activation and is provided with a stainless steel strainer and integral checkstop. Valve timing/lockout cycle shall have 10 preset intervals ranging from 1 second to 9 minutes, easily adjustable with a knob. Valve conforms with the lead-free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements. Refer to individual MVC catalog sheets in Valves section for technical data.

Optional -BRS Brass Valve Body & checkstop assembly also available, provides the lead free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements.

Valve Specifications:

Minimum/Maximum Pressure: 30/100 PSI
Maximum Water Pressure: 130° F / 54° C

Please visit www.acorneng.com for most current specifications.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

