




Option -TF

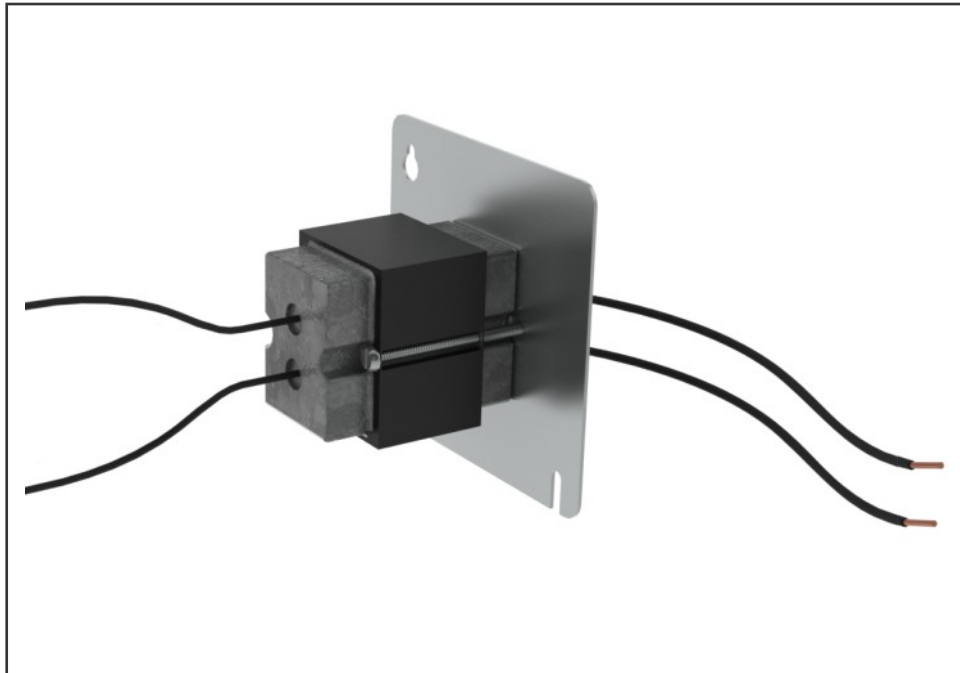

Transformer for Time-Trol Valves -

This option provides a transformer mounted on a plate and intended to be hardwired to an installer provided 4" x 4" J-box with electrical service. Can be used with low voltage (24VAC) solenoids to include EVS Master-Trol, MVC Time-Trol and -SO Sensor Operation control. Transformer is provided with each EVS controller and -SO Sensor Operated fixture.

120VAC, 60Hz, 3A minimum service required.

Provides 24VAC, 50VA.

Serves quantity 1 to 9 (24VAC) Solenoids

Please visit www.acorneng.com for most current specifications.

 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

