



## Penal-Ware® 1640FA Series Service Sink - Front Access



1640-FA-2-SE-4

1640-FA-1-SE-4

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Service Sink - Front Access

**Fixture** is arranged to be installed on finished wall and serviced from the fixture side through removable access panels. Optional Wall Sleeve is recommended for all installations for required wall openings.

**Fixture** is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction with a satin finish. Access openings are provided with vandal-resistant fasteners. When optional soap dish is specified, backsplash is structurally reinforced at attaching points. Cabinet interior is sound-deadened with fire-resistant material.

**Model 1640** has a 19" x 16" x 10" deep bowl, and Model 1642 has a 22" x 16" x 10" deep bowl. Standard waste is a 2" removable P-trap.

**Optional Valve** is an Air-Control pneumatically operated, pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is direct acting, non-metering type and is optionally available as metering with non-hold open feature. Metering valve timing is adjustable from 5 to 60 seconds. Valve includes a 2.5 GPM flow control and can be remotely located up to 10 feet from the operating pushbutton.

**Regularly Furnished Trim** includes a 2" removable P-trap waste, integral grid strainer, and mounting hardware.

### GUIDE SPECIFICATION

Provide and install Acorn Penal-Ware Front Access Service Sink (specify model number and options). Fixture shall be fabricated from 14 gage, type 304 stainless steel including all reinforcing. All welds shall be ground smooth. Exterior shall have a satin finish. Sink shall be double wall construction with integral cabinet and backsplash. Provide removable access panels. Provide Air-Control pneumatically operated pushbutton valve. Fixture shall be furnished with necessary fasteners for proper installation.



# Penal-Ware®: 1640FA Service Sink - Front Access

### WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

### MODEL AND OPTIONS SELECTION:

#### BASE MODEL NUMBER

- 1640-FA Service Sink, 21" x 21" - Front Access
- 1642-FA Service Sink, 24" x 21" - Front Access

### FIXTURE MOUNTING AND WASTE (Must Specify)

- 1 Off-Floor, Wall Outlet
- 2 On-Floor, Wall Outlet

### SPOUT SELECTION (Must Specify)

- SE Spout with Plain End
- SH Spout with Hose End

### VALVE SELECTION (Must Specify)

#### Air-Control (Pneumatic)

- 03 Single Temp, Non-Metering
- 03-M Single Temp, Metering
- 04 Hot & Cold, Non-Metering
- 04-M Hot & Cold, Metering
- 04-MH Hot & Cold, Metering Hot Side Only

#### Master-Trol® (Electronic)

- EVS1 Single Temp
- EVS2 Hot & Cold
- EVSP1 Single Temp, Piezo Button
- EVSP2 Hot & Cold, Piezo Buttons

#### Master-Trol® PLUS (Electronic)

- MTP1 Single Temp
- MTP2 Hot & Cold
- MTPP1 Single Temp, Piezo Button
- MTPP2 Hot & Cold, Piezo Buttons

### VALVE SELECTION continued (Must Specify)

#### Time-Trol® (Electronic)

- MVC1 Single Temp
- MVC1-BAT Single Temp Battery Powered (Batteries Not Included)
- MVC2 Hot & Cold
- MVC2-BAT Hot & Cold Battery Powered (Batteries Not Included)

#### Valve By Others

- 9 Punched for Valve by Others

#### VALVE OPTIONS

- BRS Brass Body Valve
- CI Cycle Interrupt for Time-Trol® Valves
- PBH Hemispherical Pushbutton
- TF Transformer, 120VAC to 24VAC (-MVC option only)


#### CABINET OPTIONS

- D Soap Dish
- FMT Fixture Mounted Trim
- IS Integral Shelf
- TG 12 Gage Cabinet
- TH Towel Hook  Left  Right

#### PRODUCT OPTIONS

- EG Enviro-Glaze, Specify Color: \_\_\_\_\_
- MT Metal Template (Only 1 Required Per Project)
- SW Wall Sleeve
- VAC Acorn-Vac System
- VB Vacuum Breaker (For use with Hose End Spout Only)

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

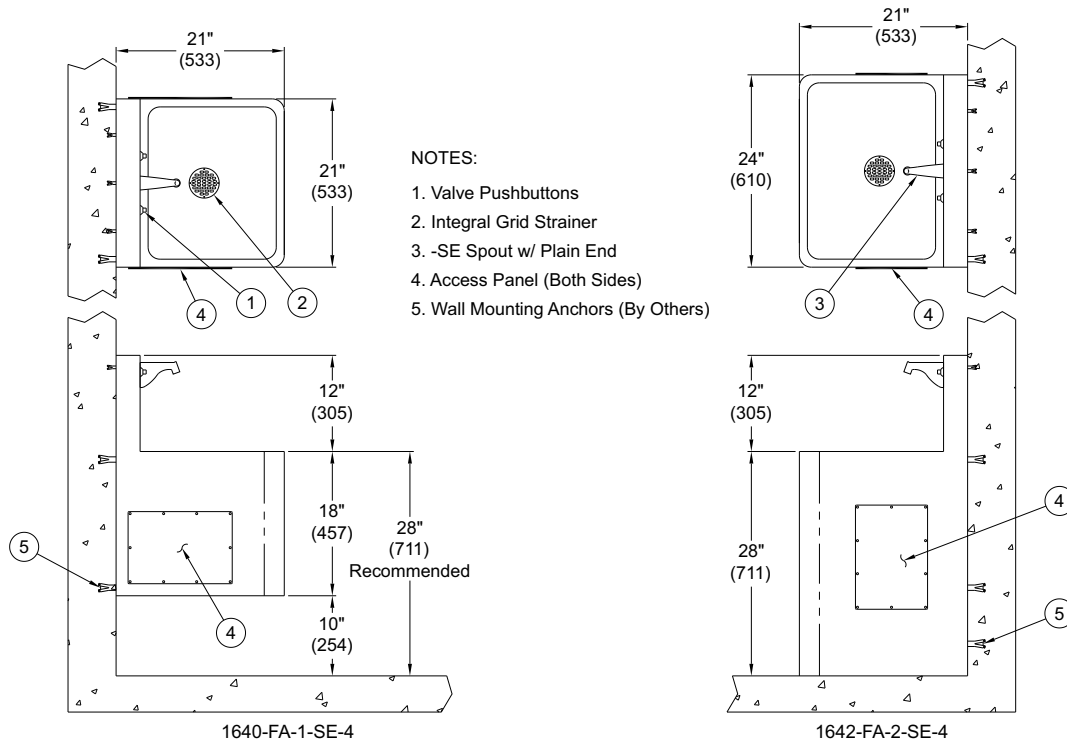

- NOTES:
1. Valve Pushbuttons
  2. Integral Grid Strainer
  3. -SE Spout w/ Plain End
  4. Access Panel (Both Sides)
  5. Wall Mounting Anchors (By Others)

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions.                  Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>