



Please visit *www.acorneng.com* for most current specifications.

18" Lavatory with Rectangular Bowl - ADA / CBC Compliant - Front Access

Fixture is designed to be installed on a finished wall through a removable bottom secured with tamper-resistant screws. Features include an integral self-draining soap dish and mounting hardware. Wall anchors are by others. Optional Wall Sleeve is recommended to provide wall openings. Lavatory complies with ANSI, UFAS, CBC and ADA 2010 requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

Cabinet is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction with exposed surfaces polished to a satin finish. Cabinet interior is sound deadened with fire-resistant material.

Lavatory Rectangular Bowl is $14" \times 12" \times 4-1/2"$ deep and includes an integral fast drain. Standard P-trap waste outlet is 1-1/2" O.D. plain end and extends 3" beyond the rear of the fixture.

Optional Lavatory Valve is an pneumatically operated, pushbutton Air-Control valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is metering, non-hold open type. Valve timing is adjustable from 5 to 60 seconds. Valve includes a 0.5 GPM flow control and can be remotely located up to 10 feet from the operating pushbutton. Valve and Bubbler conforms with lead free requirements of NSF61, Section 9 and CHSC 116875.

Suffix Option -DMB, Deck Mounted Drinking Bubbler optionally available, provides a drinking bubbler that meets ADA requirements and lead free requirements of NSF61, Section 9 and CHSC 116875. This option also includes a separate pushbutton and non-metering Air-Control valve with .7 GPM flow control.

GUIDE SPECIFICATION

Provide and install an Acorn Penal-Ware, 18" wide ADA Compliant Lavatory with Rectangular Bowl, Front Access (specify model number and options). Unit shall conform with ANSI, UFAS, CBC and ADA 2010 requirements for accessibility. Fixture shall be fabricated from 14 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Provide Air-Control pneumatically operated, metering, non-hold open valve with ADA compliant pushbutton. Valve and Bubbler conform with lead free requirements of NSF61, Section 9 and CHSC 116875. Cabinet bottom shall be removable and secured with tamper-resistant screws. Cabinet interior shall be sound deadened with fire-resistant material. Fixture shall be furnished with necessary fasteners for proper installation.

Page 1 P.1652FALRB

Revised: 11/13/24

Penal-Ware® 1652FALRB: 18" Lavatory with Lavy Rectangular Bowl - ADA Compliant - Front Access

WALL THICKNESS AND TYPE (Must Specify)

Type: 🗋 Concrete 🗋 Block 🗋 Steel Thickness:

MODEL AND OPTIONS SELECTION:

BASE MODEL NUMBER

1652FALRB 18" Lavy w/ Rectangular Bowl -ADA Compliant - Front Access

FIXTURE MOUNTING AND WASTE (Must Specify) Off-Floor, Wall Outlet

1-1

SPOUT SELECTION (Must Specify)

- 🗋 -DMB Deck Mounted Bubbler, Specify: -BP Penal Bubbler -BC Code Bubbler -DMS Deck Mounted Spout
- Hemispherical Penal Bubbler 🗋 - BPH

VALVE SELECTION (Must Specify)

VALVE SELECTION (Must Specify)		
Air-Control (Pneumatic)		
🛄 -03-М	Single Temp, Metering	
🗋 -04-M	Hot & Cold, Metering	
Master-Trol [®] (Electronic)		
-EVS1	Single Temp	
-EVS2	Hot & Cold	
-EVSP1	Single Temp, Piezo Button	
-EVSP2	Hot & Cold, Piezo Buttons	

Master-Trol® PLUS (Electronic)

- -MTP1 Single Temp
- -MTP2 Hot & Cold
- -MTPP1 Single Temp, Piezo Button
- -MTPP2 Hot & Cold, Piezo Buttons

-MIF VAL	
🗋 -PFB	Power Failure Bypass
	(Provides drinking water in the event of power failure)

Time-Trol[®] (Electronic)

-MVC1	Single Temp
-MVC1-BAT	Single Temp Battery Powered
	(Batteries Not Included)
-MVC2	Hot & Cold
-MVC2-BAT	Hot & Cold Battery Powered
	(Batteries Not Included)

Programmable (Electronic) w/9VDC Plug-In Transformer

- 🗋 -PPZ1 Single Temp Programmable Piezo Button Hot & Cold Programmable Piezo Button
- 🗆 -PPZ2

Valve Bv Others

- 9	Punched for Valve by Others
	(Select when using "Deck Punching" Option)

NOTES

- 1. Wall Mounting Anchors (By Others)
- 2. Removable Trap Enclosure
- 3. Lavy Valve Pushbuttons
- 4. -DMS Deck Mounted Spout
- 5. -DMB Deck Mounted Drinking Bubbler Option

DECK PUNCHING (1-5/16" Diameter)

- 🗋 -H1 Single Hole Centered
- Two Holes 4" Centerset 🗋 -H24
- Two Holes 8" Centerset 🗋 -H28
- (will eliminate soap depression)
- 🗋 -H34 Three Holes 4" Centerset
- 🗋 -H38 Three Holes 8" Centerset (will eliminate soap depression)

VALVE OPTIONS

- -BRS Brass Body Valve
- Cycle Interrupt for Time-Trol® Valves 🗋 -CI
- 🗋 -PBH Hemispherical Pushbutton
- 🗋 -TF Transformer, 120VAC to 24VAC (-MVC option only)


CABINET OPTIONS

- 🗋 -FMT Fixture Mounted Trim
- 🛄 -ТВ Toothbrush Holder 🔲 Left 🛄 Right
- 🗆 -TG 12 Gage Cabinet
- 🗋 -TH Towel Hook 🔲 Single 🗋 Double 🗋 Left 🛄 Right

LAVATORY WASTE OPTIONS

Lavy Waste Extension (3" Standard) 🗋 -LWE Specify Length Beyond Fixture: -OF Lavatory Overflow

PRODUCT OPTIONS -DMB Deck Mounted Drinking Bubbler (Cold water only) N/A with -03-M tempered supply -BP Penal Style -BC Code Style -BPH Penal Hemispherical Style 🗋 -EG Enviro-Glaze, Specify Color: 🗋 - MT Metal Template (Only 1 Required Per Project) 🗖 -SW Wall Sleeve AcornVac System 🗆 -VAC

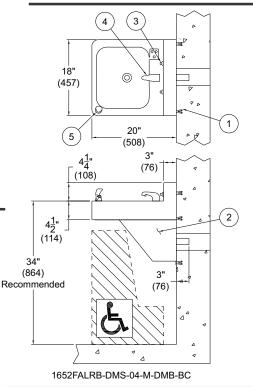

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov Please visit <u>www.acorneng.com</u> • for most current specifications. Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company Approved for Manufacturing Selection Summary Model No. & Option Company Title Quantity Signature Date

> P.1652FALRB Page 2

Revised: 11/13/24

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • Fax: (626) 961-2200 • www.acorneng.com • E-mail: info@acorneng.com