

Dura-Ware® 2010 Series

Drinking Fountain



2010-1-BC-3

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Drinking Fountain

Fixture is designed to be installed and serviced from the front of a finished wall. Fixture is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction with a satin finish. Bottom of unit includes removable enclosure.

Countertop has a deck-mounted bubbler with mouthguard.

Bowl is oval. Standard close elbow waste outlet is 1-1/4" O.D. plain end.

Valve is an Air-Control pneumatically operated, non-metering, self-closing type. All exposed trim is chrome-plated. Valve has a 0.7 GPM flow control. Valve and bubbler conform with the lead-free requirements of NSF61, Section 9,1997 and CHSC 116875.

Regularly furnished items include an Air-Control self-closing valve, a bubbler with mouthguard, a grid strainer with close elbow and a mounting bracket. Screws and anchor shields by others.

GUIDE SPECIFICATION

Provide and install Acorn Dura-Ware Drinking Fountain (specify model number and options). Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Fixture shall be furnished with an Air-Control self-closing valve, a bubbler with mouthguard, a grid strainer with close elbow, and a mounting bracket. Valve and bubbler conform with the lead-free requirements of NSF61, Section 9,1997 and CHSC 116875. Installer shall furnish mounting screws, anchor shields, and required reinforcement.

Dura-Ware® 2010 : Drinking Fountain

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

2010 Drinking Fountain

FIXTURE MOUNTING AND WASTE (Must Specify)

-1 Off-Floor, Wall Outlet

BUBBLER SELECTION (Must Specify)

- □ -BC Bubbler, Code
 □ -BP Bubbler, Penal
- ☐ -BPH Bubbler, Penal Hemispherical

VALVE SELECTION (Must Specify)

- ☐ -3 Air-Control, Single Temperature
- ☐ -MVC1 Time-Trol Single Temp
- ☐ -PPZ1 Programmable Piezo Button Single Temp


PRODUCT OPTIONS (Must Specify)

🔲 -BRS	Brass Body Valve
🔲 -EG	Enviro-Glaze Color, Specify:
🔲 -FG	14 Gage Housing
🔲 -FP	Freeze Resistant Box
□-GT	Grid Strainer with Tailpiece 1-1/4"

Tubular P-Trap 1-1/4" x 1-1/2"

Please visit **www.acorneng.com** for most current specifications.

-TPT

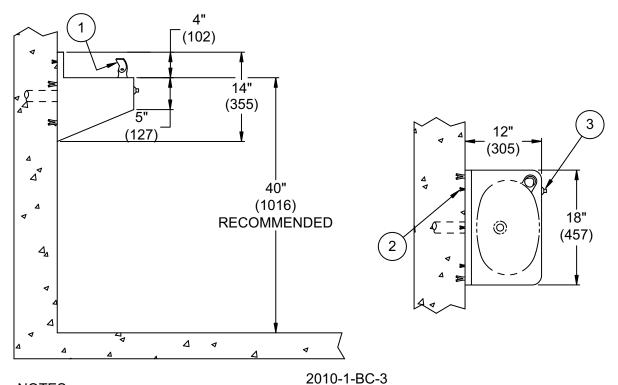

NOTES:

- 1. Drinking Bubbler with Mouthguard.
- 2. Wall Mounting Anchors (By Others).

3. Valve Pushbutton.

	Λ	WARNING: Cancer a	nd Reproductive Harm	- www.P65Warnings.ca.gov
--	---	-------------------	----------------------	--------------------------

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acom assumes no responsibility for use of void or superseded data. © Copyright 2009 Acom Engineering Company					
Selection Summary	Approved for Manufacturing				
Model No. & Option	CompanyTitle				
Quantity	Signature Date				

Page 2 D.2010 Revised: 08/21/18