

Dura-Ware[®] 2020 Series Drinking Fountain, Two and Three Station - ADA Compliant



Drinking Fountains, Two and Three Station - ADA Compliant

Fixture is designed to be installed and serviced from the front of a finished wall. Fixture is fabricated from 16 gage, type 304 stainless steel and is seamless welded construction with a satin finish. Bottom of unit includes removable enclosure. Unit conforms with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

Countertop has deck-mounted bubblers, each with a mouthguard, the left hand station providing ADA compliance.

Bowl is oval. Standard close elbow waste outlet is 1-1/4" O.D. plain end.

Valves are air control, pneumatically operated, non-metering, self-closing type. All exposed trim is chrome-plated. Air control valves have a 0.7 GPM flow control. ADA compliant pushbutton requires less than 5 pounds push to activate valve. Valve and bubbler(s) conform with the lead-free requirements for NSF61, Section 9,1997 and CHSC 116875.

Regularly furnished items include an air control self-closing valve, bubblers with mouthguards, grid strainer with close elbow, and mounting brackets. Screws and anchor shields by others.

GUIDE SPECIFICATION

Provide and install Acorn Dura-Ware, ADA Compliant Two or Three Station, Drinking Fountain (specify model number and options). Left hand station shall comply with ADA requirements. Fixture shall be fabricated from 16 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Fixture shall be furnished with Air-Control self-closing valve, bubblers with mouthguards, grid strainer with close elbow, and mounting brackets. Valve and bubbler(s) conform with the lead-free requirements for NSF61, Section 9,1997 and CHSC 116875. The pushbutton for the air control valve shall be ADA compliant. Installer shall furnish mounting screws, anchor shields and required reinforcement. Units to conform with ANSI, UFAS and ADA requirements for accessibility.

Page 1 D.2020 Revi

Revised: 08/21/18

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

2020 Drinking Fountain, Two Station, ADA Compliant
2030 Drinking Fountain, Three Station, ADA
Compliant

FIXTURE MOUNTING AND WASTE (Must Specify)

✓ -1 Off-Floor, Wall Outlet

BUBBLER SELECTION (Must Specify)

□ -BC Bubbler, Code □ -BP Bubbler, Penal


- VALVE SELECTION (Must Specify)
- □ -3 Air-Control, Single Temperature
- -MVC1 Time-Trol Single Temp
- -PPZ1 Programmable Piezo Button Single Temp

PRODUCT OPTIONS (Must Specify)

-AB Angle Braces

- -BRS Brass Body Valve
- -EG Enviro-Glaze Color, Specify:
- -FG 14 Gage Housing
- -FP Freeze Resistant Box
- Grid Strainer with Tailpiece 1-1/4"
- □ -TPT Tubular P-Trap 1-1/4" x 1-1/2" Includes Trap Enclosure (Not ADA Compliant)

Please visit **www.acorneng.com** for most current specifications.

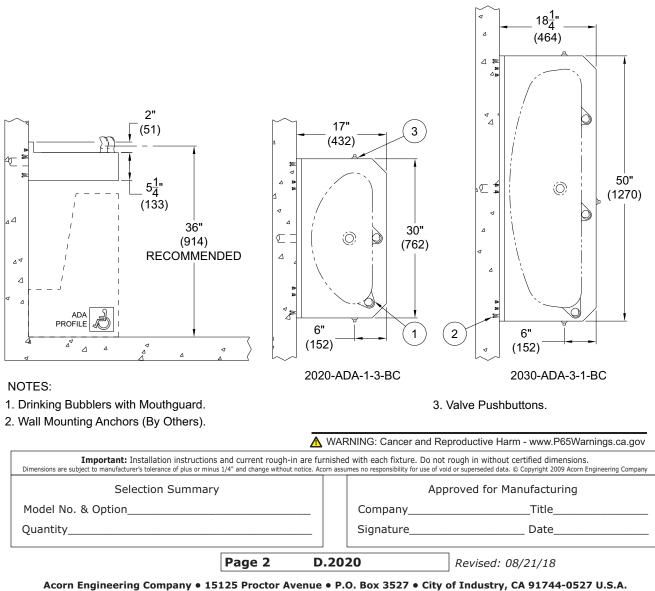

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • Fax: (626) 961-2200 • www.acorneng.com • E-mail: info@acorneng.com