



## Meridian® 2140 Series Blowout Jet Toilet - Wall Outlet



2140-W-2-RM

Fixture May Show Some Available Options



Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Blowout Jet Toilet

**Meridian® Toilet** contoured Housing features an attractive, satin finish and optionally available with a High Polish Finish (-HP) for an exceptional, elegant appearance. The standard Toilet Bowl has a matte finish on the inside. Mounting is available for front or rear installations. Unit includes punching for an elongated Hinged Seat. (-HS Hinged Seat is optionally available.) Housing includes Access Panel on each side for installation of fixture and Hinged Seat.

**Toilet** is a Blowout Jet type with an elongated Bowl manufactured to ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.28 GPF. P-Trap has a minimum 3-1/2" Seal and will pass a 2-1/8" Ball and is fully enclosed.

**Flush Valve** supply is available for exposed or concealed Flush Valve styles with 1-1/2" NPT connection.

**Front Mount (-FM)** unit includes a fixture-to-wall Mounting Plate with exposed vandal-resistant fasteners. Mounting Plate is mounted directly to a reinforced wall or to an optional -MC Mounting Carrier (6" bolt centers) for off-floor, Front Mount models. Waste Outlet connection for Front Mount (-FM) unit is 5-1/2" diameter recessed Gasket Flange.

**Rear Mount (-RM)** unit includes integral 1/2" UNC Anchor Tapping and mounting hardware. Unit requires an accessible pipe chase for installation. Waste Outlet connection for Rear Mount (-RM) unit is a 2-3/8" OD stainless steel plain end.

### GUIDE SPECIFICATION

Acorn Meridian® Blowout Jet Toilet (specify model number and options). Fixture to be heavy gage type 304 stainless steel. Exposed surfaces shall be polished to a satin finish. Housing to include side Access Panels and punching for Hinged Seat. Toilet shall meet ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.28 GPF. Toilet P-Trap shall have a minimum 3-1/2" Seal that shall pass a 2-1/8" diameter Ball and be fully enclosed.

# Meridian®: 2140 Blowout Jet Toilet - Wall Outlet



## WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type: ☐ Concrete ☐ Block ☐ Steel

## MODEL NUMBER AND OPTIONS SELECTION:

### BASE MODEL NUMBER

☒ 2140 Blowout Jet Toilet

### SUPPLY SELECTION (Must Specify)

☐ -T Top (Exposed)  
☐ -W Wall (Concealed)

### FIXTURE MOUNTING & WASTE (Must Specify)

☐ -1 Off-Floor, Wall Outlet  
☐ -2 On-Floor, Wall Outlet

### INSTALLATION (Must Specify)

☐ -FM Front Mount  
☐ -RM Rear Mount

### TOILET SEAT HEIGHT (15" STANDARD)

☐ -ADA 18" Integral Seat Height

### FLUSH VALVE GPFs (Must Specify)

☐ -1.28 GPF (HET)  
☐ -1.6 GPF (Not Available in California)  
☐ -3.5 GPF (Not Available in California)

### FLUSH VALVE OPTIONS (Must Specify)

**\*NOTE: FOR FLUSH VALVE ACCESS PANEL OR COVER REFER TO ACORN OPTIONS MODEL #2898 (-W SUPPLY) OR # 2802 (-T SUPPLY).**

☐ -FV Flush Valve, Mechanical (N/A for ADA)  
☐ -FVBO Flush Valve by Other  
☐ -FVH Flush Valve, Hydraulic (N/A for Top Supply)  
☐ -FVL Flush Valve, ADA Lever Handle  
☐ -MVCFV Time-Trol Flush Valve (N/A for Top Supply)

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

## TOILET SEAT OPTIONS


☐ -HS-OFCL Hinged Seat, Open Front Less Cover  
☐ -HS-OFWC Hinged Seat With Cover  
☐ -LPFS Less Punch for Hinged Seat

## TOILET OPTIONS

☐ -CO1 Cleanout with O-Ring to No-Hub 2-3/8" x 4" (-RM Models Only)  
☐ -CO1\_3 Cleanout with O-Ring to No-Hub 2-3/8" x 3" (-RM Models Only)  
☐ -FVT Flush Thru Wall Connector  
☐ -GW Gasket Waste (Standard on-FM but Optional on -RM)


## PRODUCT OPTIONS

☐ -BL Bedpan Lugs  
☐ -EGE Enviro-Glaze Color Specify: \_\_\_\_\_ Toilet Exterior Only  
☐ -FG 14 Gage Housing  
☐ -HP High Polish Finish (Exterior Only)  
☐ -MC Mounting Carrier (6" Bolt Centers) (-1-FM Models Only N/A with -ADA option)  
☐ -MT Metal Template  
☐ -SW Wall Sleeve (-RM Models Only)  
☐ -TF Transformer, 120VAC to 24VAC (-MVCFV option)

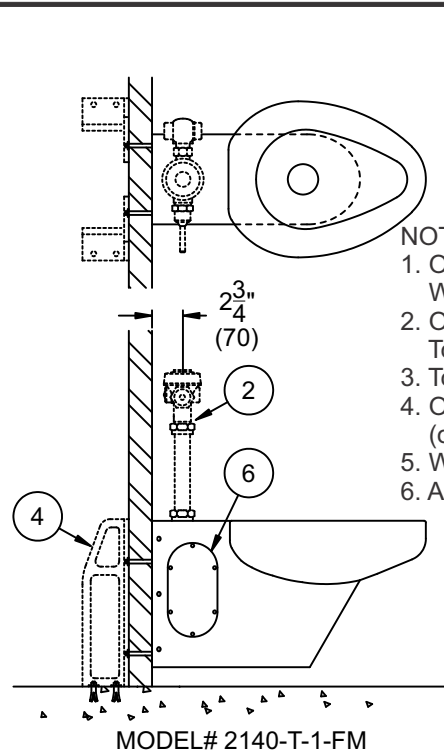

### NOTES:

1. Optional -FV Flush Valve - Wall Supply
2. Optional -FV Flush Valve - Top Supply
3. Toilet Waste Outlet
4. Optional -MC Mounting Carrier (off-floor, Front Mount)
5. Wall Mounting Hardware
6. Access Panel (Both Sides)

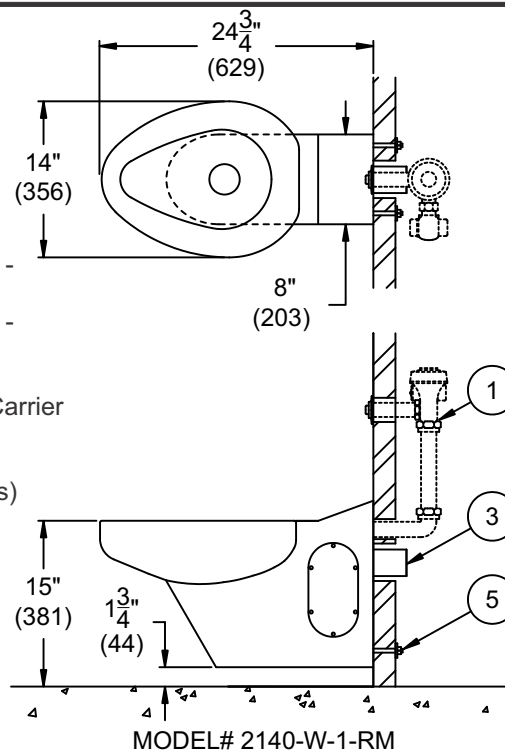

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company	
<b>Selection Summary</b> Model No. & Option _____ Quantity _____	<b>Approved for Manufacturing</b> Company _____ Title _____ Signature _____ Date _____