



## Dura-Ware® 2162 Series Washout Urinal



2162-T-1-FV

2162-W-1-FV-2898

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Washout Urinal

**Fixture** is arranged to be installed on finished wall and serviced from the front side. Fixture is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction. Exterior has a #4 satin finish. Interior has a matte finish. Fixture has a back wall washdown, and is optionally available with a continuous flushing rim that washes all four walls. Corners are covered to facilitate cleaning. P-trap is fully enclosed. Back of fixture is sound-deadened with fire-resistant material.

**NOTE: Not offered for sale in California due to GPF requirements.**

**Urinal** is washout type with back wall washdown manufactured to ASME A112.19.3 and CSA B45.4 requirements. Flushing inlet connection is 3/4" NPT male. Bottom of urinal is sloped to a high capacity stainless steel beehive dome strainer. Strainer is secured with tamper-resistant screws. P-trap has a minimum of 2" seal.

**P-Trap Waste Connection** is made up using an O-ring Adapter Fitting to allow for Front Mounting. Unit is provided with O-ring x 2" NCT (Copper Sweat) Adapter as standard. Alternate Waste Adapter Fitting sizes are optionally available for Threaded and No-hub Connection (WA2, WA3, WA4). Refer to Installation Instructions for additional details.

**Exposed Mounting Screws** are furnished. No concealed wall fasteners or anchor shields are furnished.

### GUIDE SPECIFICATION

Provide and install Acorn Dura-Ware Washout Urinal (specify model number and options). Urinal shall be back wall washdown type. Fixture shall be fabricated from 14 gage, type 304 stainless steel and shall have covered corners to facilitate cleaning. Urinal shall meet ASME A112.19.3 and CSA B45.4 requirements. All welds shall be continuous and exterior surfaces shall have a satin finish. P-trap shall be fully enclosed. Fixture shall be furnished with exposed mounting screws.



# Dura-Ware® 2162: Washout Urinal

## WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

## MODEL NUMBER AND OPTIONS SELECTION

### BASE MODEL NUMBER

2162 Washout Urinal

### SUPPLY (Must Specify)

-T Top (Exposed)  
 -W Wall (Concealed)

### FIXTURE MOUNTING AND WASTE

-1 Off-Floor, Wall Outlet

### FLUSH VALVE GPF's (Must Specify)

-1.0 GPF  
 -1.5 GPF

## FLUSH VALVE OPTIONS (Must Specify)

Refer to Acorn Dura-Ware Supplementary for Box Cover(s) and Access Panel(s)

-FV Flush Valve, Mechanical  
 -FVBO Flush Valve by Others  
 -FVH Flush Valve, Hydraulic (N/A for Top Supply)  
 -FVL Flush Valve, ADA Lever Handle (Concealed F.V.)  
 -MVCFV Time-Trol Flush Valve (N/A for Top Supply)

## PRODUCT OPTIONS


-CFR Continuous Flushing Rim  
 -EG Enviro-Glaze Color, Specify: \_\_\_\_\_  
 -FVT Flush Valve Thru Wall Connection  
 -TF Transformer, 120VAC to 24VAC (-MVCFV Option)

## WASTE ADAPTERS


(Includes Waste Adapter for 2" NCT Copper Sweat)

-WA2 Waste Adapter O-ring to 2" NPT Male  
 -WA3 Waste Adapter O-ring to 2" NPT Female  
 -WA4 Waste Adapter O-ring to 2" No-Hub

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

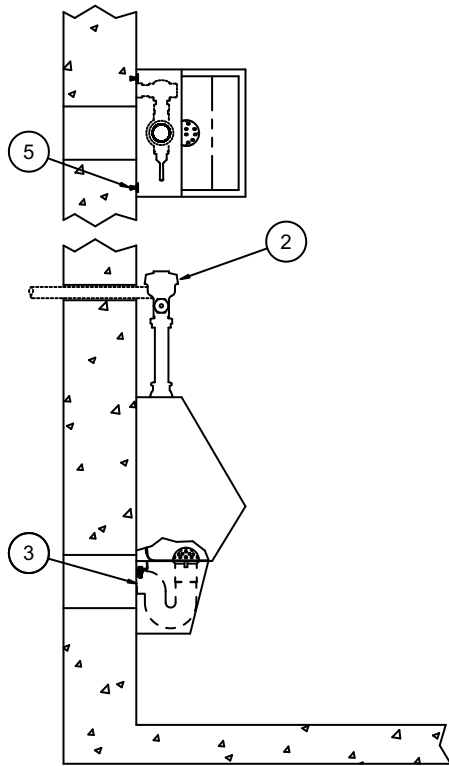

2162-T-1

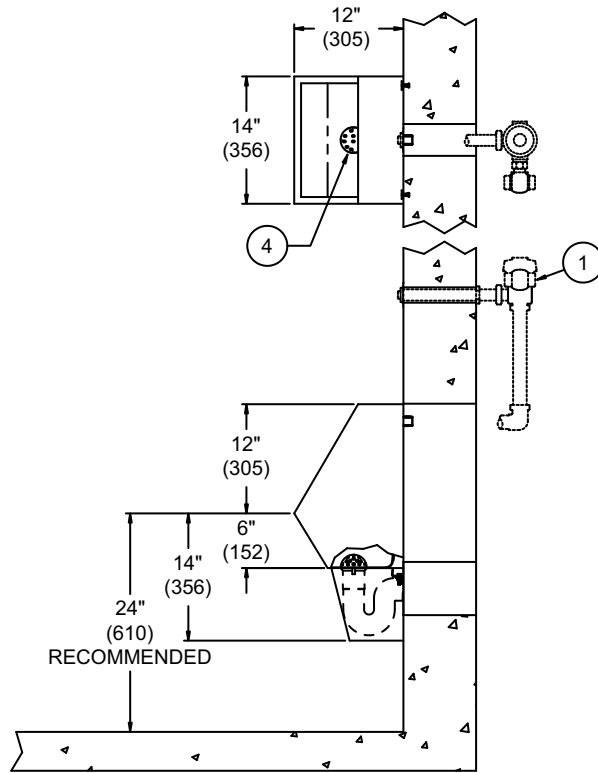

2162-W-1

### NOTES:

- 1. Optional -FV Flush Valve - Wall Supply.
- 2. Optional -FV Flush Valve - Top Supply.
- 3. Urinal Waste Outlet.

- 4. Beehive Strainer.
- 5. Wall Mounting Anchors (By Others).

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>