



Wash-Ware® 3604 Series

Acorn Terrazzo Quad-Lav - 4 Stations - ADA Compliant



3604-2-H

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Acorn Terrazzo Quad-Lav - 4 Stations

Bowl and Sprayhead are reinforced cast Terrazzo. Bowl is 46" (1168mm) wide, and has an Integral Backsplash and Sprayhead. Bowl is finished with a clear polyurethane coating. Standard color is Palomino Tan. See available color selection.

Pedestal Housing features molded Terrazzo sides and a heavy gage, stainless steel, Front Access Panel. Pedestal is structurally reinforced.

Accessibility

Units conform with ANSI, UFAS, ADA, CBC and OBC requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

Sectional Control is standard. One Pushbutton or Sensor (specify) actuates one station.

Hand Pushbuttons (suffix option -H) operate individual non-hold open, Air-Controlled Metering Valves and can be field set for flow ranging from 5 to 60 seconds. Pushbutton requires less than 5 pounds of force to activate valve.

Electronic Sensor Operation (suffix option -SO) includes individual Solenoid Valves activated by Infrared Sensors. A plug-in style transformer is provided.

Foot Pushbuttons are not available on this model.

Spray Nozzles are vandal-resistant and provide a concentrated 0.5 GPM spray at each station.

Hot & Cold Supplies are blended in an ASSE 1070 compliant temperature/pressure balancing Mixing Valve with Integral Checks and Strainers. A minimum of 30 PSI supply pressure is required.

GUIDE SPECIFICATION

Provide and install Acorn Terrazzo Quad-Lav (specify model number and options). Bowl shall be reinforced cast Terrazzo polished and sealed with a clear polyurethane coating, and shall have an Integral Backsplash and Sprayhead. Spray Nozzles shall be vandal-resistant type with 0.5 GPM flow controls. Provide an ASSE 1070 compliant temperature/pressure balancing Mixing Valve with Integral Checks and Strainers in hot and cold supply and field set water temperature at 105 degrees Fahrenheit. Terrazzo Quad-Lav shall be supplied with Mounting Angles and Brackets for anchoring to the wall as recommended by manufacturer. Units conform with ANSI, UFAS, ADA, CBC and OBC requirements for accessibility.

Wash-Ware®: 3604 Acorn Terrazzo Quad-Lav - 4 Station - ADA Compliant



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER (Must Specify)

-3604 On-Floor, Semi-Circular, 4 Station Quad-Lav

FIXTURE MOUNTING AND WASTE (Must Specify)

-2 On-Floor, Wall Outlet

OPERATION (Must Specify)

- H Hand Operation
- PPZ Programmable Piezo Pushbutton Electronic Metering
- SO Sensor Operation
- SO-BAT Sensor Operation (Batteries Not Included)

TERRAZZO® COLOR OPTIONS (Must Specify)

Color: _____
(Refer to <https://www.acorneng.com/terrazzo-colors>)

PRODUCT OPTIONS

- PDM Metering Liquid Soap Dispenser
- ST Single Temperature Supply

RIM HEIGHT OTHER THAN STANDARD


Note: 34" Max Rim Height - Complies to ADA, OBC and CBC

- JH31 31" ADA/CBC Children's Rim Height

SUPPLY AND VENT


Not applicable to this model

Please visit www.acorneng.com for most current specifications.

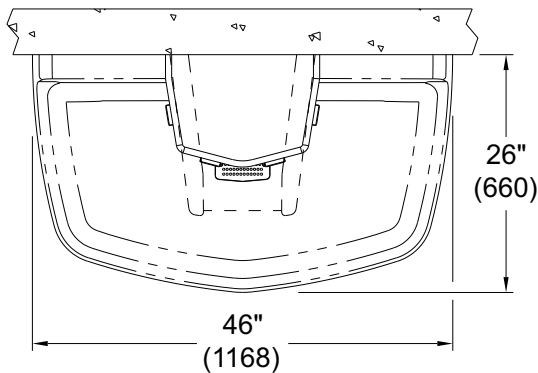


NOTES:


1. -H Hand Operated Pushbutton
2. Spray Nozzle
3. Access Panel
4. -SO Sensor Operation

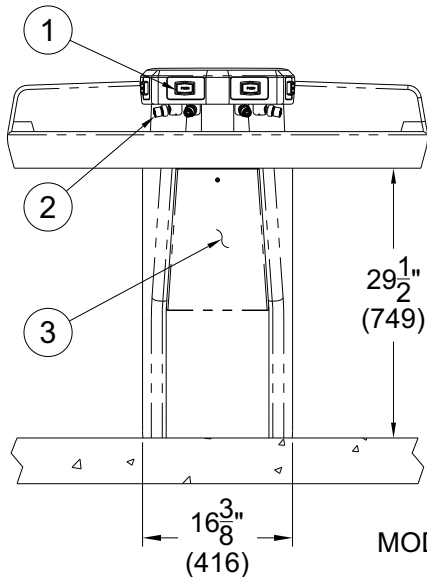

MODEL #3604-2-H

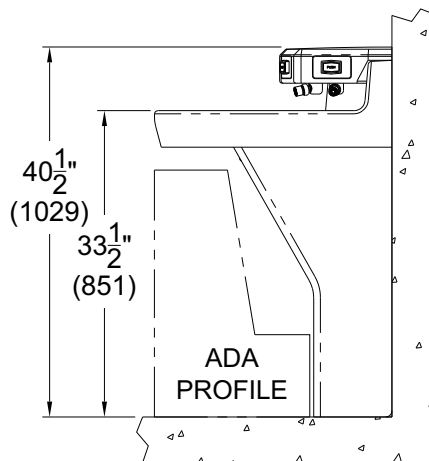

ADA PROFILE

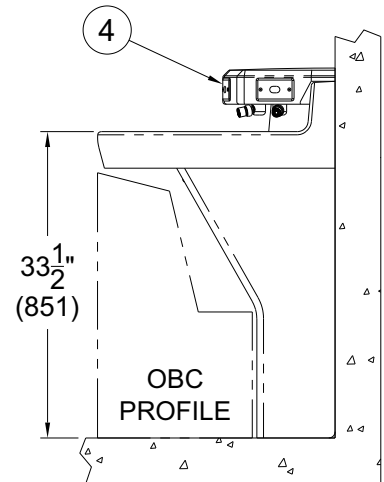

OBC PROFILE

MODEL #3604-2-SO

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>