



Secur-Care® - Ligature Resistant LR1741 Series

Ligature Resistant - Wall Shower



LR1741-03-M-RD

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Acorn - Ligature Resistant - Wall Shower

Ligature Resistant Shower is arranged to be installed on finished wall and serviced from an accessible pipe chase. Back of Shower Panel is provided with Anchor Tappings. Optional Wall Sleeve or Metal Template is recommended for all installations for required wall openings. Fixture is fabricated from 14 gauge, type 304 stainless steel with a #4 satin finish.

Conical Showerhead is chrome-plated brass and is Ligature-Resistant. The spray pattern is non-adjustable.

Optional Valves available include Electronic metering options and Air-Control metering. Air-Control Valves are pneumatically operated using atmospheric air. Pushbutton is Ligature-Resistant and requires less than 5 pounds of force to activate Valve. Valve is metering type with non-hold open feature. Timing is adjustable from 5 to 60 seconds on Air-Control Valve and adjustable from 1 second to 1 hour on electronic Valve. Valve includes a 1.6 GPM Flow restrictor and can be remotely located up to 10 feet from the operating Pushbutton. Valve conforms with Lead-Free requirements of NSF61, Section 9.

Regularly furnished items include an metering Air-Control Valve, a Showerhead, and Mounting Hardware for walls up to 12" thick.

GUIDE SPECIFICATION

Provide and install Secur-Care® - Ligature-Resistant - Wall Shower (specify model number and options). Shower Panel is fabricated from 14 gauge, type 304 stainless steel with a #4 satin finish. Trim is stainless steel or chrome-plated brass. Shower Valve shall be Air-Control, metering, non-hold open type. Fixture shall be furnished with necessary fasteners for proper installation.

Secur-Care® - Ligature Resistant: LR1741

Ligature Resistant Wall Shower



WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: Concrete Block Steel

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

LR1741 Ligature Resistant Wall Shower

VALVE SELECTION (Must Specify)

Air-Trol (Pneumatic)

- 03-M Single Temp, Metering
 -04-M Hot & Cold, Metering

Master-Trol (Electronic)

- EVS1 Single Temp
 -EVS2 Hot & Cold
 -EVSP1 Single Temp, Piezo Button
 -EVSP2 Hot & Cold, Piezo Buttons

Master-Trol PLUS (Electronic)

- MTP1 Single Temp
 -MTP2 Hot & Cold
 -MTPP1 Single Temp, Piezo Button
 -MTPP2 Hot & Cold, Piezo Buttons

Time-Trol (Electronic)

- MVC1 Single Temp
 -MVC2 Hot & Cold

Programmable (Electronic) w/9VDC Plug-In

Transformer

- PPZ1 Single Temp Programmable Piezo Button
 -PPZ2 Hot & Cold Programmable Piezo Button

VALVE OPTIONS

- BRS Brass Body Valve
 -MA2 Manifolder, 2-Stack
 -TF Transformer, 120VAC to 24VAC (-MVC option only)


SHOWERHEAD OPTIONS

- CSHS Conical Showerhead With Swivel
 -F Flow Control, Must Specify:
 2.0 GPM (Not Intended For Use in California)

PRODUCT OPTIONS

- EG Enviro-Glaze, Specify Color: _____
<https://www.acorneng.com/enviro-glaze-powder-powder-coating>
 -MT Metal Template (Only 1 Required Per Project)
 -RD Recessed Soap Dish
 -SW Wall Sleeve

Please visit www.acorneng.com for most current specifications.

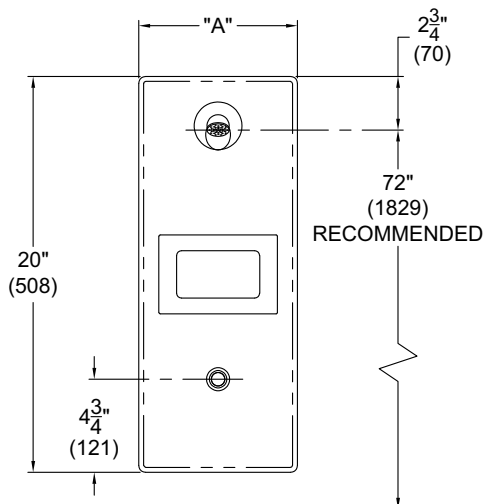


MODEL	'A'
SINGLE TEMP VALVE	8" (203)
HOT & COLD	10" (254)

NOTES:

- ① -03-M AIR-CONTROL METERING VALVE SHOWN
- ② CONICAL SHOWERHEAD
- ③ RECESSED SOAP DISH, SHOWN
- ④ HEMISPHERICAL PUSHBUTTON
- ⑤ WALL MOUNTING HARDWARE

LR1741-03-M-RD

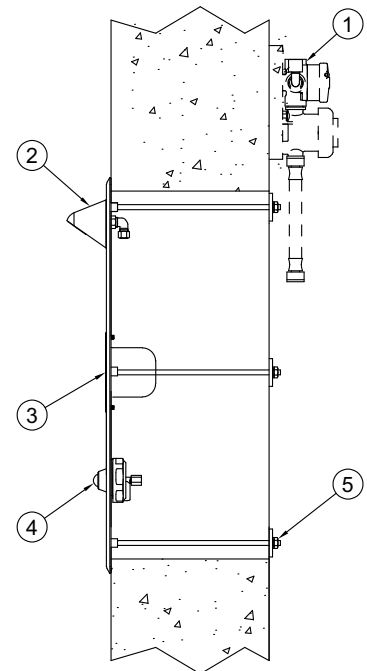

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>