



## Acorn - Ligature Resistant LR2141-3 Series Ligature Resistant Siphon Jet Toilet - Floor Outlet



LR2141-W-3-RM

Fixture May Show Some Available Options



Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Ligature Resistant Siphon Jet Toilet - Floor Outlet

**Ligature Resistant Toilet** contoured ligature resistant housing is fabricated from 16 gage type 304 stainless steel and polished to a satin finish. The inside of the toilet bowl also has a satin finish. Engineered to reduce possible risk of the fixture being used as a ligature device. Mounting is intended for rear installations. Housing includes access panel on each side for installation of fixture.

**Toilet** is a Siphon Jet Floor Outlet type with ligature resistant elongated bowl manufactured to ASME A112.19.3 and CSA B45.4 requirements and will flush with a minimum of 25 PSI flow pressure. Trap has a minimum 3-1/2" seal, will pass a 2-1/8" ball and is fully enclosed. Waste outlet connection is a 7-1/2" diameter recessed gasket flange.

**Flush Valve** supply is available for exposed or concealed flush valve styles with 1-1/2" NPT connection.

**Rear Mount** units include integral 1/2" UNC anchor tapping and mounting hardware. Unit requires an accessible pipe chase for installation.

#### GUIDE SPECIFICATION

Acorn Ligature Resistant Siphon Jet Floor Outlet Toilet, On-Floor (specify model number and options). Fixture to be 16 gage type 304 stainless steel. Exposed surfaces shall be polished to a satin finish. Housing to include side access panels. Toilet shall meet ASME A112.19.3 and CSA B45.4 requirements and will flush with a minimum of 25 PSI flow pressure. Toilet trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball and be fully enclosed.

# Acorn - Ligature Resistant LR2141-3: Siphon Jet Toilet - Floor Outlet



## WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

## MODEL NUMBER AND OPTIONS SELECTION:

### BASE MODEL NUMBER

LR2141 Siphon Jet Toilet

### SUPPLY SELECTION (Must Specify)

-T Top (Exposed)(LRFVC Required)  
 -W Wall (Concealed)

### FIXTURE MOUNTING & WASTE

-3 On-Floor, Floor Outlet

### INSTALLATION

-RM Rear Mount

### FLUSH VALVE GPF (Must Specify)

-1.28 GPF (HET)  
 -1.6 GPF (Not Available in California)

### FLUSH VALVE OPTIONS (Must Specify)

**\*NOTE: FOR FLUSH VALVE ACCESS PANEL OR COVER REFER TO ACORN OPTIONS MODEL #2898 (-W SUPPLY) OR #2802 (-T SUPPLY).**

-FV Flush Valve, Mechanical (N/A for ADA)  
 -FVBO Flush Valve by Others  
 -FVH Flush Valve Hydraulic (N/A for Top Supply)  
 -MVCFV Time-trol Electronic F. V. (N/A for Top Supply)

## TOILET OPTIONS

-FG 14 Gage Housing  
 -FVT Flush Valve Thru-Wall Connection



## PRODUCT OPTIONS

-ADA 18" ADA Integral Seat Height  
 -EG Enviro-Glaze Color Specify: \_\_\_\_\_  
 Toilet Interior & Exterior  
 -EGE Enviro-Glaze Color Specify: \_\_\_\_\_  
 Toilet Exterior Only  
 -HP High Polish Finish (Exterior Only)  
 -MT Metal Template  
 -SW Wall Sleeve  
 -TF Transformer for Time-Trol  
 -VAC AcornVac System

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

## NOTES:

1. Optional -FV Flush Valve - Wall Supply
2. Optional -FV Flush Valve - Top Supply
3. Toilet Floor Waste Outlet
4. Wall Mounting Hardware
5. LRFVC Flush Valve Cover

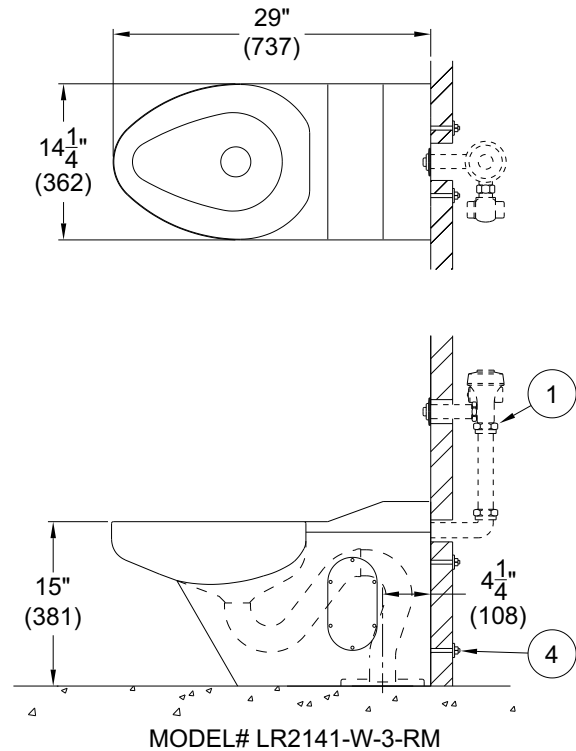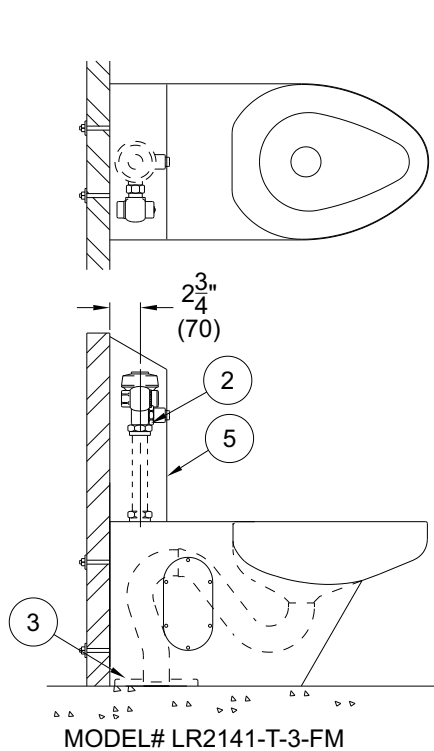

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions.                  Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>