Model S0701

Deck Mounted, Self Closing Drench Hose

■ Model: S0701



SPECIFICATIONS:

Model S0701 is a deck mounted eye/face and body drench hose with an ABS plastic eye/face wash spray head, self-closing squeeze lever valve and an eight foot reinforced PVC hose.

NOTE: ANSI Z358.1 states that drench hoses are used as supplements, but do not replace other types of emergency equipment.

STANDARD EQUIPMENT:

Spray Head Assembly: ABS yellow plastic Eye/Face Wash heads supplied by a combined integral 1.85 GPM (7 LPM) Flow Control, with integral flip Dust Covers, internal Flow Controls and Filters to remove debris from the water. An anti-microbial agent is molded into the ABS material, providing integrated protection.

Valve: Chrome plated brass selfclosing valve with a stainless steel squeeze lever.

Hose: An 8 foot yellow PVC hose with a working maximum pressure of 300 psi.

Mounting: Countertop mounting with a deck flange that has a locator guide to position the handle forward.

Water Supply: 3/8" NPT male threaded, chrome plated brass swivel inlet.

Universal Sign: ANSI compliant, vertical identification sign.

Weekly Test Tag: A waterproof test card to record the date and inspector's name for weekly functional testing of the unit.

MECROBIAL

OPTIONAL ACCESSORIES:

Additional costs may be incurred

☐ -BFP Back flow preventer, double check valve with vent to atmosphere

☐ -ET71-1-BVS-OTG Therm

Thermostatic mixing valve is ASSE Listed per the ASSE 1071 standard. The tepid output water complies with ANSI Z358.1 standard. Valve includes Ball Valve Shut-offs, Outlet Temperature Gauge

☐ -HG Under counter hose guide to prevent the hose from tangling

□ -IWH1 Instantaneous water heater - 208 volts□ -IWH2 Instantaneous water heater - 240 volts

-SDC Stainless steel dust covers

-SSH 8 foot flexible stainless steel hose





Acorn Safety assumes no responsibility for use of void or superseded data. © Copyright Acorn Safety*, City of Industry, CA, Division of Acorn Engineering Company*, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

Submittal # **\$0701** [DH] Revised: 01/09/20

Product complies to the following standards:





Division of Acorn Engineering Company®, Member of Morris Group International™ P.O. Box 3527 City of Industry, CA 91744 U.S.A. Phone 800-591-9372


www.acorneng.com

626-855-4804

TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety[®] assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety[®], A Division of Acorn Engineering Company[®], Member of Morris Group International[™]. Please visit www.acorneng.com for most current specifications.

☐ Model S0701 : Deck Mounted, Self Closing Drench Hose

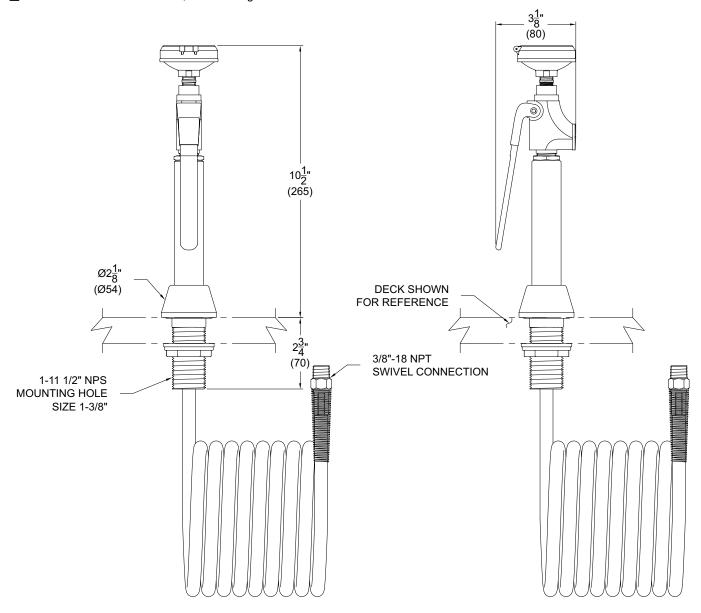

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

\$0701 Revised: 01/09/20

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY VAL FOR STURING	Model Number & Options		Quantity	ACORO SAFETY
LECTION SI & APPROVA MANUFACTI	Contact Signature (Approval for	Title		800-591-9372 or 626-855-4804
SELI R.	Manufacturing)	Date		www.acorneng.com