



## Terrazzo-Ware® Shower Base - Fully Flanged Shower Series



SBC-36-FF

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Fully Flanged Shower Bases

**Shower Base** is an attractive, easy to maintain, spacious shower receptacle. It is designed for durability and ease of installation. **ACORN Terrazzo-Ware®** precast shower bases provide flexibility in configuration and size as required by the design of the building and the specific installation. Custom sizes and colors are also available.

**Fully Flanged** on all sides of the fixture allows the installer to construct tiled walls and a tiled threshold. The sides have galvanized tiling flanges that extend at least 1½" above the 1¼" wide shoulder, and 2 ½" wide threshold.

**Construction** is one-piece, precast terrazzo composed of marble chips cast in Portland cement to provide a compressive strength of at least 3,000 PSI seven days after casting. The shower base surface is provided with slip-resistant bathing surface and sealed to provide years of service.

**Integral Drain** is supplied with a removable, stainless steel grid strainer and provides for an inside caulked connection to a 2" pipe. The shower base has coved corners and is sloped to the drain outlet to provide positive drainage. A vandal resistant strainer is optionally available.

**Compliance Standards:** Terrazzo Shower Bases have Third Party Certification of conformance with CSA B45.8/IAPMO Z403 Terrazzo, Concrete and Natural Stone Plumbing Fixtures which includes specific provision for Slip Resistance (Section 4.4.4) and Referenced Standard ASTM F462 Standard Consumer Safety Specification for Slip-Resistant Bathing Facilities.

#### GUIDE SPECIFICATION

Provide and install an **ACORN Fully Flanged Shower Base** (specify model number and options). Shower Base shall be made of precast terrazzo to produce a compressive strength of at least 3,000 PSI seven days after casting. Base shall be provided with slip-resistant bathing surface and sealed. No air holes or pits shall be allowed on the finished surface. Base shall have coved corners and be sloped to the drain outlet for positive drainage. Integral drain shall have a stainless steel strainer and provide for an inside caulk connection to a 2" pipe. The manufacturer will provide to the installer the necessary installation instructions.

# Terrazzo-Ware®: Shower Base-Fully Flanged Shower Series



## BASE MODEL & TYPE

- SBC-36-FF** 36" Terrazzo Shower Base, Corner Fully Flanged All Sides
- SBC-40-FF** 40" Terrazzo Shower Base, Corner Fully Flanged All Sides
- SBR-4832-FF** 48" x 32" Terrazzo Shower Base, Rectangular Fully Flanged All Sides
- SBS-32-FF** 32" Terrazzo Shower Base, Square Fully Flanged All Sides
- SBS-36-FF** 36" Terrazzo Shower Base, Square Fully Flanged All Sides
- SBS-40-FF** 40" Terrazzo Shower Base, Square Fully Flanged All Sides

## SUFFIX OPTIONS





- OCT Optional Color  
<https://www.acorneng.com/terrazzo-colors>
- VRS Vandal Resistant Strainer

## ACCESSORIES

- KDG2 Rubber Drain Gasket for 2" Waste Pipe

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

MODEL NUMBER	TYPE	SIZES/DIMENSIONS		
		A - LENGTH	B	C
SBC-36-FF	CORNER	36" (915)	17" (430)	26-7/8" (685)
SBC-40-FF	CORNER	40" (1015)	20" (510)	28-1/4" (720)
SBR-4832-FF	RECTANGLE	48" (1220)	32" (810)	-
SBS-32-FF	SQUARE	32" (815)	-	-
SBS-36-FF	SQUARE	36" (915)	-	-
SBS-40-FF	SQUARE	40" (1015)	-	-

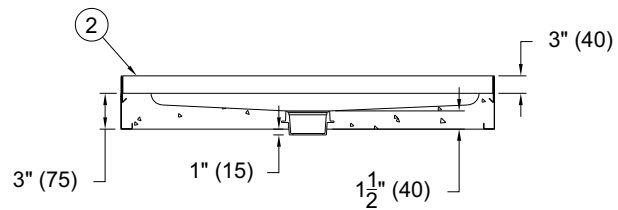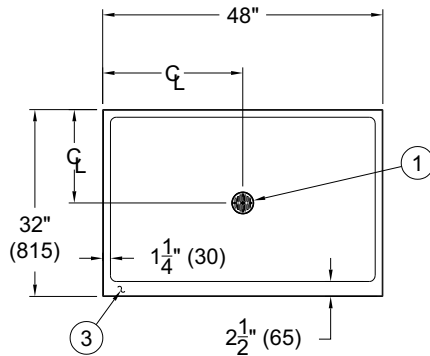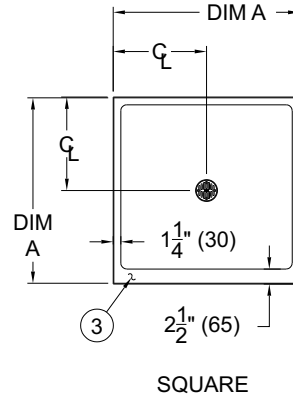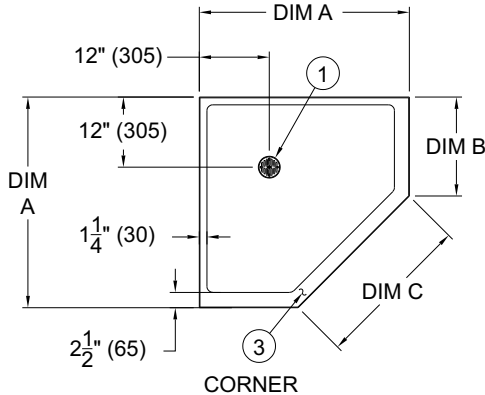

## TERRAZZO FULLY FLANGED SERIES SHOWER BASES

### NOTE:

- 1. Integral Drain with Removable Grid Strainer. Drain provides an inside caulk connection to 2" Pipe
- 2. Tiling Flange
- 3. Shower Base Threshold

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2003 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>