




### Option -04-M

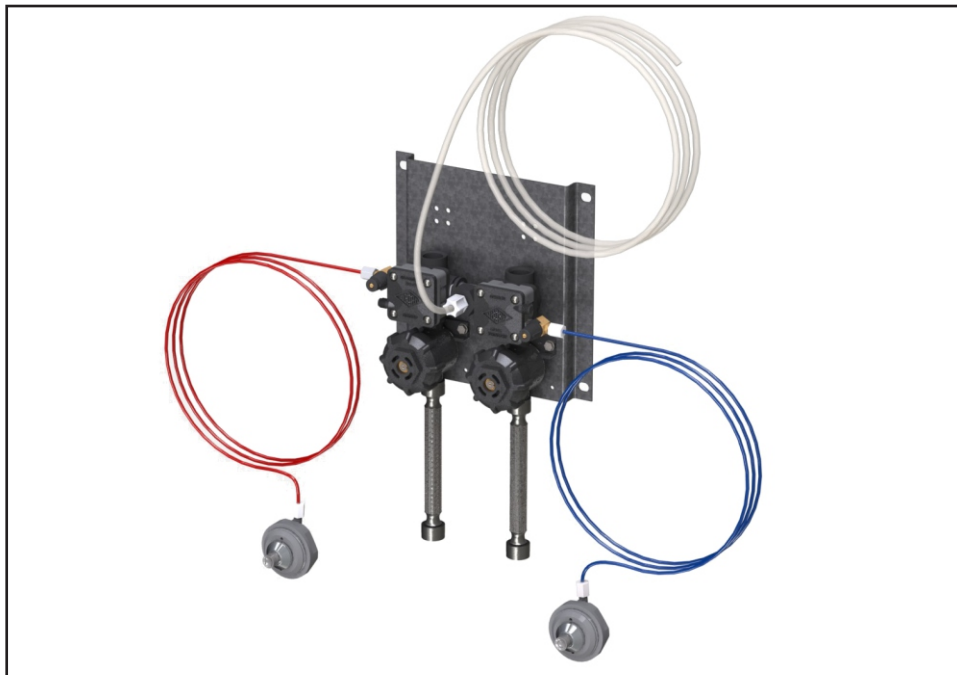

#### **Metering Air-Control, Hot and Cold-**

This hot and cold valve is a pneumatically operated, hand pushbutton, soft closing valve that uses atmospheric air. The pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve can be remotely located up to 10 feet from the actuating button and is ideally suited for small chase areas. Metering provides an adjustable timed cycle flow from the valve. Timing is adjustable from 5 to 60 seconds. Air-Control features non-hold open pushbutton activation, and is provided with a stainless steel strainer and an integral checkstop. Valve conforms with the lead-free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements.

**Optional** -BRS Brass Valve Body & checkstop assembly also available, provides the lead free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements.

#### **Valve Specifications:**

Minimum/Maximum Pressure: 30/100 PSI  
Maximum Water Temperature: 130° F / 54° C

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

