




Option -04

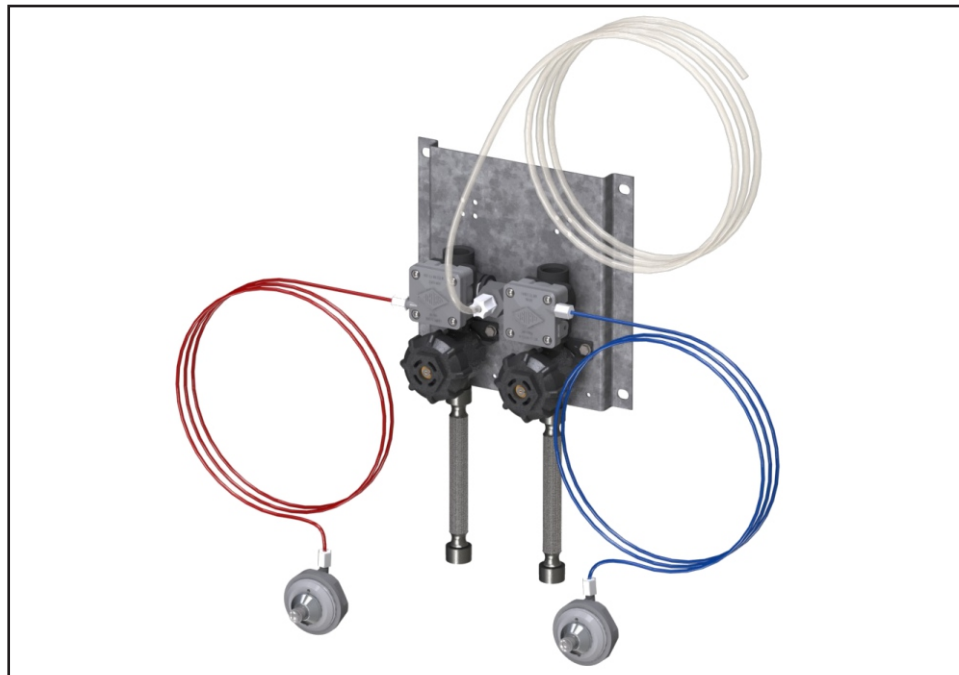

Air-Control, Hot and Cold -

This hot and cold valve is a pneumatically operated, hand pushbutton, soft closing valve that uses atmospheric air. The pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve can be remotely located up to 10 feet from the actuating button and is ideally suited for small chase areas. Valve conforms with the lead-free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements..

Optional -BRS Brass Valve Body & checkstop assembly also available, provides the lead free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements.

Valve Specifications:

Minimum/Maximum Pressure: 30/100 PSI
Maximum Water Temperature: 130° F / 54° C

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

