




Option -BRS

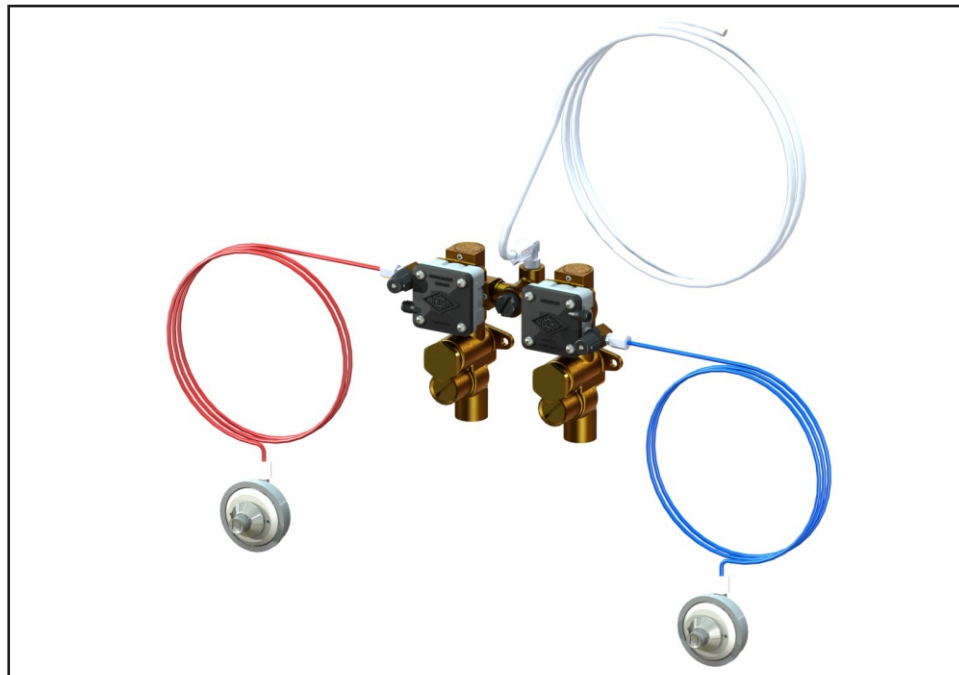

Brass Body Valve -

-BRS Brass Valve Body & checkstop assembly are pneumatically operated, pushbutton valves that use atmospheric air. The pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve can be remotely located up to 10 feet from the actuating button and is ideally suited for small chase areas. Air-Control valves are provided with a stainless steel strainer, a brass integral checkstop and conforms with the lead-free requirements of NSF61, Section 9, 1997; Federal Public Law 111-380 and ADA requirements. The -BRS Brass Valve Body option is also available with the 24V solenoid operated valves.

Valve Specifications:

Minimum/Maximum Pressure: 30/100 PSI
Maximum Water Temperature: 130° F / 54° C

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

