




## Option -PPZ

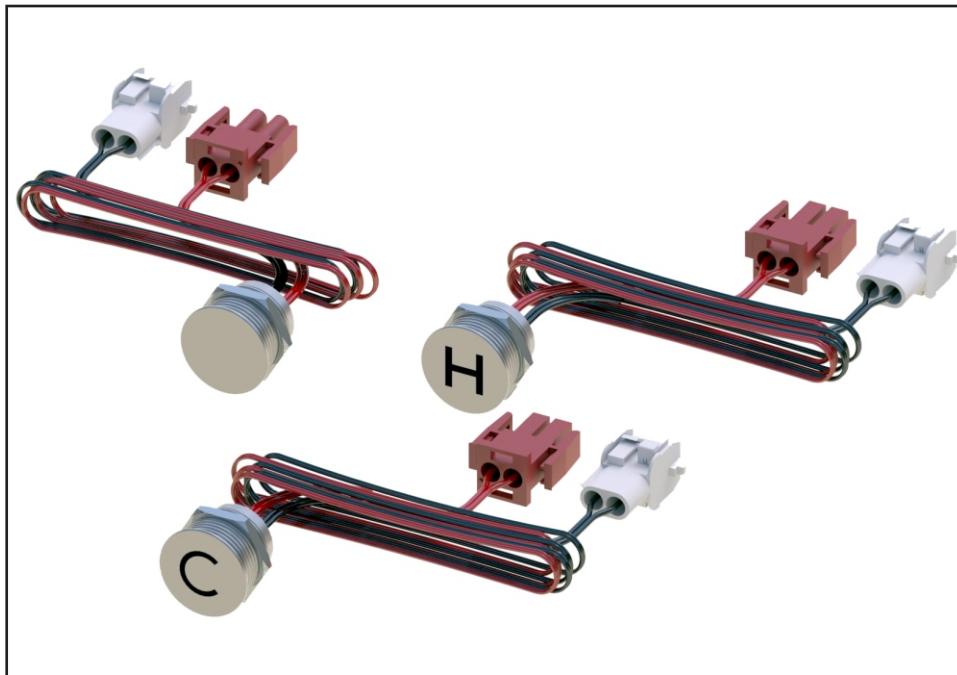

**Programmable Piezo Button** -Programmable Piezo button(s) with 10 foot connection leads are operated by touching the piezo button to activate a 9VDC solenoid-operated valve. Button(s) have a default eight second metered flow, but can be programmed for additional time on site. Programmable Piezo Buttons include a cycle interrupt feature and flow cycles can be stopped by touching the Piezo button anytime before the flow cycle ends. Button(s) fit standard Air-Control punching, do not require a separate controller and are powered by 9VDC transformer or 6AA battery pack provided (batteries not included). Not available for flush valve applications.

- -PPZ Single Temperature: Intended for use by fixtures such as showers, group hand wash basins or washfountains that are provided a point of use ASSE 1069 (showers) or ASSE 1070 (hand wash) tempering valve or available with the S/T Single Temperature valve option (tempering by others). i.e. Shower-Ware showers, Wash-Ware & Meridian Wash Basins
- -PPZ1 Single Temperature: intended for those fixtures that do not include a mixing valve but are available with a single temperature -03M valve option. i.e. Penal-Ware & Dura-Ware, Combys and Lavatories
- -PPZ2 Hot & Cold: intended for those fixtures that do not include a mixing valve but are available with the dual, hot and cold, -04M valve options. i.e. Penal-Ware & Dura-Ware, Combys and Lavatories.

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

