




Shower-Ware® 130 Series Acme Type 3 Back-to-Back Showers

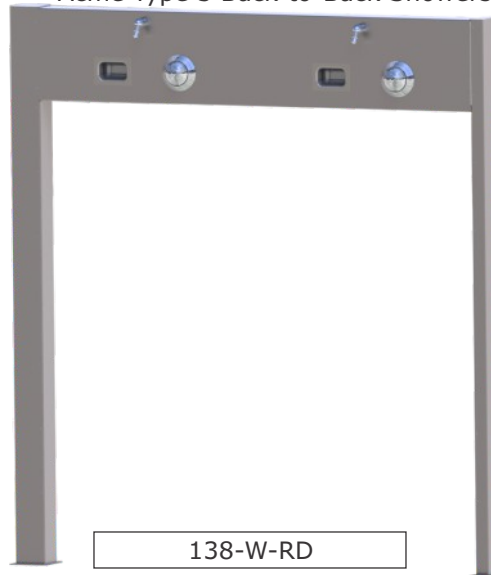

CONTROLS
INSIDE

138-W-RD
Fixture May Show Some Available Options

• Patented D697,591
• © Acorn Engineering Co.

Please visit www.acorneng.com for most current specifications.

Acme Type 3 Back-to-Back Showers

Housing is 16 gage, type 304 stainless steel with satin finish. Shower modules are no more than 10 feet long for ease of maneuvering through corridors and doors. Cage nuts permitting plus or minus 1" horizontal adjustment are provided in housing. Room layout drawings are provided from the factory with each project for customer approval.

Supply Piping is "L" copper tubing and bronze or wrought copper fittings. Showerhead riser and valve supply inlet piping may differ. Supply stub out is sized to provide adequate water to each head simultaneously. Piping is hydrostatically tested at 150 PSI.

Control Valve type is indicated by selected Acme model number. All valves have replaceable cartridges which contain all wearing parts and are serviced from the face of the shower for easy maintenance. Valve is tamper-resistant with an easy to close mechanism and low leverage handle to protect the operating parts from excessive torque.

Showerheads are solid brass, triple chrome-plated and include built-in 1.6 GPM flow restrictor. The Acorn Logan Wizard Showerhead design provides self-cleaning with every use, and has an adjustable spray pattern from a coarse stream to a fine mist.

End Caps and connecting components are heavy gage stainless steel. Each component is pre-punched to accept tamper-resistant fasteners.

Fasteners. Acorn furnishes all exposed tamper-resistant fasteners necessary to complete the on-site shower assembly; however, concealed wall fasteners or anchor shields are not furnished.

GUIDE SPECIFICATION

Provide and install Acorn Acme Back-to-Back Showers (specify model number and options). Housing and end caps shall be 16 gage, type 304 stainless steel with satin finish. Showerheads shall be Acorn Logan Wizard with adjustable spray from a coarse stream to a fine mist. Showers shall be pre-piped and hydrostatically factory tested at 150 PSI. Installation shall be made in accordance with manufacturer's recommendations and details.

Shower-Ware®: 130 Acme Type 3 Back-to-Back Showers



Showerhead Discharge Height (Not Part of Model Number)

6'-0" 5'-6" 5'-0" Other (Specify) _____

MODEL NUMBER AND OPTIONS SELECTION

SERIES (Must Specify)

1 Acme

TYPE (Must Specify)

-3 Back-to-Back Showers

VALVE (Must Specify)

- 0 Electronic Valves, Single-Temp Metering (Specify Type Where Indicated)
- 6 Air-Control, Single Temperature Metering
- 8 T/P Temperature-Pressure Balancing Mixing Valve With Patented Ligature Resistant Tri-Lever Handle (ASSE 1016 Compliant)
- 9 Without Valves (Valves by Others)

ELECTRONIC VALVE SELECTION

Master-Trol® (Electronic)

- EVS1 Single Temp
- EVSP1 Single Temp, Piezo Button

Master-Trol® PLUS (Electronic)

- MTP1 Single Temp
- MTPP1 Single Temp, Piezo Button

Time-Trol® (Electronic)

- MVC1 Single Temp

Programmable (Electronic) w/9VDC Plug-In Transformer

- PPZ1 Single Temp Programmable Piezo Button

SUPPLY (Must Specify)

- T Top
- W Wall

VALVE OPTIONS

- CI Cycle Interrupt for Time-Trol Valves
- LVR Lever Handle (-8 Valves)
- MV Metering Valve in Riser (Air-Control)
- PBH Hemispherical Pushbutton
- TF Transformer, 120VAC to 24VAC (-MVC option only)



SHOWERHEAD OPTIONS

- CSH Conical Showerhead (Ligature Resistant) Flow Control
- F 2.0 GPM (Not Available For Use in California)
- FX Hand Shower With 60" Stainless Steel Hose (In Lieu of Conventional Showerhead)
- QD Quick Disconnect
- POS-QD w/ Positive Shut Off
- MSH Multi-Stream Showerhead
- P Penal Showerhead
- WS Without Showerhead
- Y Universal Ball Joint
- YY Lockable Universal Ball Joint

PRODUCT OPTIONS

- BS Built-in Liquid Soap System
- D Soap Dish
- EG Enviro-Glaze, Specify Color: _____
- FG 14 Gage Material Construction
- MS Modular Privacy Compartments (See Diana Privacy Tab)
- RD Recessed Soap Dish
- SA Splash Panels
- SC Supply Cover, Ceiling Height _____

Please visit www.acorneng.com for most current specifications.

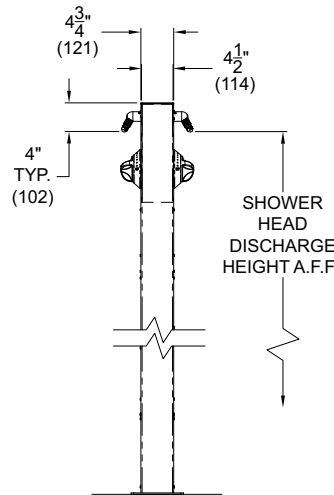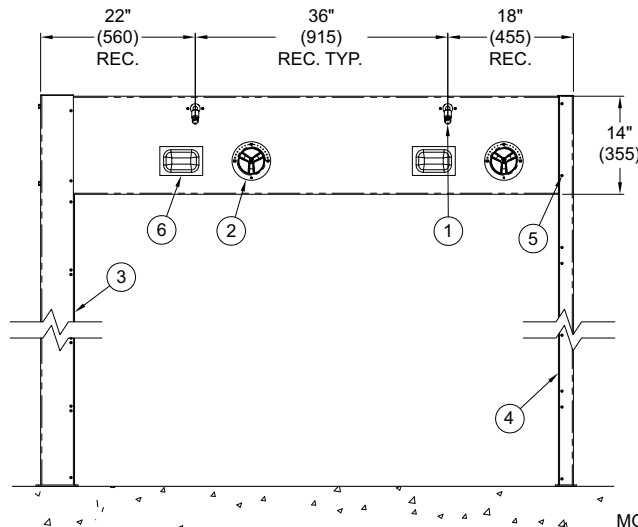

NOTES:

1. Showerhead
2. T/P Valve w/ Standard Patented Tri-Lever Handle
3. Wide Stainless Steel Stanchion
4. Narrow Stainless Steel Stanchion
5. Tamper Resistant Fasteners
6. Optional Recessed Soap Dish

MODEL# 138-W-RD

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>