

Penal-Ware® 1741ADAFA Series

Penal-Pak Wall Shower, Front Access - ADA Compliant





1741-ADA-FA-8MV-FH

Fixture May Show Some Available Options

Please visit **www.acorneng.com** for most current specifications.

Penal-Pak Wall Shower, Front Access - ADA Compliant

Shower is designed to be installed on a finished wall and serviced through removable Front Panel. Mounting Frame is provided. Fixture is fabricated from 14 gauge, type 304 stainless steel and the exterior has a #4 satin finish. Unit conforms with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

NOTE: Not intended for use in California.

Showerhead. There are two Heads provided:

- 1. The Fixed Head is vandal-resistant. The spray pattern can only be changed by the use of an Allen Wrench inserted through the Nozzle.
- 2. The Handheld Shower includes a 60" long, stainless steel Hose, Hand Spray, Vacuum Breaker, Quick-Disconnect and Mounting Bracket. Unit is optionally available with suffix option -FH Fixed Head mounted at 48" in lieu of Handheld Shower.

Valves (ADA compliant) available are:

- 1. Air-Control pneumatically operated, Pushbutton Valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds of force to activate Valve. Timing is from 5 to 60 seconds. Air-Control Valves can be remotely located up to 10 feet from the operating Pushbuttons.
- 2. Electronic Valve System using Modular Valve Controller for water metering through precise electronic control of a Solenoid Valve. Valve timing is from 1 second to 9 minutes. Modular Valve Controller can be remotely located up to 100 feet from the operating pushbutton.

Regularly furnished items include an ADA compliant Control Valve, a Showerhead, a Handheld Shower with Quick-Disconnect and Mounting Bracket, a Recessed Soap Dish, Mounting Frame and Hardware. Grab Bar and Folding Seat by others.

GUIDE SPECIFICATION


Provide and install an Acorn Penal-Ware, ADA Compliant, Front Access Wall Shower (specify model number and options). Shower Panel shall be fabricated from 14 gauge, type 304 stainless steel and shall have a #4 satin finish. Exposed trim shall be chrome-plated brass. Fixture shall be furnished with a fixed Showerhead, a Handheld Shower with Vacuum Breaker, Quick-Disconnect and Mounting Bracket. Shower shall be provided with an ADA compliant Control Valve. A stainless steel recessed Soap Dish shall be factory installed. Fixture shall be provided with necessary fasteners for proper installation. Units to conform with ANSI, UFAS and ADA requirements for accessibility.

Page 1 P.1741ADAFA Revised: 10/05/23

|--|

Penal-W	Vare®: 1741ADAFA Penal-Pak Wall Show	wer, Front	t Access - ADA Compliant		
WALL THICKNESS AND TYPE (Must Specify) Thickness: Type: ☐ Concrete ☐ Block ☐ Steel MODEL NUMBER AND OPTIONS SELECTION			VALVE SELECTION (Continued) Time-Trol® (Electronic) MVC1 Single TempMVC2 Hot & Cold		
BASE MODEL NUMBER ☑ 1741-ADA-FA Penal-Pak Wall Shower - ADA Compliant - Front Access		-PPZ1	grammable (Electronic) w/9VDC Plug-In Transformer PZ1 Single Temp Programmable Piezo Button PZ2 Hot & Cold Programmable Piezo Buttons		
VALVE SELECTION Air-Control (Pneumatic) □ -03-M-MA2 Manifolded, Single Temp, Metering □ -04-M-MA2 Manifolded, Hot & Cold, Metering		Valve By ☐ -9	Others Punched for Valve by Others		
		VALVE OPTIONS			
T/P Mixing Valve (SV16) ☐ -8MV ASSE 1016 Compliant T/P Temperature/		 □ -BRS Brass Body Valve □ -PBH Hemispherical Pushbutton (Pneumatic Only) □ -TF Transformer, 120VAC to 24VAC (-MVC option or 			
	Pressure Balancing Mixing Valve & Patented ADA Compliant Ligature Resistant Tri-Lever Handle w/ Single-Temp Metering Air-control Valve	SHOWER -CSH -F	HEAD OPTIONS Conical Shower Head Flow Control		
Master-Tro ☐ -EVS1 ☐ -EVS2 ☐ -EVSP1 ☐ -EVSP2] -EVS2 Hot & Cold] -EVSP1 Single Temp, Piezo Button		☐ 2.0 GPM (Not Available For Use in California) Fixed Head at 48" in Lieu of Handheld Shower Penal Showerhead w/Lockable Universal Ball Joint Penal Showerhead w/Lockable Up/Down Ball Joint Space Saver Showerhead 20° Discharge		
☐ -EVSP2 Hot & Cold, Piezo Buttons Master-Trol® PLUS (Electronic) ☐ -MTP1 Single Temp ☐ -MTP2 Hot & Cold ☐ -MTPP1 Single Temp, Piezo Button ☐ -MTPP2 Hot & Cold, Piezo Buttons		PRODUCT OPTIONS			
		☐ -EG Enviro-Glaze, Specify Color: ☐ -LRD Less Recessed Soap Dish ☐ -ST7069 Mixing Valve Assy (Do Not Use for -8, -8MV)			

Please visit <u>www.acorneng.com</u> for most current specifications.

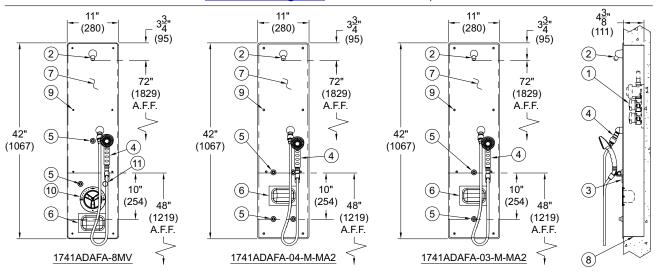

NOTES:

- 1. -03-M-MA2 MANIFOLDED AIR-CONTROL VALVE, SHOWN
- 2. PENAL SHOWER HEAD
- 3. HANDHELD SHOWER MOUNTING BRACKET
- 4. HANDHELD SHOWER WITH QUICK DISCONNECT
- 5. CONTROL VALVE PUSHBUTTONS
- 6. RECESSED SOAP DISH

- 7. SHOWER PANEL
- 8. WALL MOUNTING FRAME
- 9. TAMPER RESISTANT SCREWS
- 10. OPTIONAL -8 TEMP/PRESSURE BALANCING VALVE w/ ADA COMPLIANT TRI-LEVER HANDLE
- 11. BLANK PUSHBUTTON

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.go						
Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. ubject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2007 Acorn Engineering Company						
Selection Summary	Approved for Manufacturing					
. & Option	CompanyTitle					

Selection Summary	Approved for Manufacturing		
Model No. & Option	Company	Title	
Quantity	Signature	Date	

Page 2 P.1741ADAFA Revised: 10/05/23