



Meridian® 2140 Series Blowout Jet Toilet - Wall Outlet



2140-W-2-RM

Fixture May Show Some Available Options



Please visit www.acorneng.com for most current specifications.

Blowout Jet Toilet

Meridian® Toilet contoured Housing features an attractive, satin finish and optionally available with a High Polish Finish (-HP) for an exceptional, elegant appearance. The standard Toilet Bowl has a matte finish on the inside. Mounting is available for front or rear installations. Unit includes punching for an elongated Hinged Seat. (-HS Hinged Seat is optionally available.) Housing includes Access Panel on each side for installation of fixture and Hinged Seat.

Toilet is a Blowout Jet type with an elongated Bowl manufactured to ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.28 GPF. P-Trap has a minimum 3-1/2" Seal and will pass a 2-1/8" Ball and is fully enclosed.

Flush Valve supply is available for exposed or concealed Flush Valve styles with 1-1/2" NPT connection.

Front Mount (-FM) unit includes a fixture-to-wall Mounting Plate with exposed vandal-resistant fasteners. Mounting Plate is mounted directly to a reinforced wall or to an optional -MC Mounting Carrier (6" bolt centers). Waste Outlet connection for Front Mount (-FM) unit is 5-1/2" diameter recessed Gasket Flange.

Rear Mount (-RM) unit includes integral 1/2" UNC Anchor Tappings and mounting hardware. Unit requires an accessible pipe chase for installation. Waste Outlet connection for Rear Mount (-RM) unit is a 2-3/8" OD stainless steel plain end.

GUIDE SPECIFICATION

Acorn Meridian® Blowout Jet Toilet (specify model number and options). Fixture to be heavy gage type 304 stainless steel. Exposed surfaces shall be polished to a satin finish. Housing to include side Access Panels and punching for Hinged Seat. Toilet shall meet ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.28 GPF. Toilet P-Trap shall have a minimum 3-1/2" Seal that shall pass a 2-1/8" diameter Ball and be fully enclosed.



Meridian®: 2140 Blowout Jet Toilet - Wall Outlet

WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: Concrete Block Steel

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

2140 Blowout Jet Toilet

SUPPLY SELECTION (Must Specify)

-T Top (Exposed)
 -W Wall (Concealed)

FIXTURE MOUNTING & WASTE (Must Specify)

-1 Off-Floor, Wall Outlet
 -2 On-Floor, Wall Outlet

INSTALLATION (Must Specify)

-FM Front Mount
 -RM Rear Mount

FLUSH VALVE GPFs (Must Specify)

-1.28 GPF (HET)
 -1.6 GPF (Not Available in California)
 -3.5 GPF (Not Available in California)

FLUSH VALVE OPTIONS (Must Specify)

REFER TO ACORN DURA-WARE ACCESSORIES FOR FLUSH VALVE COVER #2802, BOX #2803-1 AND PANEL #2898

-FV Flush Valve, Mechanical (N/A for ADA)
 -FVBO Flush Valve by Other
 -FVH Flush Valve, Hydraulic (N/A for Top Supply)
 -FVL Flush Valve, ADA Lever Handle
 -MVCFV Time-Trol Flush Valve (N/A for Top Supply)

TOILET SEAT OPTIONS

-HS-OFLC Hinged Seat, Open Front Less Cover
 -HS-OFWC Hinged Seat With Cover
 -LPFS Less Punch for Hinged Seat


TOILET OPTIONS

-CO1 Cleanout with O-Ring to No-Hub 2-3/8" x 4" (-RM Models Only)
 -CO1_3 Cleanout with O-Ring to No-Hub 2-3/8" x 3" (-RM Models Only)
 -FVT Flush Thru Wall Connector
 -GW Gasket Waste (Standard on-FM but Optional on -RM)

PRODUCT OPTIONS

-ADA 18" Integral Seat Height
 -BL Bedpan Lugs
 -EG Enviro-Glaze Color Specify: _____
 Toilet Interior & Exterior
 -EGE Enviro-Glaze Color Specify: _____
 Toilet Exterior Only
 -FG 14 Gage Housing
 -HP High Polish Finish (Exterior Only)
 -MC Mounting Carrier (6" Bolt Centers) (-FM Models Only)
 -MT Metal Template
 -SW Wall Sleeve (-RM Models Only)
 -TF Transformer, 120VAC to 24VAC (-MVCFV option)

Please visit www.acorneng.com for most current specifications.

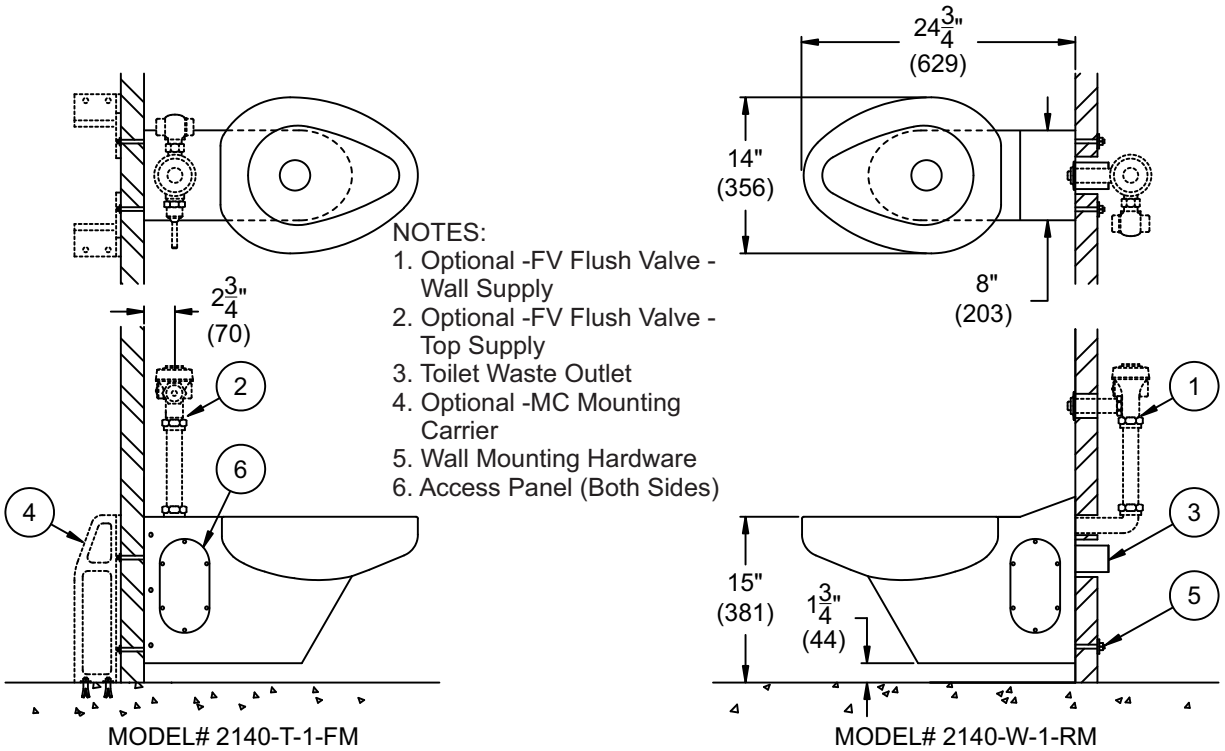

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>