



# Replace-Ware: 3382


## Air-Control Replacement Valve Assembly - China/Aluminum Fixtures

The Air-Control Valve Assembly is designed to replace existing valves on china and aluminum fixtures with an integral bubbler. The Air-Control valve assembly allows locating the valve up to 10 feet away from the activating pushbuttons. The pushbutton assembly is arranged to be mounted to the backsplash and support the fixture. Pushbuttons require minimum 1-5/16" diameter round or 1-1/8" square backsplash openings. When single temperature is required, a blank escutcheon is provided to maintain this feature. The integral spout expanded rubber connection will fit 15/16" through 1-1/8" diameter openings. Valve inlets are 1/2" NPT.

Valve is an Air-Control pneumatically operated, pushbutton valve using atmospheric air. Pushbutton is vandal-resistant and requires less than 5 pounds to activate valve. Valve is direct acting, non-metering type and is optionally available as metering with non-hold open feature. Metering valve timing is adjustable from 5 to 60 seconds. Valve includes a 0.5 GPM flow control and can be remotely located up to 10 feet from the operating pushbutton. Valve conforms with lead free requirements for NSF61, Section 9, 1997 and CHSC 116875.

Regularly furnished items include a 0.5 GPM flow control, hot and cold indexed pushbuttons, pushrods and bubbler connection.

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

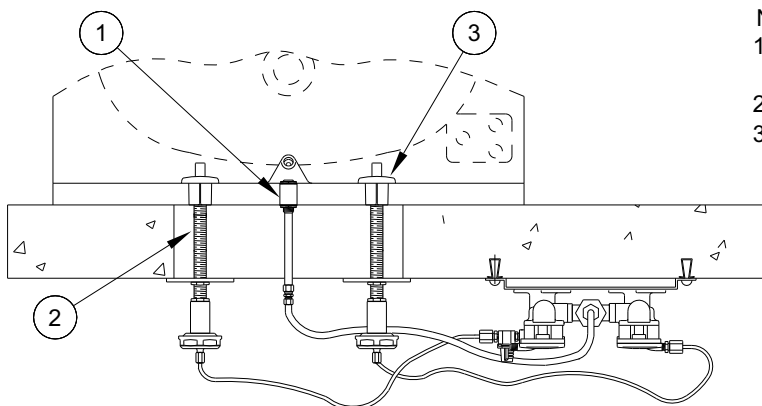

3383-MH

### NOTES:

- 1. Expanded Rubber Gasket Connection for Integral Spout
- 2. Pushbutton and Anchoring Assembly
- 3. Escutcheon - 1-15/16" Diameter

### WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

### MODEL NUMBER AND OPTIONS SELECTION


#### BASE MODEL NUMBER

- 3382 Air-Control Valve Assembly -Replacement, Single Temp
- 3383 Air-Control Valve Assembly -Replacement, H & C


### PRODUCT OPTIONS (Must Specify)

(See Penal-Ware® Model Numbers & Options Section)


- BRS Brass Body Valve(s)
- M Metering
- MA Manifolded Valve  2  3  4
- MH Metering Hot Side Only

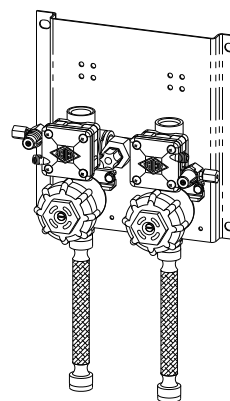


3383-M

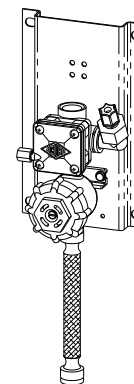

3382



3383-BRS-M



3382-BRS

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>