



## INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.



ELSC1-SW000-F60

(Photo shows optional accessories)



ELSC2-SW000-F60

(Photo shows optional accessories)



### IMPORTANT

Important: Some options may slightly alter installation. To ensure proper installation review the manual thoroughly and verify rough-ins before beginning any work. File this manual with the owner or maintenance personnel upon completion of installation.

Industry standard wall backing, for wall hung fixtures, is required. Installer provided wall anchors and wall anchoring hardware must be appropriate for wall construction.

ANSI, UFAS or ADA compliance is subject to the interpretation and requirements of the local code authority and is the responsibility of the installer for verification.

Single Temp Valve Assembly: Recommended working water pressure is 30 psi (2.07 bars) minimum to 100 psi (6.89 bars) maximum. Maximum temperature is 130°F (54.4°C). Maximum outlet temperature recommended is 105°F (40.6°C). Valve assembly must be drained prior to being subjected to freezing temperatures. A checkstop is provided with this valve assembly.

T/P Mixing Valve Assembly: Recommended working water pressure is 30 psi (2.07 bars) minimum to 100 psi (6.89 bars) maximum. Maximum hot water temperature is 180°F (82°C). Temperature adjustment range is 85-115°F (29-46°C). Minimum hot water supply temperature must be 5°F (3°C) above desired set temperature. Valve assembly must be drained prior to being subjected to freezing temperatures. The valve assembly has checks integral to the inlets however, angle stops are to be provided by the installer.

Prior to installation, supply lines must be flushed of all foreign material such as pipe dope, chips, or solder. Debris or foreign material in water supply may damage valve.

Teflon tape is recommended on all threaded waste and supply connections to reduce the possibility of leaks.

Provide 110-120VAC/60Hz/3A (MAX) electrical receptacle for factory supplied 120VAC/9VDC, 100mA plug-in transformer.





NOTE: Receptacle(s) must be wired to a GFCI protected circuit. Fixture must be earth grounded per N.E.C. (National Electrical Code).



# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

## ACCESSIBILITY COMPARISONS

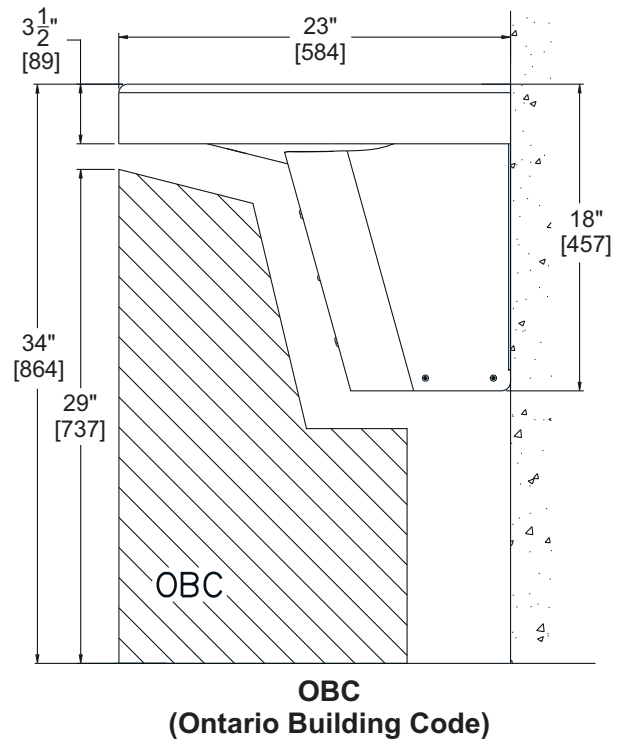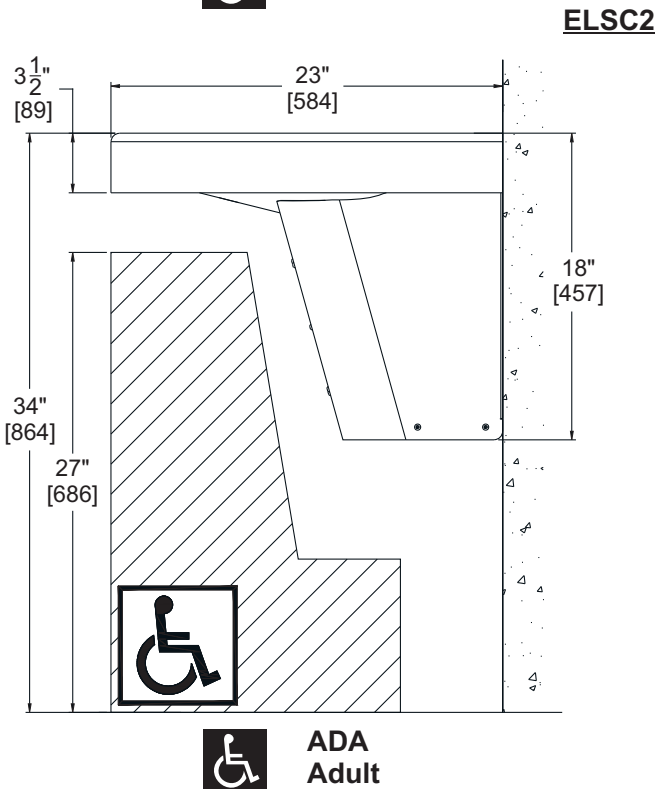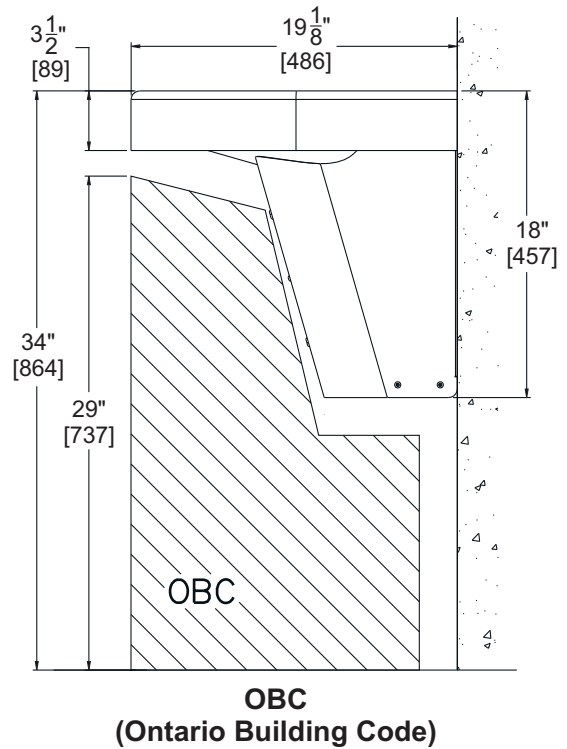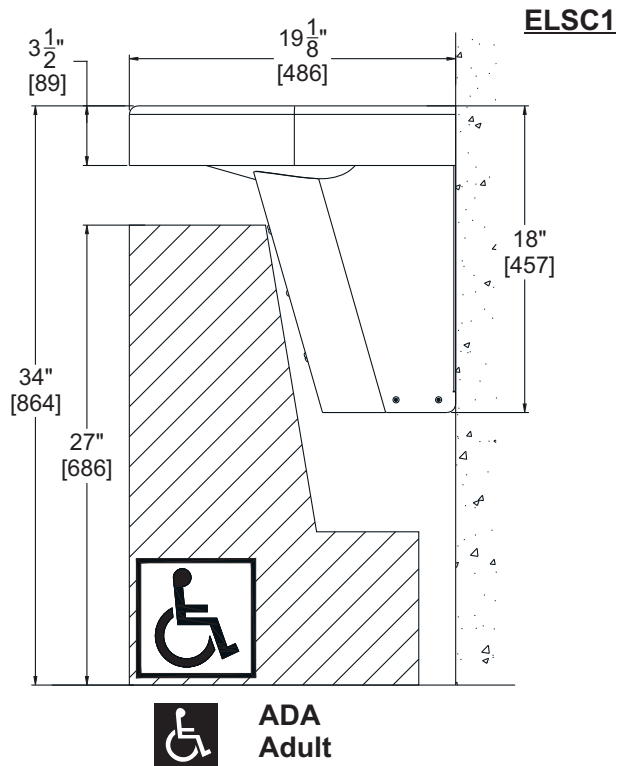




# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

## ELSC1 ROUGH-IN DIMENSIONS -ADA

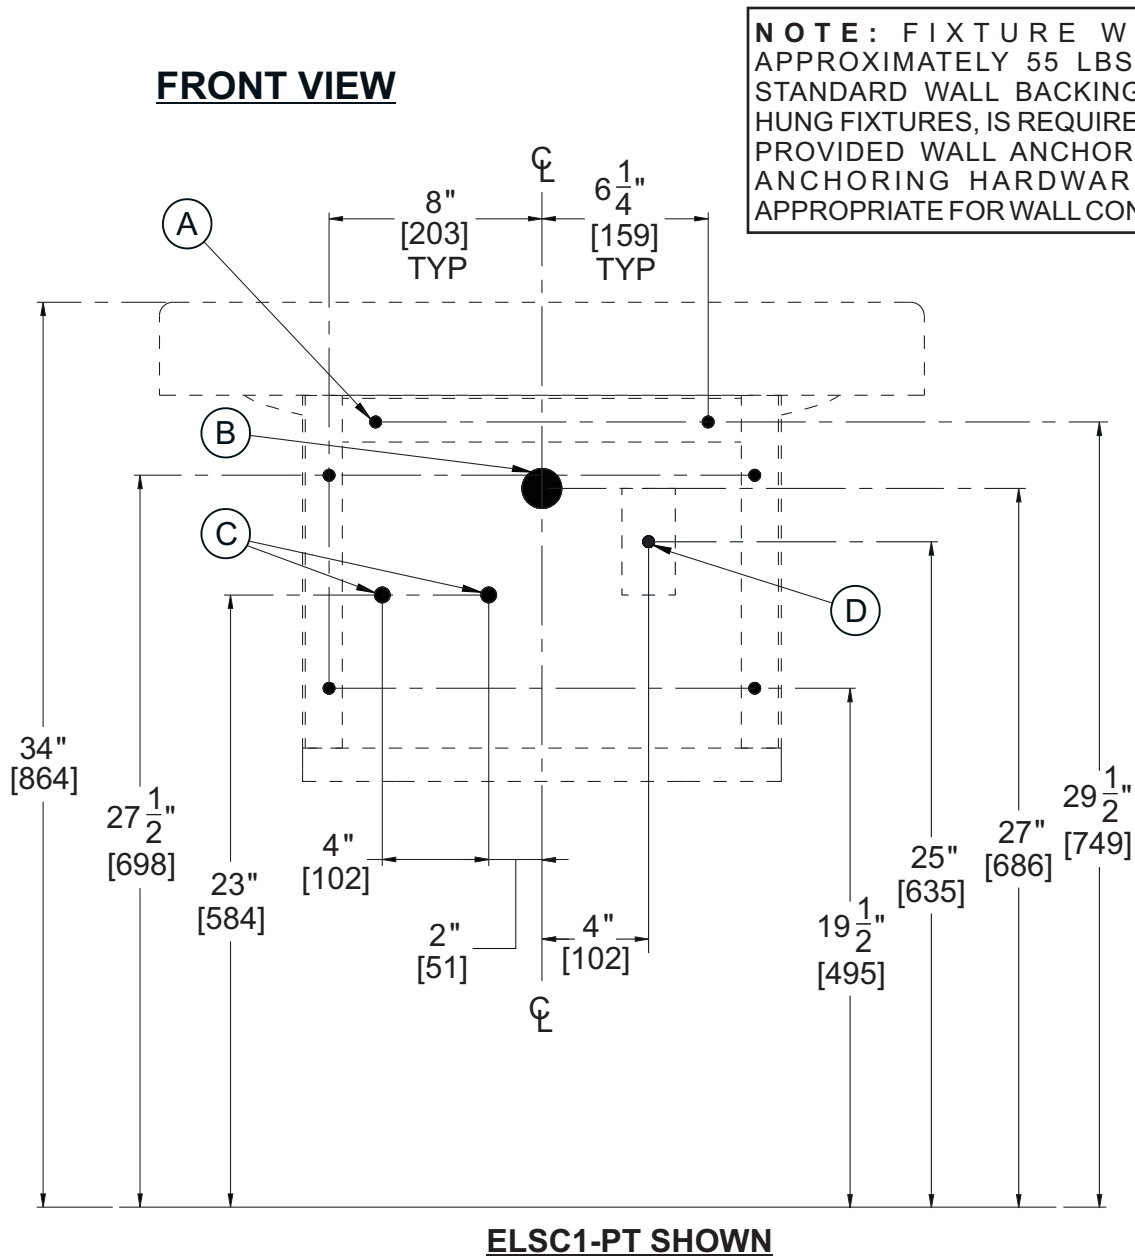

- (A) Ø7/16" Mounting Points (6) Places.
- (B) 1-1/2" O.D. P-Trap Waste Outlet.
- (C) 1/2" NPS Hot & Cold Supplies, Rough-In as required (Angle Stops by others).
- (D) When required for Sensor Faucet 120VAC, 60Hz, 3A (Max) GFCI Protected Electrical Receptacle.




# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

## ELSC2 ROUGH-IN DIMENSIONS -ADA

### FRONT VIEW

**NOTE:** FIXTURE WEIGHT IS APPROXIMATELY 90 LBS (INDUSTRY STANDARD WALL BACKING, FOR WALL HUNG FIXTURES, IS REQUIRED. INSTALLER PROVIDED WALL ANCHORS AND WALL ANCHORING HARDWARE MUST BE APPROPRIATE FOR WALL CONSTRUCTION)

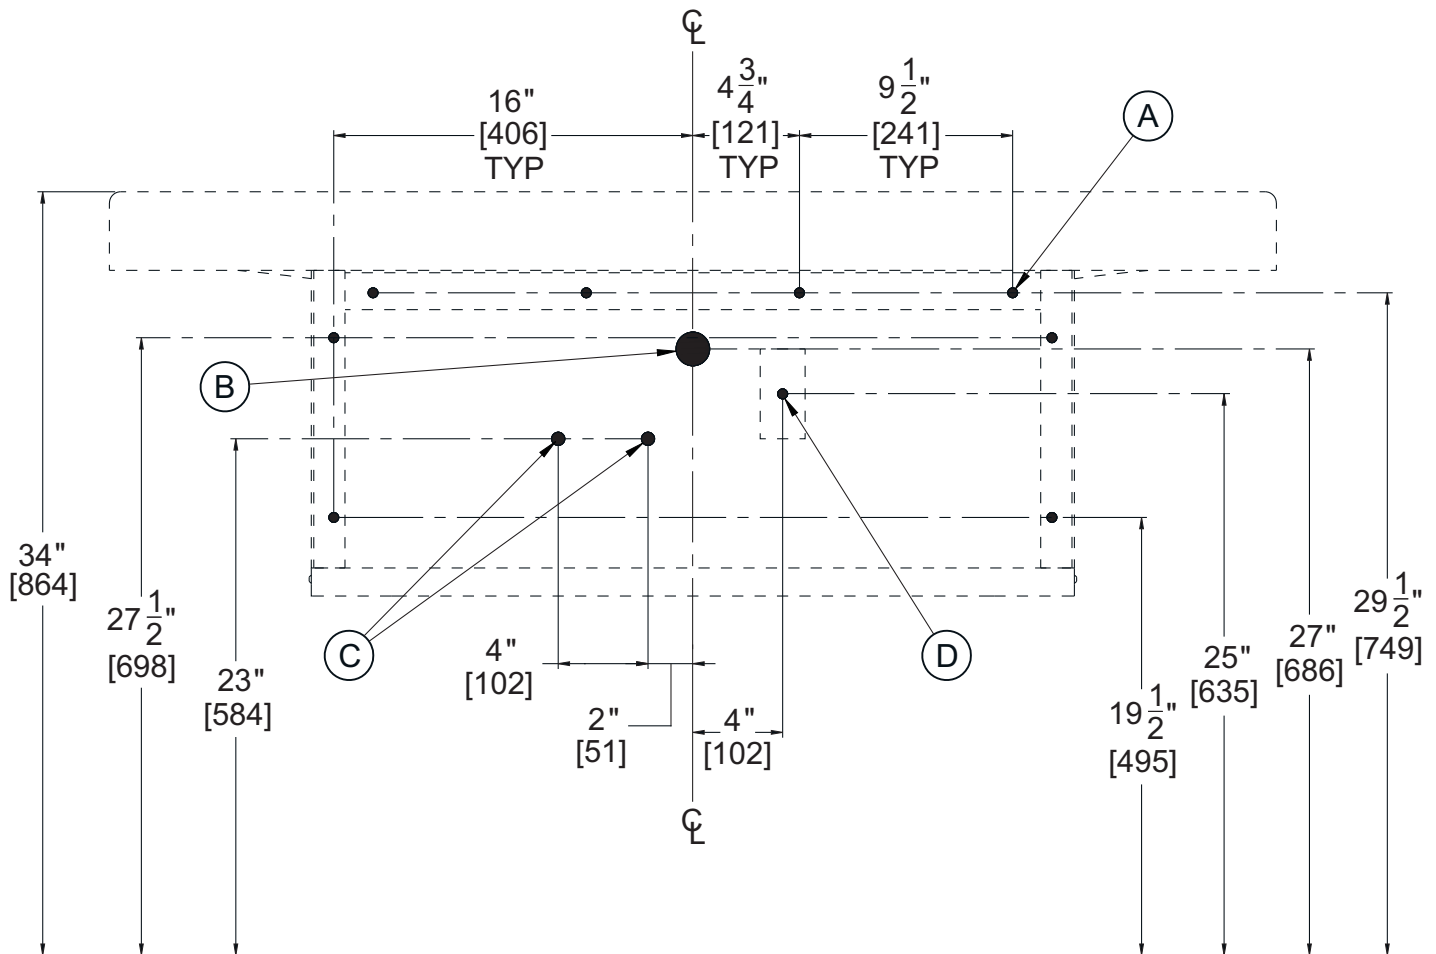

### ELSC2-PT SHOWN

- (A) Ø7/16" Mounting Points (8) Places.
- (B) 1-1/2" O.D. P-Trap Waste Outlet.
- (C) 1/2" NPS Hot & Cold Supplies, Rough-In as required (Angle Stops by others).
- (D) When required for Sensor Faucet 120VAC, 60Hz, 3A (Max) GFCI Protected Electrical Receptacle.




# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.


## FIXTURE ANCHORING

- 1** Remove Basin and Access Panel/Fasteners from Trap Assembly and set aside in safe location.

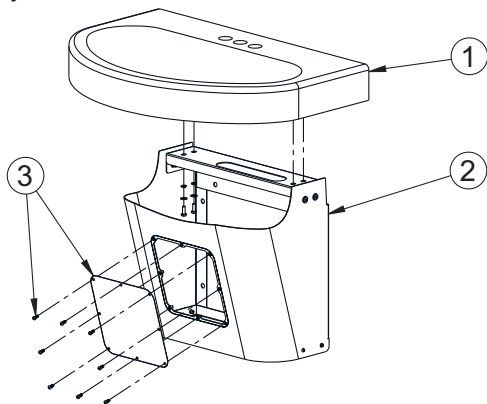

- ① Basin
- ② Trap Assembly
- ③ Access Panel and Fasteners (Provided)

- 2** Mark, level and mount Trap Assembly using Wall Anchoring Hardware provided by others.

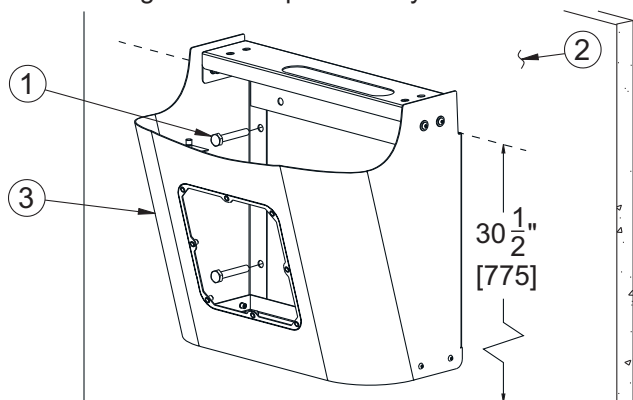


- ① Wall Anchoring Hardware by others
- ② Finished Wall
- ③ Trap Assembly



**NOTE:** It is recommended to **ONLY** anchor the four lower mounting points at this step of installation.

- 3** Remove Basin Support Bracket/Hardware from Trap Enclosure and set aside in safe location.

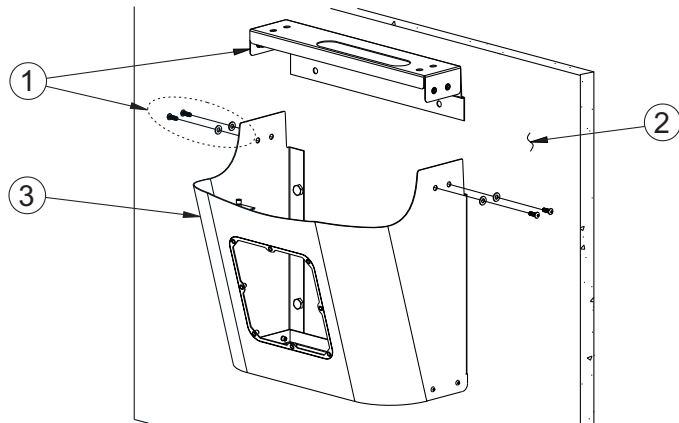

- ① Basin Support Bracket and Hardware
- ② Finished Wall
- ③ Trap Enclosure




# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

## FIXTURE ANCHORING

**4** Install Basin Support Bracket onto Basin using provided hardware.

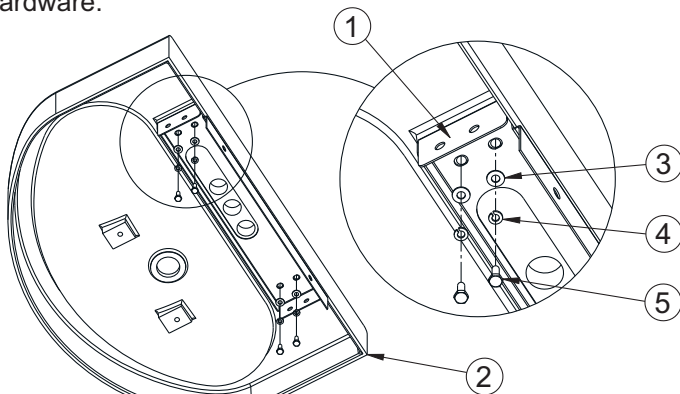


- ① Basin Support Bracket
- ② Basin
- ③ Flat Washer (Provided)
- ④ Lock Washer (Provided)
- ⑤ Hex Screw (Provided)




**NOTE:** It may be advantageous to install to the deck, faucets, soap dispensers or other accessories prior to wall mounting.

**5** Install Basin/Basin Support Bracket onto Trap Enclosure.

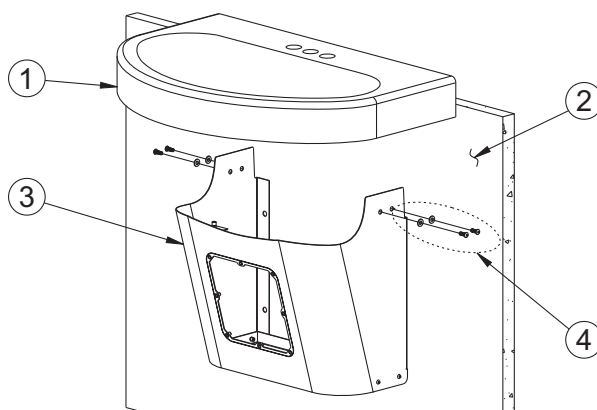

- ① Basin/Basin Support Bracket
- ② Finished Wall
- ③ Trap Enclosure
- ④ Basin Support Bracket Hardware (Provided)

**6** Secure Basin to Trap Enclosure using provided hardware.

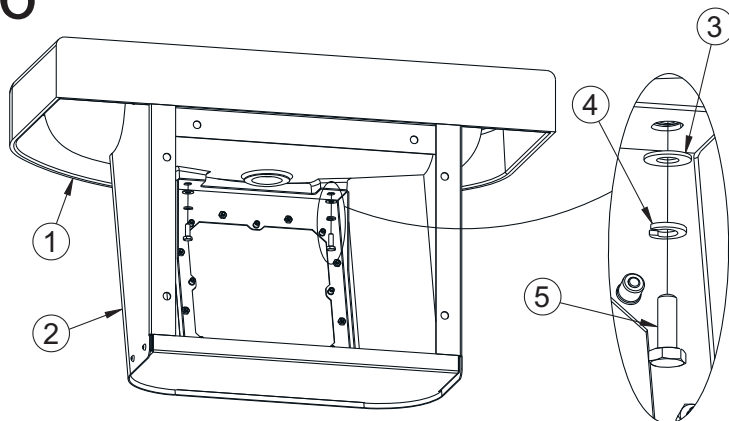

- ① Basin
- ② Trap Enclosure
- ③ Flat Washer (Provided)
- ④ Lock Washer (Provided)
- ⑤ Hex Screw (Provided)




# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

## WASTE ASSEMBLY

### 7 Secure Basin/ Basin Support Bracket to Finished Wall.

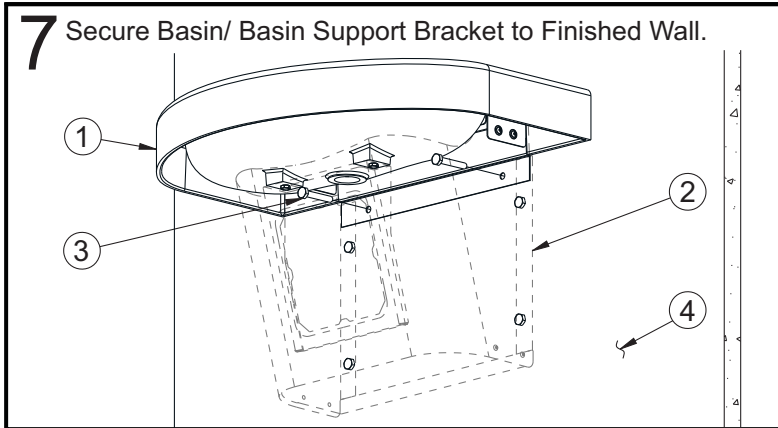


- ① Basin
- ② Trap Enclosure (Shown Phantom for Reference)
- ③ Wall Anchoring Hardware provided by others
- ④ Finished Wall

- ① Basin Assembly
- ② P-Trap Assembly (Optional)




**HINT:** Teflon tape is recommended on all threaded waste and supply connections.

### 8 Install Optional P-Trap through the Access Panel Opening on the front side of unit.

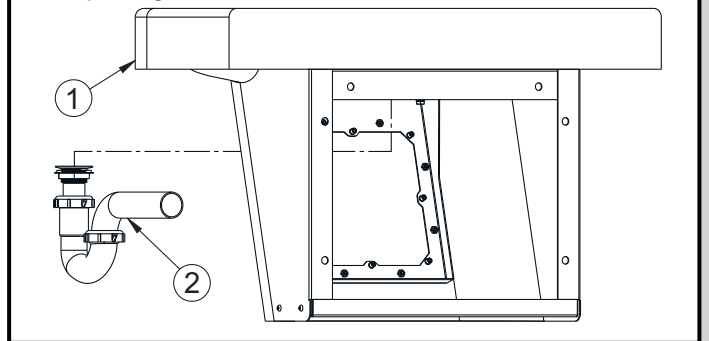

### 9 Install Drain Strainer to Basin using plumbers putty on underside of grid strainer flange. From beneath Basin, assemble Rubber Gasket, Washer and Flange Nut as shown to Strainer and tighten securely.

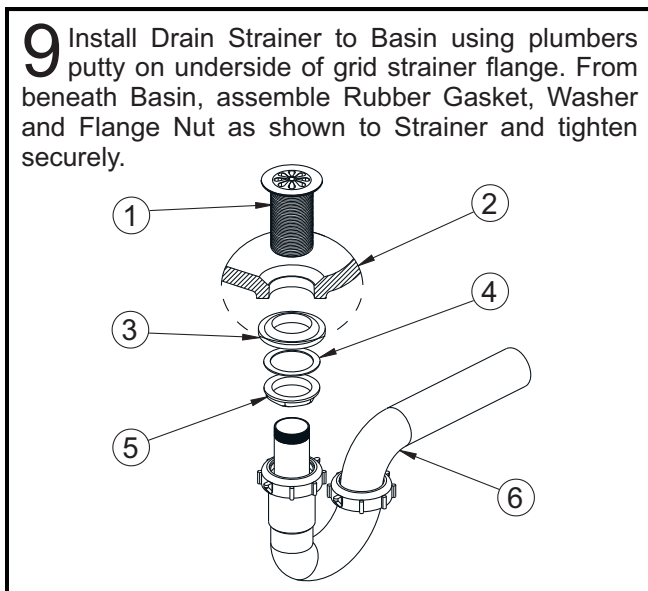

- ① Drain Strainer
- ② Basin
- ③ Rubber Gasket
- ④ Fiber Washer
- ⑤ Flange Nut
- ⑥ 1-1/2" x 1-1/4" P-Trap



### IMPORTANT

Upon completion of all plumbing connections, check for water leaks in supply lines and waste water piping.

### 10 Reinstall set aside Access Panel with previously set aside Fasteners (Provided).





# INSTALLATION, OPERATIONS & MAINTENANCE MANUAL

Please visit [www.acorneng.com](http://www.acorneng.com)  
for most current specifications.

## CARE, CLEANING, AND REPAIR OF CORTERRA® SOLID SURFACE

### CORTERRA® SOLID SURFACE

Acorn's densified solid surface material is composed of recycled solid-surface polymer resin, aluminum trihydrate and fillers. It is resistant to stains, impact and burns and complies with ANSI Z124.3. It is attractive, durable and easy to maintain.

#### ROUTINE CLEANING

Corterra® should be kept clean at all times. If maintained, Corterra® surfaces will retain their new, clean appearance indefinitely. Wash with a non-abrasive all purpose cleaner and water, then rinse. Wipe dry. (Never use cleaners with strong chemicals such as toilet bowl cleaners, rust removers, ceramic cook top cleaners, laquer thinners or oven cleaners). To remove persistent stains use a Scotch Brite pad and an abrasive cleaner or a solution of household bleach and water (1 part water to 1 part bleach).

#### REPAIRING SURFACE DAMAGE

Surface damage, such as minor chips, scratches, burn marks and graffiti can be repaired with a fine grit abrasive cleanser, such as a Scotch-Brite pad or fine grit sandpaper. For more serious physical damage caused by vandals, an Acorn Solid Surface Repair Kit is available. Contact the factory for details. Refer to drawing #9927-160-002.

## SOAP SYSTEMS

Acorn soap reservoirs and dispensers provide a dependable operation over long term when proper maintenance is performed and the correct soap is being used. The most common problem with soap systems is that the wrong viscosity (thickness) of soap is being used or high acidic pH levels are in the ingredients. Soap thickness can be best explained as no thicker or thinner than normal household liquid dish soap. The pH level of the soap should be 6.5 to 8.5; more acidic soaps will corrode the metal parts and degrade rubber or plastic components.

Soap reservoirs and dispensers should be maintained periodically to clear residue. This should be done in hot water to clean the internal components. The valve should be pumped multiple times to thoroughly clean any residue inside. The reservoir and tubing should also be flushed and cleaned with hot water. In cases of extreme clogs, the dispenser should be disassembled and the parts thoroughly cleaned.

**WARNING:** Some soap contains corrosive additives that can cause rust on stainless steel surfaces. Acorn recommends user/ maintenance personnel review MSDS reports of soap and possible corrosive additives noted.

## CARE AND CLEANING OF STAINLESS STEEL SURFACE

### NORMAL CLEANING

Clean weekly or more often, as needed  
(especially high polishing surfaces)

#### RECOMMENDED CLEANING MATERIALS

- Sponge – natural or artificial
- Nylon or other soft-bristle material brush
- Soft cloth (as used on automobile finishes)

### RECOMMENDED CLEANING SOLUTIONS

- Hand dishwashing liquid/soft water solution
- Mild soap/soft water solution
- 3M Stainless Steel Cleaner/Polish
- White vinegar/soft water solution  
(for brightening, removing oil and hard water deposits)
- CLR Brand Cleanser or baking soda/soft water solution (for brightening, removing hard water deposits)
- Club soda and sponge

### FOR HIGH POLISH STAINLESS STEEL

*Note: High polish stainless steel surfaces should never come into contact with any abrasive cleaning brush, cloth or cleaning agent.*

#### To remove smudges and fingerprints:

Wipe surfaces with a quality Stainless Steel Cleaner/Polish. Apply using a soft non-abrasive cloth, wipe surfaces with stainless steel cleaner/polish.

#### To remove rust stains:

Wipe surfaces with CRES (available from Acorn) or equivalent cleaner. Use recommended solutions. Apply using a soft non-abrasive sponge. Rinse surfaces immediately after application. Always follow cleaner product directions provided. Afterwards, using a soft, non-abrasive cloth, wipe surfaces with stainless steel cleaner/polish.

### FOR TOUGH PROBLEMS

- CRES Cleaner specifically for rust stains (available from Acorn)
- Tarn-X for general stains
- #7 chrome polish
- Silver polish

#### To remove stubborn spots or to treat a scratch (Standard Satin Finish Only):

Use of synthetic, abrasive, general-purpose pads such as Scotch Brite is recommended. Apply the stainless steel cleaner/polish to the synthetic, abrasive pads and CAREFULLY rub out spot with cleaner/ polish. Be sure to rub in the direction of the grain! Do not allow steel wool to come in contact with the stainless steel. Steel particles can embed into the stainless steel surface and create rust!

Stainless steel should be kept clean at all times. If maintained, stainless steel surfaces will retain their new, clean, polished appearance indefinitely. To remove water spots or rust spots, stainless steel cleaner/polish on a cloth is recommended.

IF SPOTS ARE STUBBORN OR IF YOU WISH TO TREAT A SCRATCH: synthetic, abrasive, general-purpose pads such as Scotch Brite are recommended. Apply the stainless steel cleaner/polish to the synthetic, abrasive pad and CAREFULLY rub out spot with cleaner/polish. **Be sure to rub in the direction of the grain!** Do not allow steel wool to come in contact with stainless steel. Steel particles can embed into the stainless steel surface and create rust.