



OPTION CSH-WSB




Ligature Resistant WaterSense Flanged Showerhead for Wall Mounting

Ligature and Vandal Resistant Flanged Showerhead with a conical shape. Includes a Removable Vandal Resistant Stainless Steel Non-Aerated Multi-Stream Spray Nozzle fitted with a 1.5 GPM (5.7 LPM) Flow Regulator. Conical Body and Spray Insert are machined from solid type 303 stainless steel and polished to a mirror finish. The conical shape of the Showerhead provides a 30° degree spray angle and prevents it from being used as a ligature point. Showerhead is certified and labeled for WaterSense® Specifications for Showerheads Version 1.1 and complies with requirements listed under ASME A112.18.1 / CSAB125.1. IAPMO cUPC. [Link To Certification](#)

The CSH-WSB Flanged Showerhead is intended for Wall Mounting and includes a 1/2" NPT x O-Ring Adapter, Inlet Connection. Also included is an 8 gage Galvanized Steel Anchor Plate to mount to the finished wall in preparation for mounting the Flanged Showerhead assembly.

Note: This showerhead includes vandal resistant features and WaterSense® certification and is serviceable from the user side of the shower fixture using a specialized tool. Prior evaluation is recommended before using the showerhead in high security applications.

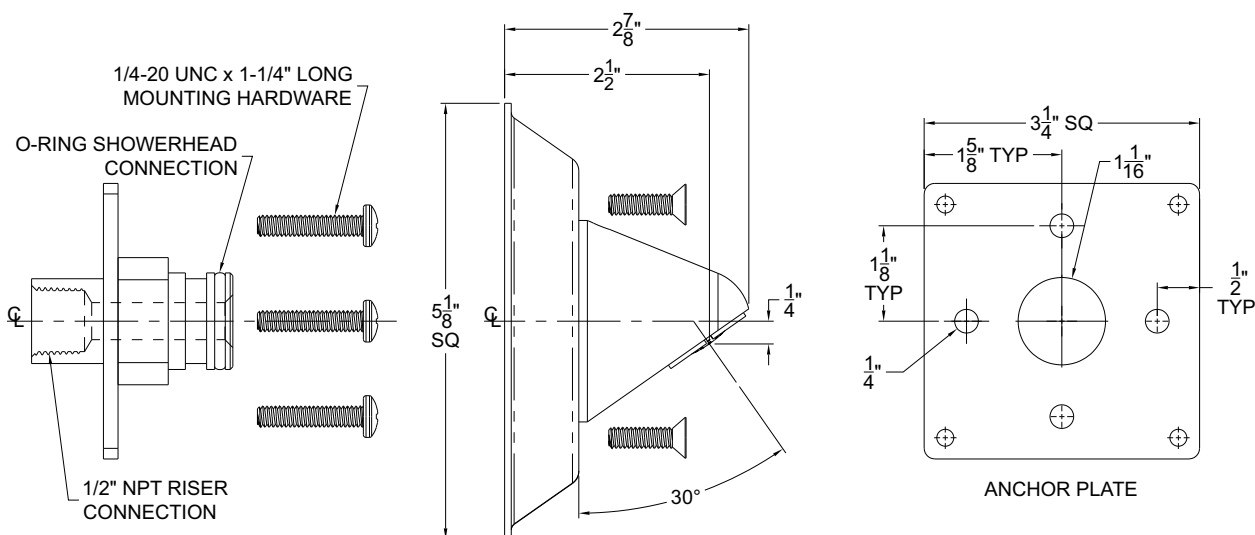

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company

Selection Summary	Approved for Manufacturing
Model No. & Option _____	Company _____ Title _____
Quantity _____	Signature _____ Date _____

CSH-WSB

Rev: 12/04/24