



## Secur-Care® - Ligature Resistant LR1709FG Series

ADA Compliant Ligature Resistant High Efficiency Urinal



LR1709FG-W-1

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### ADA Compliant Ligature Resistant High Efficiency Urinal

**Acorn - Ligature Resistant** High Efficiency Urinals are intended for mounting onto a finished wall from an accessible pipe chase. Engineered to reduce possible risk of the fixture being used as a ligature device. Unit features a contoured interior to facilitate cleaning. Urinals mounted at 17" rim height comply with ANSI, ADA, UFAS accessibility requirements. Compliance is subject to the interpretation and requirements of the local code authority.

**Fixture** bowl and the housing are fabricated of 14 gage type 304 stainless steel type 304 stainless steel with exterior surfaces polished to a satin finish.

**Urinal** is a high efficiency type requiring a 1/8 GPF (0.47 Liters per Flush) to 1/2 GPF (1.8 Liters per Flush) flush valve and supplied with 3/4" NPT flushing inlet connection and 1-1/2" O.D. plain end P-Trap.

### GUIDE SPECIFICATION

Provide Secur-Care® - Ligature Resistant Stainless Steel Urinal (specify model number and options). Urinal mounted at 17" rim height to comply with ANSI, ADA and UFAS accessibility requirements. Interior to have a contoured surface to facilitate cleaning. Fixture shall be fabricated of 14 gage type 304 stainless steel with exposed surfaces polished to a satin finish.



# Secur-Care® - Ligature Resistant LR1709FG

## High Efficiency Ligature Resistant Urinal - ADA Compliant

### WALL THICKNESS AND TYPE

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

### MODEL NUMBER AND OPTIONS SELECTION

#### BASE MODEL NUMBER

LR1709FG High Efficiency Urinal

#### SUPPLY SELECTION (Must Specify)

-W Wall (Concealed)

#### FIXTURE MOUNTING & WASTE (Must Specify)

-1 Off-Floor, Wall Outlet

#### FLUSH VALVE GPF's (Must Specify)

-0.125 GPF (HEU)

-0.5 GPF (Not Available in California)

#### FLUSH VALVE OPTIONS (Must Specify)

**\*SEE ACORN DURA-WARE SUPPLEMENTARY MATERIAL FOR FLUSH VALVE COVERS AND BOXES\***

-EVSVFV Master-Trol Electronic Flush Valve (N/A for Top Supply)

-EVSPFV Master-Trol Electronic Flush Valve w/ Piezo Button (N/A for Top Supply)

-FV Flush Valve, Mechanical (N/A for ADA)

-FVBO Flush Valve by Others

-FVH Flush Valve, Hydraulic (N/A for Top Supply)

-FVL Flush Valve, Lever Handle (Wall Supply)

-MTPFV Master-Trol PLUS Electronic Flush Valve

-MTPPFV Master-Trol PLUS Electronic Flush Valve w/ Piezo Button

-MVCFV Time-Trol Electronic Flush Valve (N/A for Top Supply)

#### PRODUCT OPTIONS

-EG Enviro-Glaze (Interior and Exterior)


Color: \_\_\_\_\_

-MT Metal Template



-SW Wall Sleeve

-TF Transformer, 120VAC to 24VAC

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

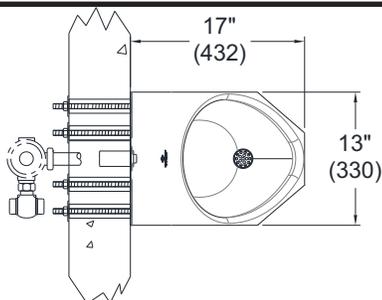

1. Flush Nozzle
2. 1-1/2" O.D. Stainless Steel P-Trap Assembly
3. Optional -W Wall Supply -FV Flush Valve

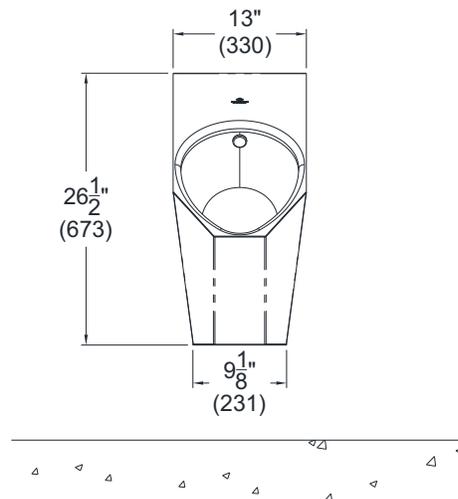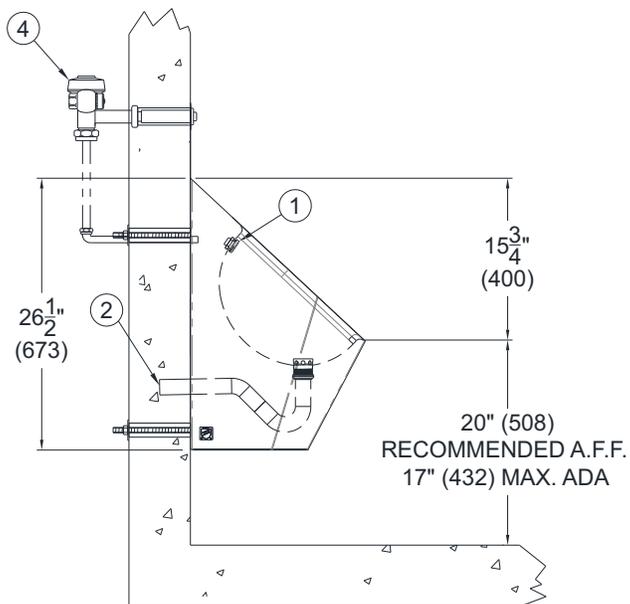

MODEL #LR1709FG-W-1

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2008 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>