

# Model S0000-IWH2

Instantaneous Water Heater - 240 Volts



## SPECIFICATIONS:

Model S0000-IWH2 is a point-of-use, instantaneous water heater with Celcon waterways, Nichrome heating coils and capable of maximum temperature rise of 39°F @ 2.0 GPM. The heater provides adjustment for tepid water requirements of 60°F - 100°F.

## STANDARD EQUIPMENT:

**Heater Assembly:** Rugged steel, white enamel painted housing, Celcon/Ryton element assembly with Nichrome coils that can produce a maximum temperature rise of 39°F at 2.0 GPM.

**Water Supply:** 3/4" NPT male connections. Minimum operating pressure of 25 psi and a maximum operating pressure of 80 psi. Minimum operating flow rate to activate is 1.8 GPM and will flow up to 5 GPM.

**Electrical Requirements:** 240 VAC, 48Amps, 11,500 Watts.

Model: S0000-IWH2



## OPTIONAL ACCESSORIES:

Additional costs may be incurred

- Satin Stainless Steel Housing (SS)
- Disconnect Switch, Rotary 80A-Lockable NEMA 4X (2095-4) (Shipped Loose)



Member of  
U.S. Green  
Building Council



Recyclable  
Product

Acorn Safety assumes no responsibility for use of void or superseded data. © Copyright Acorn Safety®, City of Industry, CA, Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

Submittal # **S0000-IWH2**  
[ACC] Date: 06/30/21

Product complies to the following standards:



Federal  
Public Law  
111-260  
(No Lead)

CALGreen

Test rating conditions are compliant to ANSI Z358.1



Division of  
Acorn Engineering Company®,  
Member of  
Morris Group International™

**ACORN SAFETY**

P.O. Box 3527  
City of Industry, CA  
91744 U.S.A.



Phone 800-591-9372  
626-855-4804

[www.acorneng.com](http://www.acorneng.com)


# TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

*Shown Installed with  
S0560 Eye/Face Wash*

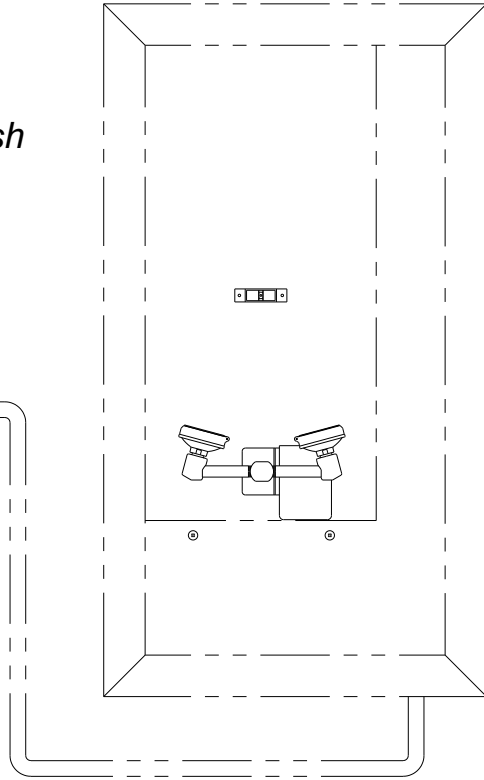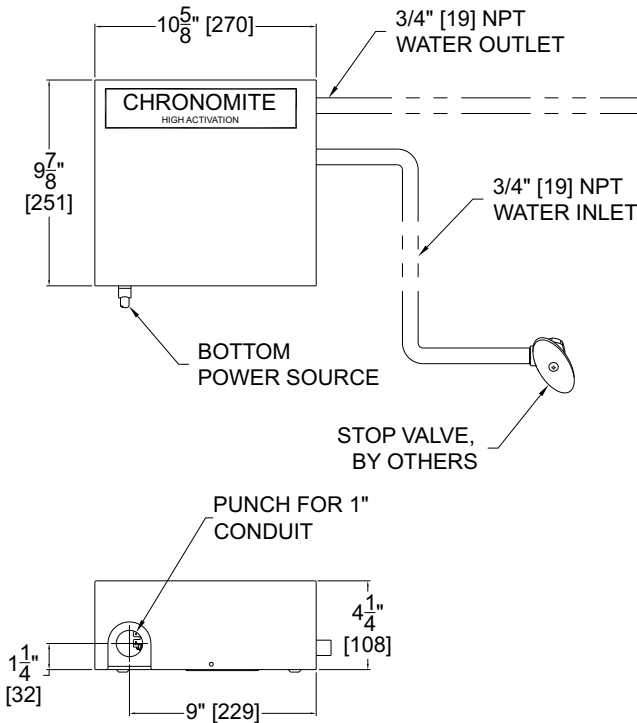

General Notes:  
1. All dimensions in inches [mm].

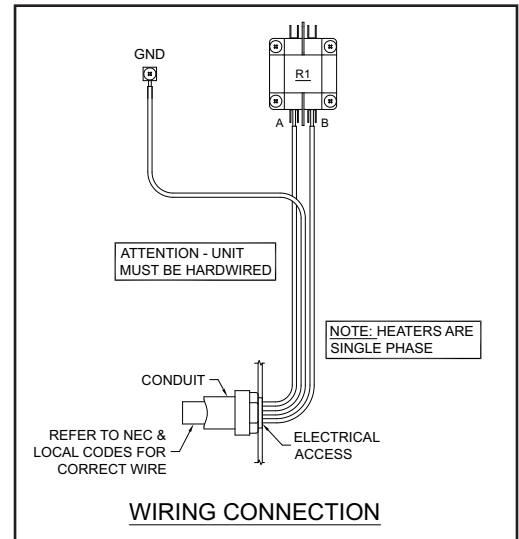

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**S0000-IWH2** Date: 06/30/21

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_



**800-591-9372**  
or 626-855-4804  
[www.acorneng.com](http://www.acorneng.com)