# **Model S0340**

Pedestal Mounted Eye/Face Wash, Stainless Steel Bowl



## **SPECIFICATIONS:**

Model S0340 is a pedestal mounted eye/face wash, with a stainless steel bowl, ABS plastic eye/face wash spray heads, an inline strainer and a stayopen 1/2" ball valve with a push handle.

## STANDARD EQUIPMENT:

Spray Head Assembly: ABS yellow plastic Eye/Face Wash heads supplied by a combined integral 3.7 GPM (14 LPM) Flow Control, with integral flip Dust Covers, internal Flow Controls and Filters to remove debris from the water. An antimicrobial agent is molded into the ABS material, providing integrated protection.

Valve: 1/2" NPT chrome plated brass stay-open ball valve with a stainless steel push handle and a 50 mesh inline strainer.

Water Supply: 1/2" NPT female threaded, chrome plated brass inlet.

Waste: 1-1/4" NPT female outlet.

Bowl: Stainless steel, 11-3/4" diameter

Piping & Mounting: Schedule 40 galvanized steel piping and a 9-1/8" diameter cast iron floor flange with a vellow powder coated finish.

Universal Sign: ANSI compliant, vertical identification sign.

Acorn Safety assumes no responsibility for use of void

or superseded data. © Copyright Acorn Safety®, City of Industry, CA, Division of Acorn Engineering Company®,

Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

Weekly Test Tag: A waterproof test card to record the date and inspector's name for weekly functional testing of the unit.





### Product carries the following certifications:







Acorn Engineering Company® Morris Group International™

#### **ACORN SAFETY** P.O. Box 3527 City of Industry, CA 91744 U.S.A. Phone 800-591-9372 626-855-4804

www.acorneng.com



## **OPTIONAL ACCESSORIES:**

Additional costs may be incurred

☐ -BF Barrier free, handicap accessible □ -CS1 Stainless steel "clam shell" cover

-ET71-1-BVS-OTG Thermostatic mixing valve is ASSE Listed per

the ASSE 1071 standard. The tepid output water complies with ANSI Z358.1 standard. Valve includes Ball Valve Shut-offs and Outlet

Temperature Gauge

□ -FLW2 Flow switch, single pole □I -FPV Freeze protection valve

☐ -HFC Hand foot control

☐ -MS1 MAP (magnetically actuated proximity) switch,

for one (1) actuator

Stainless steel dust covers □ -SDC ☐-SPV Scald protection valve

□ -SV2 Stainless steel ball valve


□ "1" Auxiliary hand-held drench hose with a self-closing valve

(Use model S0341)

## **TECHNICAL DIMENSIONS**

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

☐ Model S0340 : Pedestal Mounted Eye/Face Wash, Stainless Steel Bowl

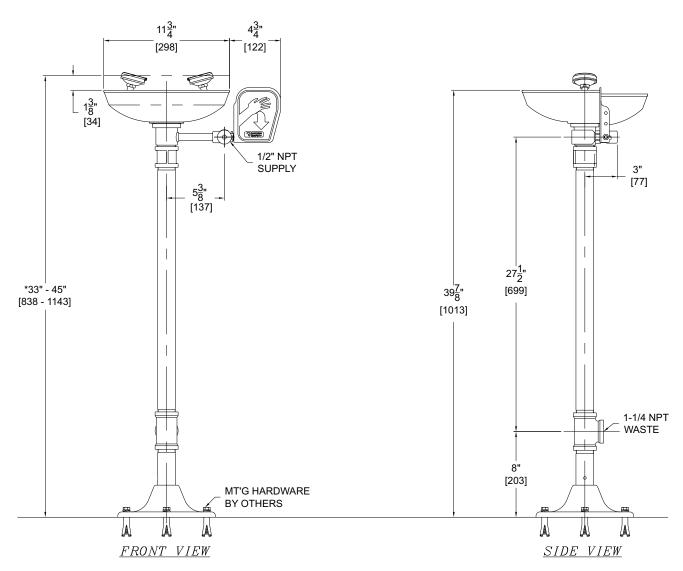

## GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- \*2. ANSI Z358.1 REQUIRES NOZZLES TO BE MOUNTED BETWEEN 33" 45" [838 1143] ABOVE THE FINISHED FLOOR.

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**\$0340** Revised: 01/08/20

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY VAL FOR STURING	Model Number & Options		_Quantity	ACORO SAFETY
ECTION SI APPROVA ANUFACT	Contact	Title		<b>800-591-9372</b> or 626-855-4804
SELE 8,7	Signature (Approval for Manufacturing)	Date		www.acorneng.com