



Penal-Ware® 1736ADA-A Series

Cabinet Shower - ADA Compliant



1736ADA-A-R-03-GB

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Cabinet Shower - ADA Compliant

Cabinet Shower is fabricated from 14 gage, type 304 stainless steel with exposed sides of the exterior and the interior having a satin finish. Shower head location may result in water spray falling outside the shower compartment we recommend a floor drain by others be located near the shower entrance. Optional Wall Sleeve or Metal Template is recommended for all required wall openings.

Shower Panel includes a conventional fixed rear mount shower head provided at a 72" discharge height and a hand shower with mounting bracket at 48" AFF for seated bathers. The hand shower includes 60" long stainless steel hose, hand spray, vacuum breaker and quick disconnect. Unit is optionally available with suffix option -FH Fixed Head mounted at 48" in lieu of the hand shower.

Shower Floor is 14 gage stainless steel with a slip resistant surface and stainless steel reinforcing. Integral drain is supplied with a removable grid strainer and provides for an inside caulk connection to 2" pipe. Note that the shower threshold is 2" high and requires the unit to be recessed into the floor 1-1/2" or be provided with a ramp by others that complies with ADA Accessibility Guidelines.

Regularly furnished items include stainless steel recessed soap dish, tamper-resistant fasteners, hand shower, horizontal welded-in two wall grab bar, removable stainless steel seat, auto-release towel hook welded on outside of door jamb. An optional ADA compliant control valve is available and must be specified.

ADA Conformance

Fixture is intended to meet applicable shower accessibility requirements for ADA, UFAS and ANSI. Compliance is subject to the interpretation and requirements of the local code authority.

GUIDE SPECIFICATION

Provide and install an Acorn ADA Compliant Cabinet Shower (specify model number and options). Cabinet shall be fabricated from 14 gage, type 304 stainless steel. Exposed surfaces shall have a satin finish except the shower floor which shall have a slip resistant, matte finish. A conventional shower head at 72" AFF shall be provided in addition to a hand shower with fixed mounting bracket and a 60" long hand shower. Cabinet shall be provided with a horizontally mounted, two wall grab bar, a stainless steel seat, a towel hook and a recessed soap dish. Unit shall meet applicable shower accessibility requirements for ADA, UFAS and ANSI. Shower cabinet shall be installed according to manufacturer's instructions.

Penal-Ware® 1736ADA-A: Cabinet Shower - ADA Compliant



CHASE WALL MOUNTING (Must Specify)

Left Wall Right Wall Back Wall None

SHOWER LOCATION (Must Specify)

Left Wall Right Wall

POLISHED EXTERIOR WALLS (Must Specify)

Left Wall Right Wall Back Wall None

WALL THICKNESS AND TYPE (Must Specify)

Thickness _____ Type _____

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

1736-ADA-A Cabinet Shower - ADA Compliant

VALVE SELECTION (Must Specify)

- 3 Air-Control, Single Temperature
- 4 Air-Control, H & C
- 9 Punched for Valve by Others (Specify Punching)
- EVS1 Electronic Valve System - Single Temp
- EVS2 Electronic Valve System - Hot & Cold
- MVC1 Time-Trol - Single Temp
- MVC2 Time-Trol - Hot & Cold


Product Options

- CHV Closure Horizontal ___-TF
- CHV Closure Vertical ___-L ___-R ___-C ___-AL ___-AR
- CHW Closure Wall Panel ___-L ___-R
- CSH Conical Showerhead
- F Flow Control 2.0 GPM
- FH Fixed Head at 48" in Lieu of Hand Shower
- FSS Folding Seat, Stainless Steel (See Note *)
- GB 24" Vertical Grab Bar
- GBC Grab Bar w/ Closure Plate
- HAC Closure Horizontal Angled ___-AL ___-AR ___-TSW
- LFS Less Fixed Seat
- LGB Less Grab Bar
- LRD Less Recessed Soap Dish
- MD Modesty Door (Not ADA)
___ Hinged Left ___ Hinged Right
- MT Metal Template (Only 1 Required Per Project)
- PBH Hemispherical Pushbuttons
- STC Sloping Top Closure
- SW Wall Sleeve
- TA Threshold Anchors
- VG Vent Grille, 8-3/4" x 8-3/4" (10" sq Free Area)
___ Left Wall ___ Right Wall ___ Back Wall

Please visit www.acorneng.com for most current specifications.

***NOTE: Folding Seat Is Not Recommended For Use In Areas Prone To Vandalism And/or Suicide.**

1. Optional 24" Vertical Grab Bar
2. Fixed Showerhead At 72"
3. Recessed Soap Dish
4. Valve Pushbutton
5. Handheld Shower With 60" S.S. Hose
6. Horizontal Two Wall Grab Bar
7. Optional Folding Stainless Steel Seat (See Note *)
8. 2" Inside Caulk Waste Thru Floor
9. Removable Access Panel W/ Vandal Resistant Screws
10. Optional -CHW_L Closure Wall Panel
11. Collapsible Towel Hook
12. Wall Mounting Tabs
13. Optional -TA Threshold Anchors Shown

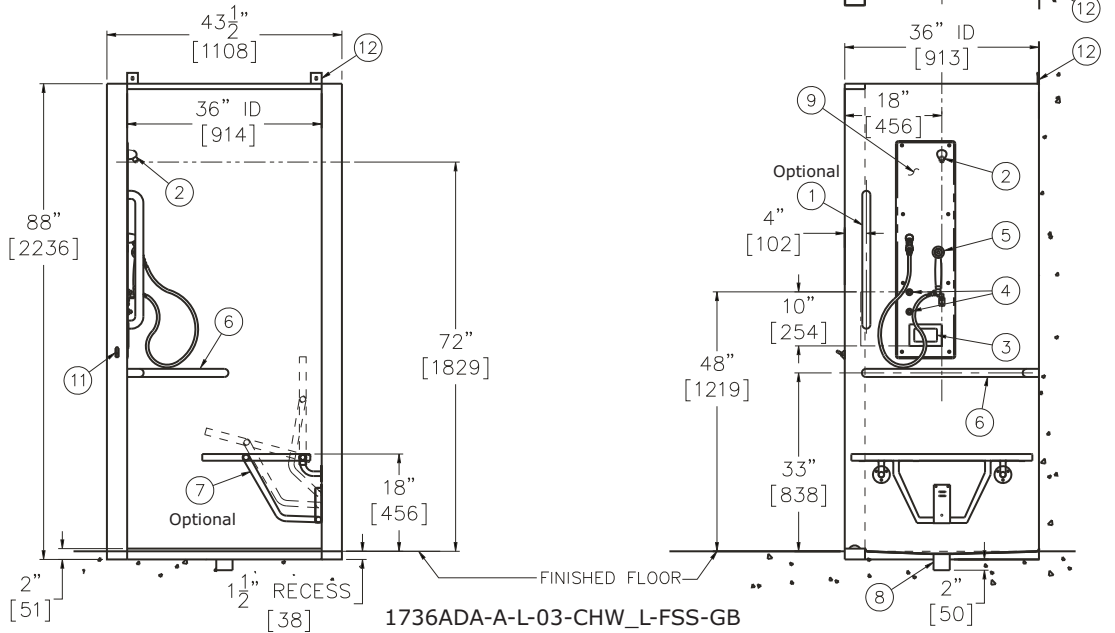

Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company

<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>
---	---