



## Terrazzo-Ware™ Shower Base - Integral Threshold Series, Corner Fixtures



SBC-36-2F

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Shower Base With Integral Threshold, Corner Fixtures

**Shower Base** is an attractive, easy to maintain, spacious shower receptacle. It is designed for durability and ease of installation. **ACORN Terrazzo-Ware™** precast shower bases provide flexibility in configuration and size as required by the design of the building and the specific installation. Custom sizes and colors are also available.

**Integral Thresholds** on three sides provide an attractive entry into the shower. The 3" wide threshold allows installation of a shower door. The non-threshold sides have galvanized tiling flanges which extend 1½" above the 1¼" wide shoulder.

**Construction** is one piece, precast terrazzo composed of marble chips cast in Portland cement to provide a compressive strength of at least 3,000 PSI seven days after casting. The shower base surface is ground smooth and sealed to provide years of service.

**Integral Drain** is supplied with a removable, stainless steel grid strainer and provides for an inside caulked connection to a 2" pipe. The shower base has coved corners and is pitched to the drain outlet to provide positive drainage. A vandal resistant strainer is optionally available.

#### GUIDE SPECIFICATION

Provide and install an **ACORN Integral Threshold Corner Shower Base** (specify model number and options). Shower Base shall be made of precast terrazzo to produce a compressive strength of not less than 3,000 PSI seven days after casting. Base shall be ground smooth and sealed. No air holes or pits shall be allowed on the finished surface. Base shall have coved corners and be pitched toward the drain outlet for positive drainage. Integral drain shall have a stainless steel strainer and provide for an inside caulked connection to a 2" pipe. The manufacturer will provide to the installer the necessary installation instructions.

# Terrazzo-Ware™: Shower Base-Integral Threshold Series



## BASE MODEL & TYPE

### SIZE (must specify)

- SBC-32-2F** 32" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-34-2F** 34" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-36-2F** 36" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-38-2F** 38" Terrazzo Shower Base, Corner, Two Corner Sides Flanged
- SBC-40-2F** 40" Terrazzo Shower Base, Corner, Two Corner Sides Flanged

## SUFFIX OPTIONS



- OC Optional Colors (contact factory)
- VRS Vandal Resistant Strainer

## ACCESSORIES

- KDG2 Rubber Drain Gasket for 2" Waste Pipe

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

MODEL NUMBER	TYPE	SIZES/DIMENSIONS		
		A – LENGTH	B	C
SBC-32-2F	CORNER	32" (815)	14" (355)	25-1/2" (650)
SBC-34-2F	CORNER	34" (865)	17" (430)	24" (610)
SBC-36-2F	CORNER	36" (915)	17" (430)	26-7/8" (685)
SBC-38-2F	CORNER	38" (965)	18" (450)	28-1/4" (720)
SBC-40-2F	CORNER	40" (1015)	20" (510)	28-1/4" (720)

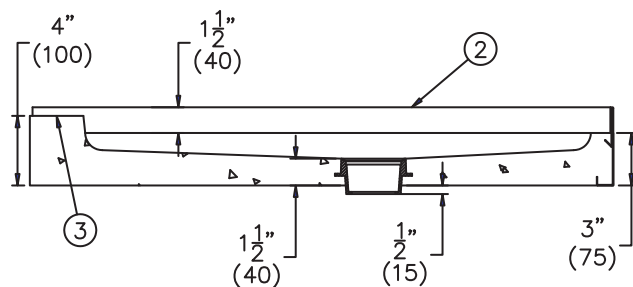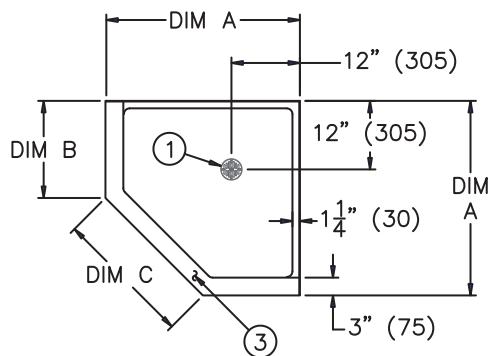

NOTE: TERRAZZO-WARE INTEGRAL THRESHOLD SERIES CORNER SHOWER BASES

- 1. Integral drain with removable grid strainer. Drain provides an inside connection to 2" pipe.
- 2. Tiling Flange.
- 3. Shower base threshold.

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2002 Acorn Engineering Company	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>