




## Penal-Ware® 1698 Series

Squat Toilet

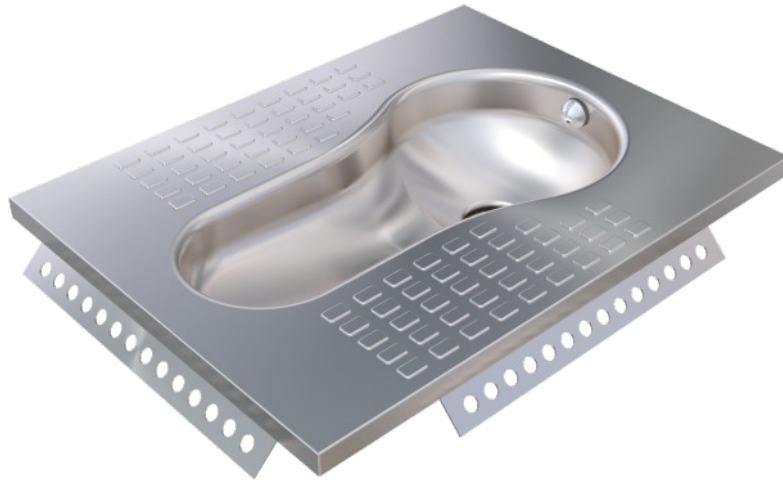

1698-W-3

Fixture May Show Some Available Options

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Squat Toilet

Squat Toilet intended to be recessed in the floor.

**Fixture** is fabricated from one piece of 18 gage, type 304 stainless steel with exposed surfaces polished to a satin finish. Toilet includes a mushroom style rinser with a 3/4" NPS male connection. Toilet waste outlet is 3" O.D. plain end.

#### GUIDE SPECIFICATION

Provide and install Acorn Penal-Ware Squat Toilet. Fixture shall be fabricated from one piece of 18 gage, type 304 stainless steel with exposed surfaces polished to a satin finish. Shall have a mushroom style rinser with 3/4" NPS male connector. Bottom area shall maintain a minimum water surface. Toilet waste outlet shall be 3" O.D. plain end.

# Penal-Ware® 1698: Squat Toilet



## MODEL NUMBER AND OPTIONS SELECTION

### BASE MODEL NUMBER

☒ 1698 Squat Toilet

### SUPPLY (Must Specify)

☒ -W Wall (Concealed)

### FIXTURE MOUNTING AND WASTE (Must Specify)

☒ -3 On-Floor, Floor Outlet

### FLUSH VALVE GPFs (Must Specify)

☒ -1.5 GPF (5.68 LPF)

### FLUSH VALVE OPTIONS (Must Specify)

**\*REFER TO ACORN DURA-WARE ACCESSORIES FOR REMOTE FLUSH VALVE BOX #2803-1 AND FLUSH VALVE PANEL #2898**

☐ -EVSFV Master-Trol® Electronic Flush Valve

☐ -EVSPFV Master-Trol® Electronic Flush Valve w/ Piezo Button

☐ -FV Flush Valve, Mechanical

☐ -FVBO Flush Valve by Others

☐ -FVH Flush Valve, Hydraulic

☐ -MTPFV Master-Trol® PLUS Electronic Flush Valve

☐ -MTPPFV Master-Trol® PLUS Electronic Flush Valve w/ Piezo Button


☐ -MVCFV Time-Trol® Electronic Flush Valve

## PRODUCT OPTIONS

☐ -TF Transformer, 120VAC to 24VAC (-MVCFV option)


☐ -VAC AcornVac Systems

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

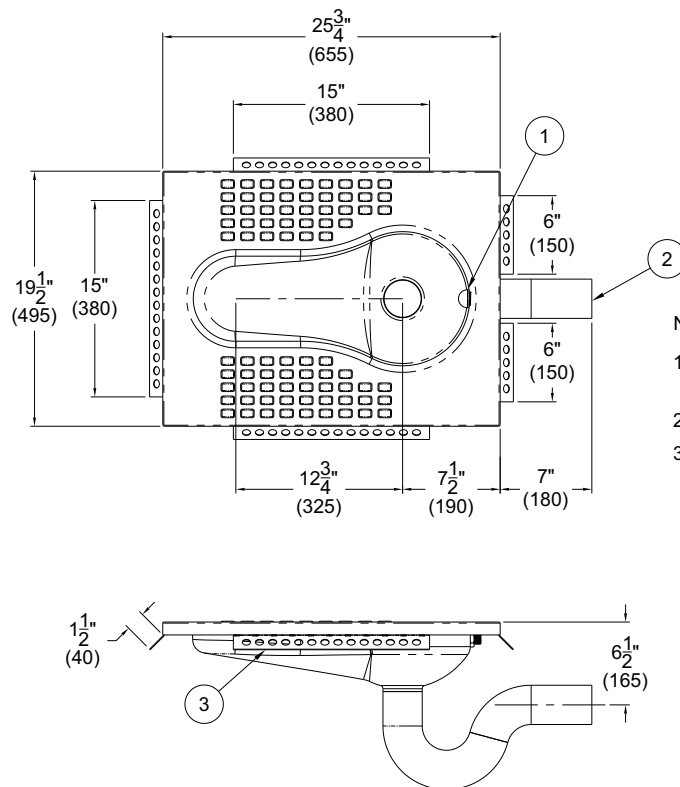

### NOTES:

1. MUSHROOM STYLE RINSER WITH 3/4" NPS MALE CONNECTION
2. 3" O.D. STAINLESS STEEL PLAIN END P-TRAP
3. GALVANIZED STEEL ANCHORING FLANGES

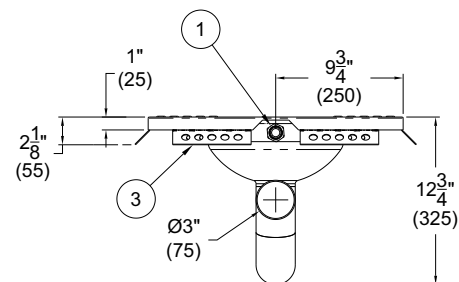

1698-W-3

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2008 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>