

Meridian[®] 3771 Series Meridian[®] Corterra[®] Curved Front Uni-Basin - ADA Compliant



Please visit **www.acorneng.com** for most current specifications.

Meridian[®] Corterra[®] Curved Front Uni-Basin - ADA Compliant

Meridian[®] **Corterra**[®] **Curved Front Uni-Basins** are engineered to combine the look and feel of commercial-grade designer Basins and Countertops with the durability and economy of group fixtures. Each standard height Washbasin complies with ANSI, UFAS and ADA requirements. Compliance is subject to the interpretation and requirements of the local code authority.

Countertop, Basin and Integral Sprayhead are constructed of Corterra[®] solid surface polymer resin. Integral sprayhead includes an Access Panel and vandal-resistant Spray Nozzle. Basin includes Overflow, Grid Strainer, Waste piping and 1-1/2" P-Trap.

-H Hand Operation includes a deck mounted Pushbutton and Integral Sprayhead with 0.5 GPM Flow Control. Pushbutton Air-Control actuation provides adjustable metering up to 60 seconds. Pushbutton requires less than 5 pounds of force to activate Valve.

-SO Sensor Operation includes an Infrared Sensor actuated Integral Sprayhead with 0.5 GPM Flow Control and powered by a plug-in Transformer provided.

Mixing Valve delivers tempered water flow by compensating for pressure and temperature fluctuations and is ASSE 1070 compliant. Valve is to be field set to 105° Fahrenheit and includes Strainers and Integral Checks. Operating range is 30 PSI to 100 PSI.

Off-Floor Models include a P-Trap Enclosure to conceal hot and cold Mixing Valve assembly and P-Trap with 14 gage stainless steel Frame and gray vinylclad, galvanized steel Enclosure. Wall requires adequate backing to support Washbasin.

On-Floor Models include a Pedestal Base with 14 gage stainless steel Frame, stainless steel Scuff Panel, and gray vinylclad, galvanized steel Enclosure. Enclosure conceals Valves, Piping, Supply and Waste connections. Pedestal Base is wall mounted and supported on-floor.

-PDM Pump Type Soap Dispenser is optionally available for liquid and lotion type Soaps. Dispenser is deck mounted with an under-the-counter Reservoir and top refill feature for ease of maintenance.

Unit Certification complies with IAPMO IGC 156, CSA B45 Series, ASME A112.18.1/CSA B125.1

Material Certification: Corterra[®] physical properties are in compliance with CSA B45.5/IAPMO Z124 and ANSI/ISCPA SS-1 and is GREENGUARD Gold certified.

GUIDE SPECIFICATION

Meridian[®] Corterra[®] Curved Front One-Person Washbasin by Acorn (Specify model number and options). Unit with 34" standard height rim to conform with ANSI, UFAS and ADA Accessibility Standards. Provide integral round Basin (15-3/4" x 5" deep) each with an integral, rear Overflow. Basin, Countertop, Backsplash and Sprayhead to be constructed of (Specify color) Corterra[®] solid surface polymer resin. Spray Nozzle to be vandal-resistant. Provide Sprayhead Access Panel. Wall mounted Pedestal Frame to be constructed of heavy gage, stainless steel. Enclosure to be constructed of vinylclad galvanized steel. Provide heavy gage, type 304 stainless steel Scuff Panel. Operation: (Specify) Provide individual Solenoid Valve activated by Infrared Sensor with plug-in Transformer. Washbasin to be furnished complete with the following: ASSE 1070 Compliant Temperature/Pressure Balancing Mixing Valve, Checks, Supply and Waste connections to the wall and 1-1/2" P-Trap.



Revised: 09/27/2023

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • www.acorneng.com • E-mail: info@acorneng.com

Meridian[®] 3771: Meridian[®] Corterra[®] Curved Front Uni-Basin - ADA Compliant

BASE MODEL NUMBER (Must Specify)

3771 Meridian[®] Corterra[®] Curved Front Uni-Basin

FIXTURE MOUNTING & WASTE (Must Specify)

□ -1 □ -2	Off-Floor, Wall Outlet On-Floor, Wall Outlet	
OPERATION (Must Specify)		
P- P	Less Sprayhead and Va	

🛄 -9	Less Sprayhead and Valves
	(Only Available with -RLD Basin)
🔲 -CSG	4" Centerset Faucet with
	Gooseneck Spout and Wrist Blade Handles
	(Includes -RLD Basin & -H34)
🛄 -Н	Hand Operation
🗋 -PPZ	Programmable Piezo Button
	Electronic Metering
🗋 -SO	Sensor Operation
🔲 -SO-BAT	Sensor Operation, Battery Powered
	(Batteries Not Included)

CORTERRA® COLOR OPTIONS (Must Specify)


Color: (Refer to https://www.acorneng.com/corterra-solid-surface for available colors — -VP

COUNTER	COUNTERTOP OPTIONS		
🔲 -ECL	Extended Countertop - Left Hand,		
	Specify (120" maximum overall width)		
🔲 -ECR	Extended Countertop - Right Hand,		
	Specify (120" maximum overall width)		
🔲 -LSA	Left Side Apron (Only Available with -ECL)		
-LSS	Left Side Splash (Only Available with -ECL)		
🔲 -RSA	Right Side Apron (Only Available with -ECR)		
-RSS	Right Side Splash (Only Available with -ECR)		
PRODUCT	OPTIONS		
🗆 -JH	31" Junior Rim Height		
	(Not ADA Compliant Except as -1-JH-SES)		
🔲 -PDM	Metering Liquid Soap Dispenser		
-RLD	Molded-in "D" Shape Corterra [®] Basin		
—	(Specify Punching for -9, Valve by Others)		
	□ -H1 Single Hole; On Center		
	-H24 4" Centerset; Two Holes		
	-H34 4" Centerset; Three Holes		
	-H38 8" Centerset; Three Holes		
-SES	Scalloped Enclosure Style		
🔲 -SPX	16 Gage Stainless Steel Enclosure		
🗍 -ST	Single Temperature Valve		

Vinylclad Enclosure -

Specify: Gray (Std.) Black White

Please visit www.acorneng.com for most current specifications.

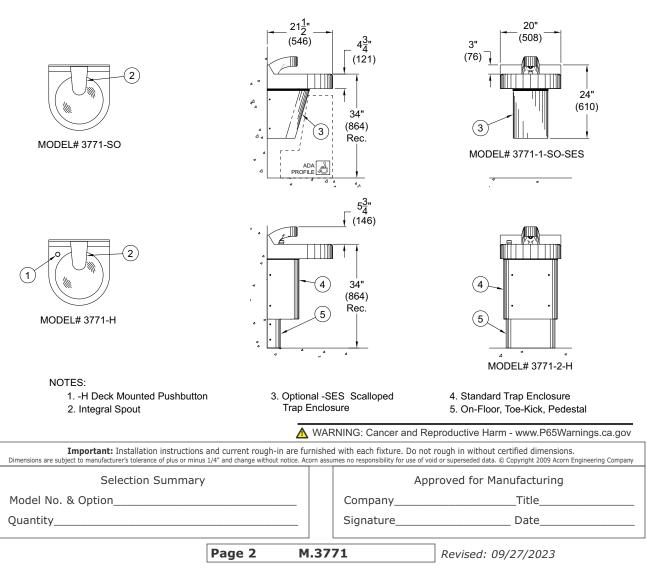

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • www.acorneng.com • E-mail: info@acorneng.com