Model S0340-FPB

Pedestal Mounted Eye/Face Wash Stainless Steel Bowl, Frost Proof Bury



SPECIFICATIONS:

Model S0340-FPB_ is a pedestal mounted eye/face wash, with a stainless steel bowl, ABS plastic eye/face wash spray heads and a frost proof bury valve with a push handle. Valve and supply are buried below the frost line to protect the unit from freezing. The assembly is designed to drain completely, thus leaving no residual water in the unit and preventing it from freezing. Standard bury lengths are 24", 36" and 48". Specify the bury depth of the valve with the last two (2) digits of the model number (i.e. S0340-FPB24 for 24" bury).

STANDARD EQUIPMENT:

Spray Head Assembly: ABS yellow plastic Eye/Face Wash heads supplied by a combined integral 3.7 GPM (14 LPM) Flow Control, with integral flip Dust Covers, internal Flow Controls and Filters to remove debris from the water. An antimicrobial agent is molded into the ABS material, providing integrated protection.

Valve: 3/4" NPT freeze-resistant valve and push handle. The valve and supply are buried below the frost line to protect the unit from freezing. The valve has a bleed outlet to prevent the accumulation of water within the unit, thus permitting it to drain after each

Water Supply: 3/4" NPT male inlet.

Waste: 1-1/4" NPT female outlet.

Bowl: Stainless steel, 11-3/4" diameter

bowl.

Piping & Mounting: Schedule 40 galvanized steel piping and a 9-1/8" diameter cast iron floor flange with a yellow powder coated

Universal Sign: ANSI compliant, vertical identification sign.

Weekly Test Tag: A waterproof test card to record the date and inspector's name for weekly functional testing of the unit.



OPTIONAL ACCESSORIES:

Additional costs may be incurred

MAP (magnetically actuated proximity) switch, ☐ -MS1

for one (1) actuator

□ -SDC Stainless steel dust covers





Acorn Safety assumes no responsibility for use of void or superseded data. © Copyright Acorn Safety®, City of Industry, CA, Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

Submittal # SO340-FPB [EFW] Revised: 01/08/20

Product carries the following certifications:








City of Industry, CA 91744 U.S.A. Phone 800-591-9372 626-855-4804

www.acorneng.com

TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit

☐ Model S0340-FPB_ : Pedestal Mounted Eye/Face Wash, Stainless Steel Bowl, Frost Proof Bury

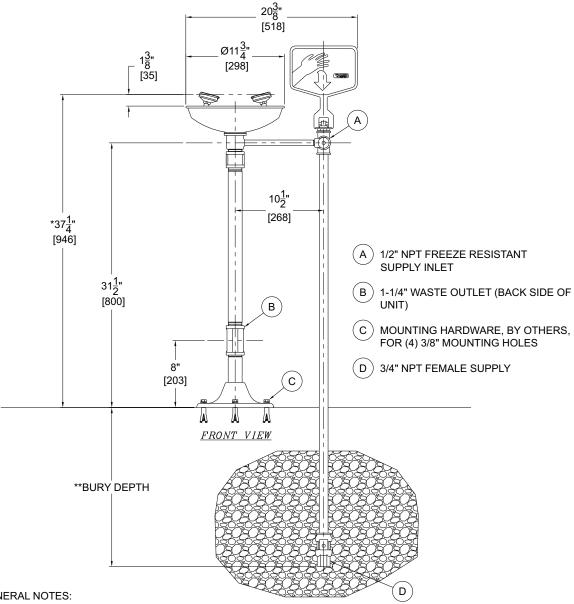

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. ANSI Z358.1 REQUIRES NOZZLES TO BE MOUNTED BETWEEN 33" 45" [838 1143] ABOVE THE FINISHED FLOOR.
- **3. STANDARD BURY DEPTHS ARE 24, 36, AND 48 INCHES. OTHERS ARE AVAILABLE UP REQUEST.

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

\$0340-FPH Revised: 01/08/20

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acom's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY VAL FOR STURING	Model Number & Options Company	Quantity	ACORO
SELECTION SU & APPROVA MANUFACTI	Contact		800-591-9372 or 626-855-4804 www.acorneng.com